




DA 10-130/T

- vandal-proof
- aluminium housing
- quick mounting



The 10W powered speaker is equipped with a 130mm full-range loudspeaker chassis and a 100V line transformer with 4 power adjustments. A robust powder-coated aluminum housing in RAL 9010, and a vandal-resistant feet ensure a permanent installation of this speaker.

The speaker is secured with the high protection class IP 66 against the risks of environmental influences. The speaker is connected by a 5-pin connection cable with 1 meter length.

Perfectly suitable for the installation in corridors and hallways.

Special paint of the speaker in 4-digit RAL- or NCS-colour available at extra cost.

Technical Data


Description	DA 10-130/T
Power	10/6/3/1,5 W
Frequency Range	200 - 22.200 Hz
Frequency Response	150 - 23.500 Hz
SPL 1W/1m, peak	101,0 dB
Sensitivity 1W/1m	98,9 dB
Dispersion (-10dB)	360° (h) / 360° (v)
Temperature range	-40 / +100 °C
Dimensions	164x202x109 mm
Weight (net)	1,90 kg
Colour	RAL 9010
Connector	5-pin cable
Mounting	Screws
Packing Unit	12
IP Rating	IP66

Product Attributes




Polar Diagrams


Copyright by Four-Audio GmbH & Co KG Licensed to AAC

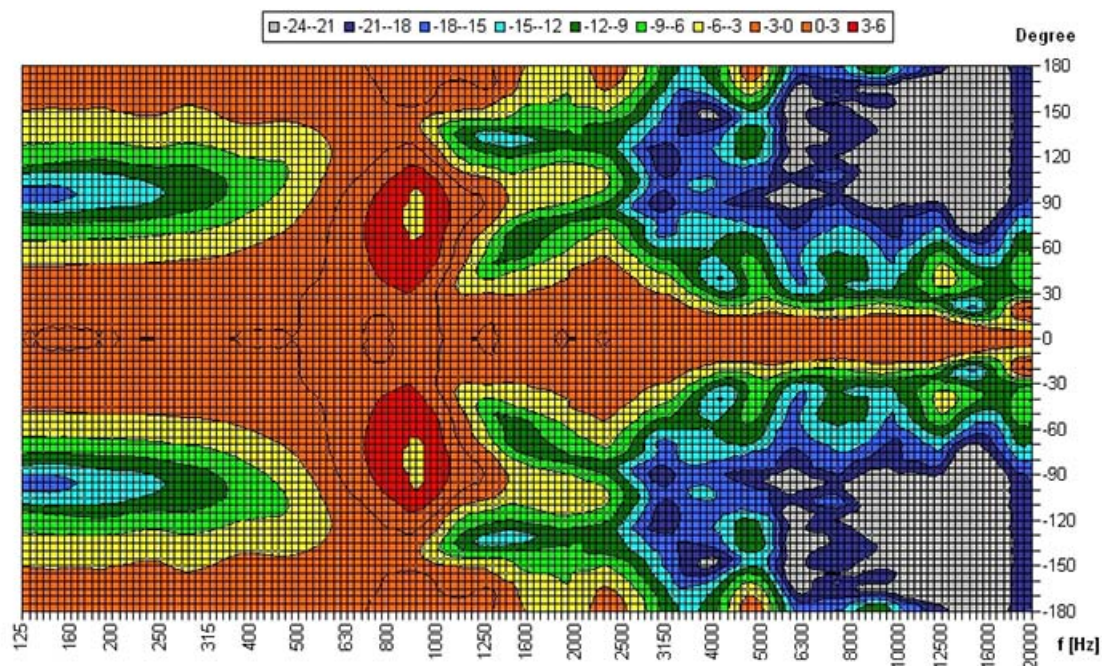


Frequency Response Diagrams

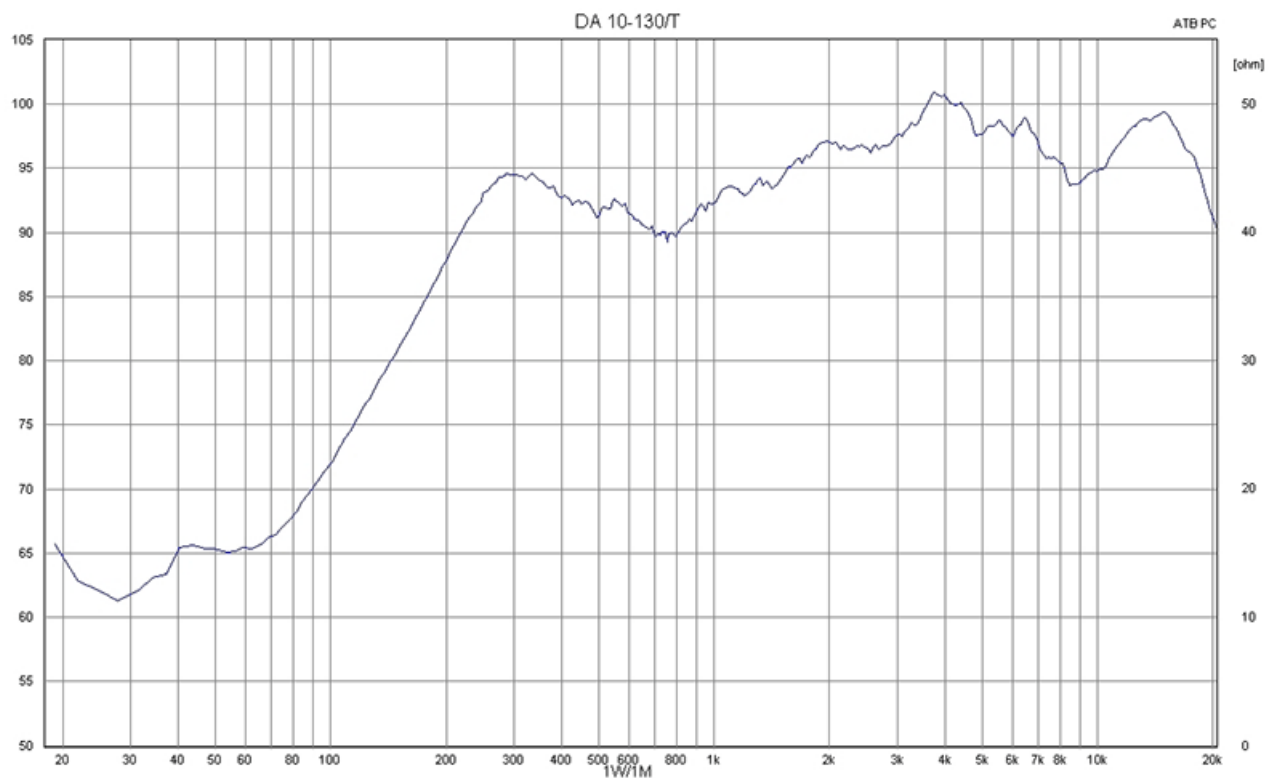

Technical Diagrams

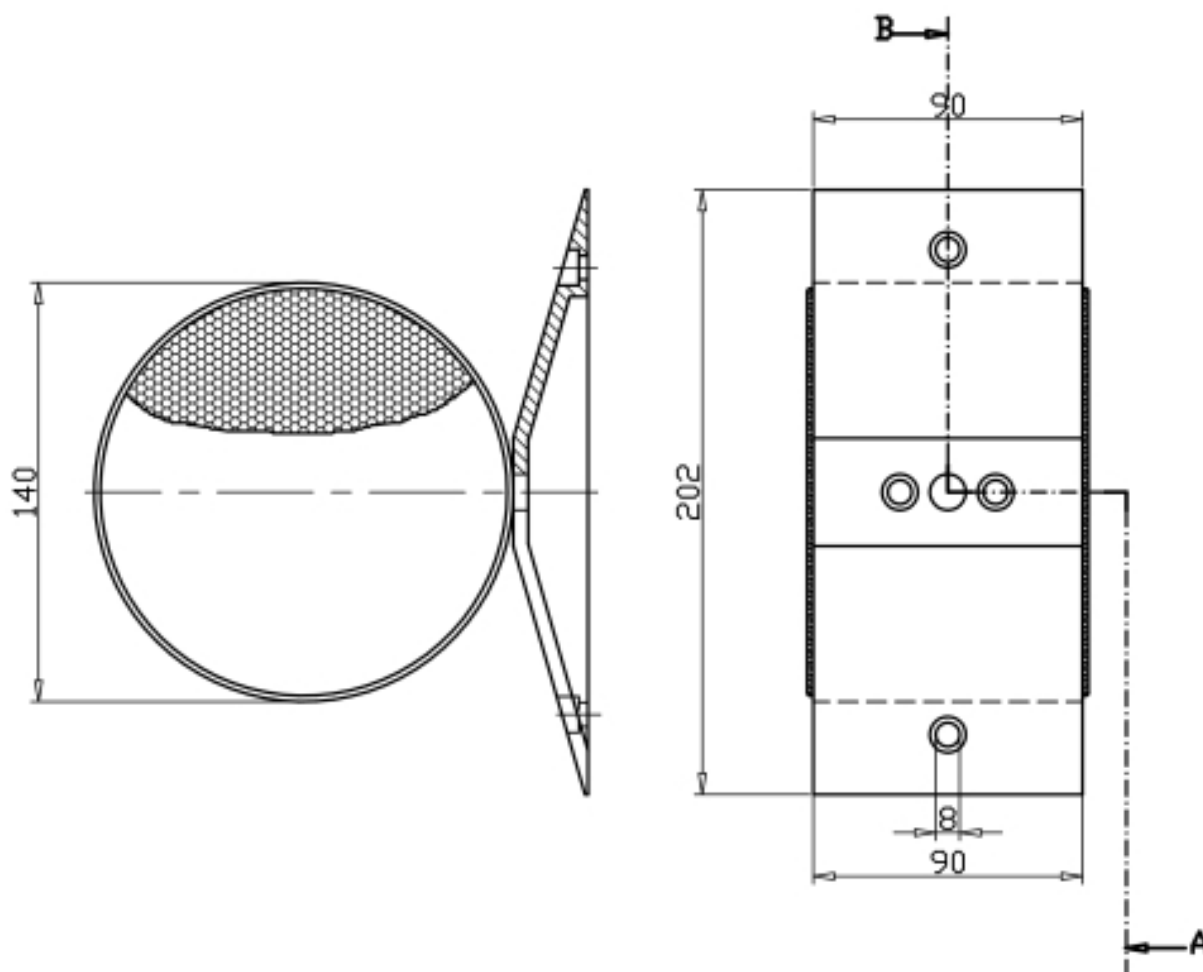

RoHS compliant (2011/65/EU)



Article Nr.:
62609110

Packing Unit:
12

