



DL-BR 30-165/T plus

- excellent sound
- strain relief
- easy power adjustment

The 30W speaker is equipped with a powerful 165mm 2-way system and a 100V line transformer with 4 power adjustments. Also, the low impedance operation with 8 ohm is possible. The power adjustment can be made later on the front even after installation of the speaker. The impact-resistant ABS housing in RAL 9010 guarantees long-term stability.

Quick and easy mounting with screws. The connection is easily done by a stable 4-pin screw terminal.

Perfectly suitable for installations where high sound quality is needed.

This speaker is suitable for a ceiling strength of about 3 – 38 mm. Our specification is primarily related to solid ceilings, for ceilings with soft materials a higher ceiling thicknesses could be necessary. In addition, stronger cables and other fittings may also result in changes of the appropriate setup. With regard to the variety of materials and manufacturers, we recommend to build in a sample of the speaker to match the requirements accurately.

Technical Data







Description	DL-BR 30-165/T plus
Power	30/15/7,5/3,75 (8) W
Frequency Range	103 - 23.500 Hz
Frequency Response	90 - 24.000 Hz
SPL 1W/1m, peak	104 dB
SPL Pmax/1m, peak	118,8 dB
Sensitivity 1W/1m	99,4 dB
Dispersion (-10dB)	180° (h) / 180° (v)
Temperature range	-20 / +80 °C
Dimensions	250x199 mm
Weight (net)	3,10 kg
Colour	RAL 9010
Connector	4-pin screw terminal
Mounting	Screws
Packing Unit	4
Ceiling Cut-out	222 mm

Please note: Because of many different types of ceiling materials and ceiling strengths we recommend to build in a sample of the speaker to match the requirements accurately.


Product Attributes




Polar Diagrams

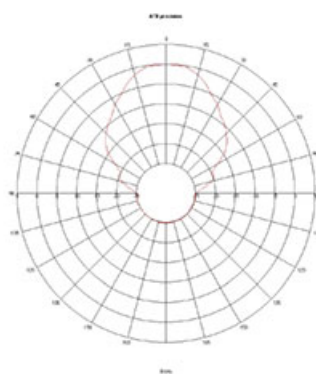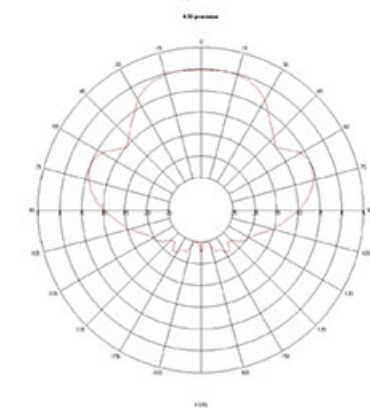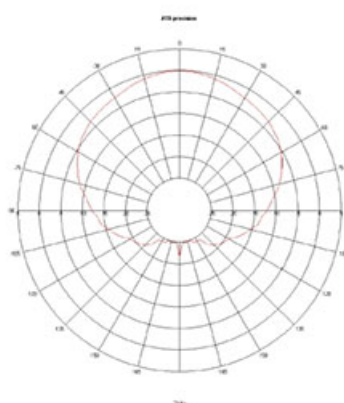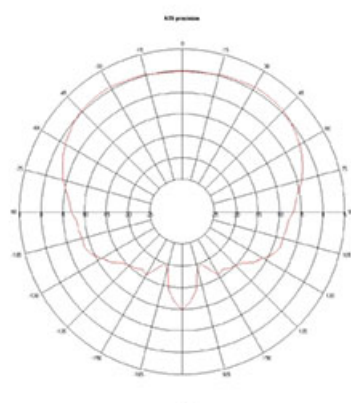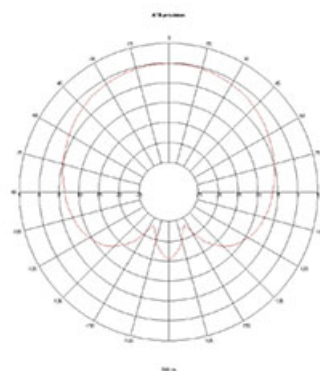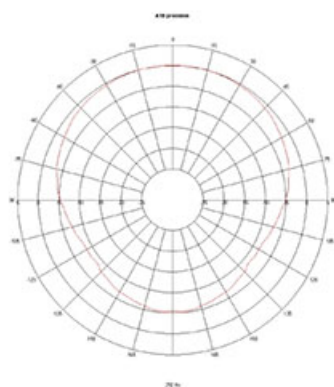


Frequency Response Diagrams

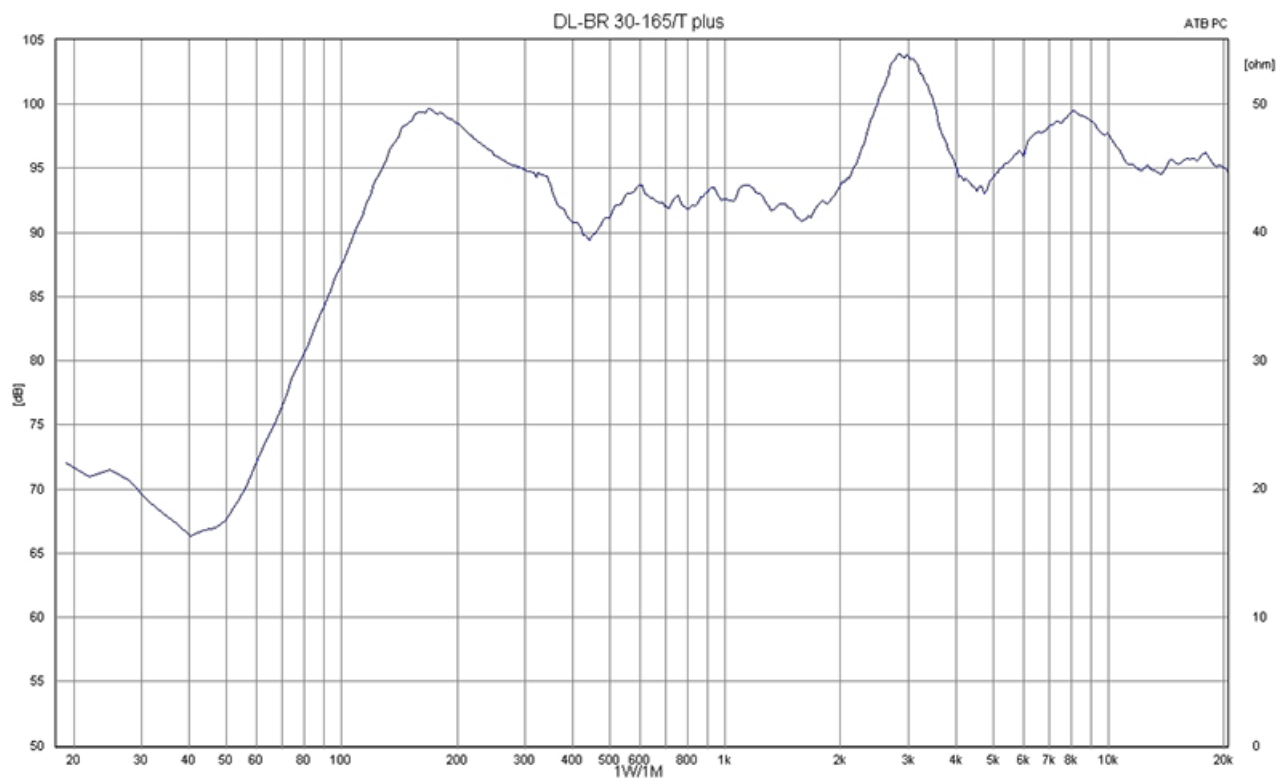

Technical Diagrams

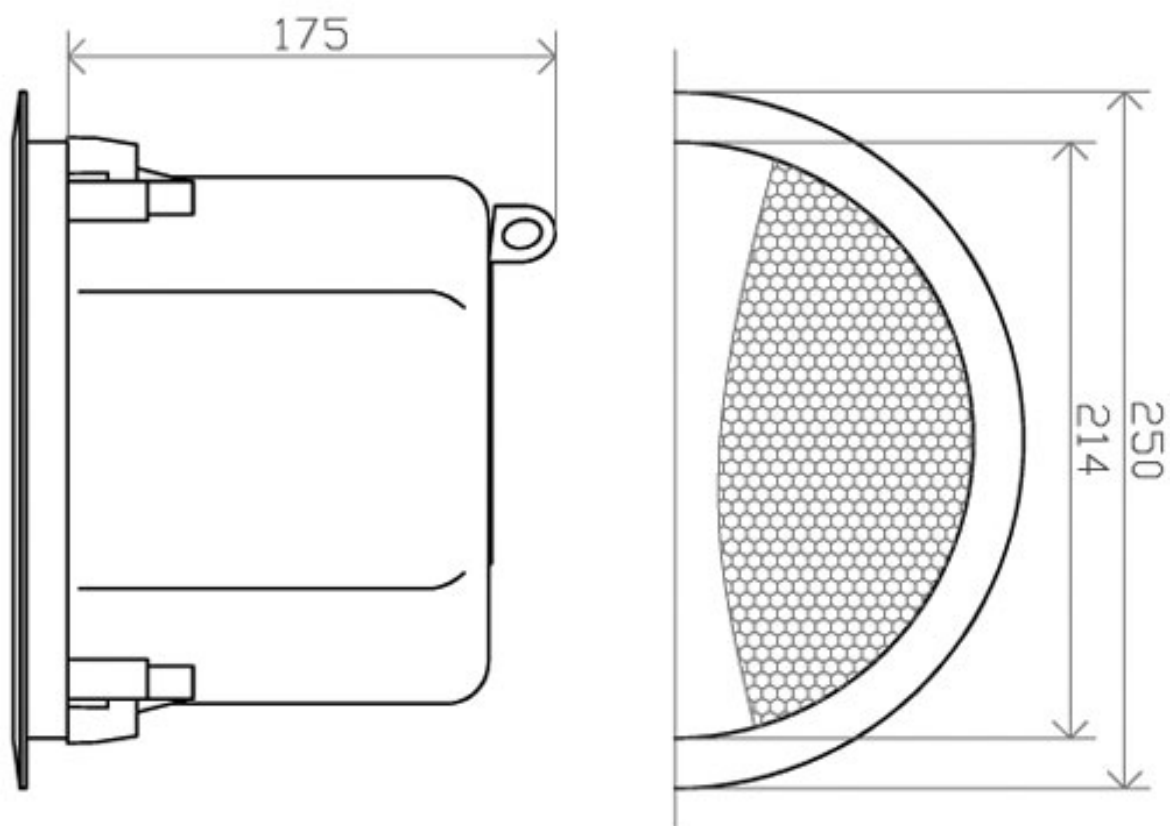

RoHS compliant (2011/65/EU)



Article Nr.:
20030269

Packing Unit:
4

