



MS 30-130/T white-EN54

- Distinctive design
- Excellent sound
- IP 65



EN 54-24:2008
Ref. Nr.: 011-13
ID-Code: SAA-LS11
 1438-CPR-0998

ic audio GmbH, Boehringerstraße 14a,
 D-68307 Mannheim, Germany

CE-Symbol gemäß Richtlinie 93/68EWG

Technical Data (Electrical)

Description	MS 30-130/T white-EN54
Power	30/15/7,5/3,75 (8ohm) W
Impedance (100V)	333/667/1333/4000 ohm
Frequency Range	60 - 24.000 Hz
Frequency Response	50 - 25.000 Hz
SPL IEC268-5, 1W/1m	82,4 dB
SPL EN54-24, Pmax/4m	86,0 dB
Sensitivity EN54-24, 1W/4m	70,4 dB
Sensitivity EN54-24, 1W/1m	82,4 dB
Dispersion -6dB, 500Hz	360 ° (h) 360 ° (v)
Dispersion -6dB, 1KHz	200 ° (h) 160 ° (v)

Dispersion -6dB, 2KHz 130° (h)
100° (v)

Dispersion -6dB, 4KHz 120° (h)
40° (v)



Technical Data (Mechanical)


Dimensions	260x160x152 mm
IP Rating	IP65
Weight (net)	2,50 kg
Temperature range	-25 / +80 °C
Mounting	Swivel bracket
Connector	6-pin screw terminal
Terminal diameter	2,5 mm
Maximum cable passage	4,9 mm ²
Colour	white

Product Attributes





Technical Diagrams

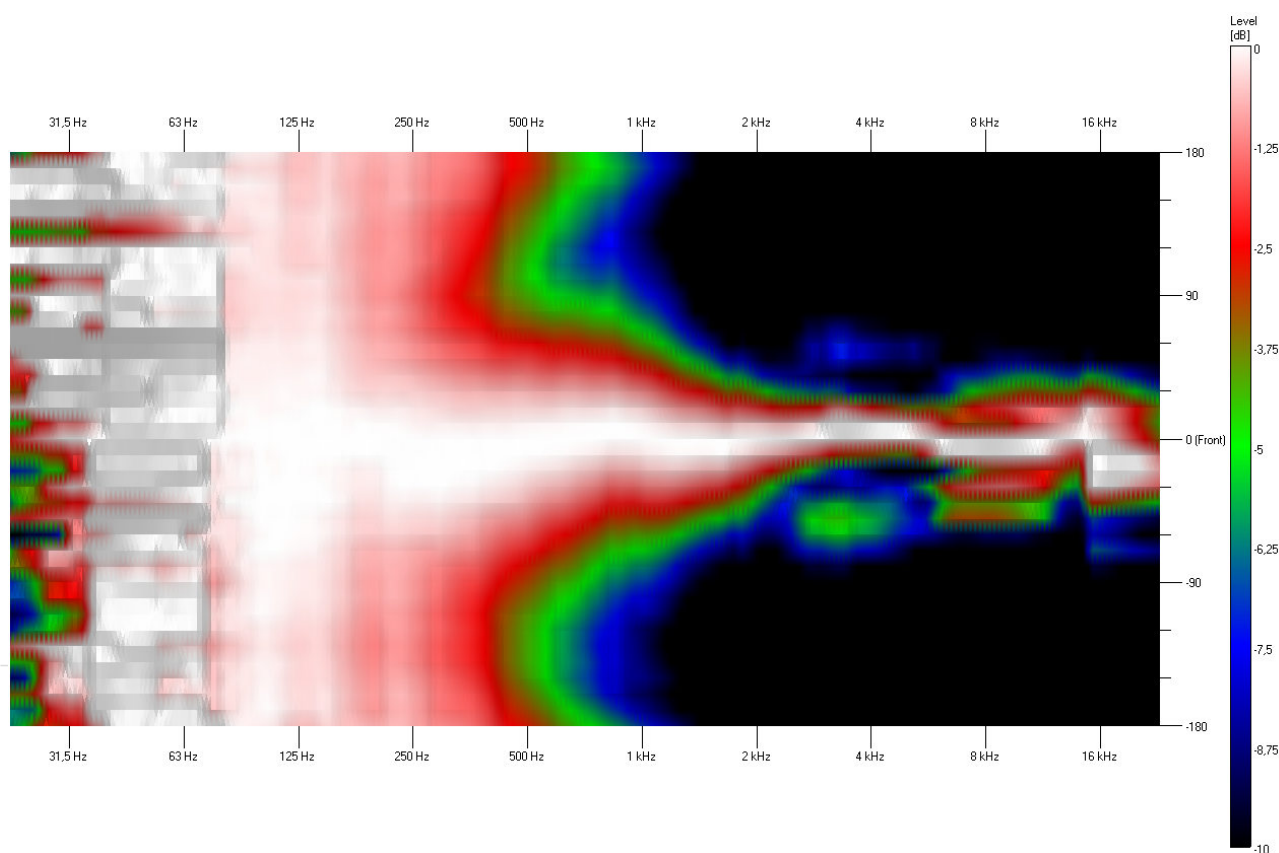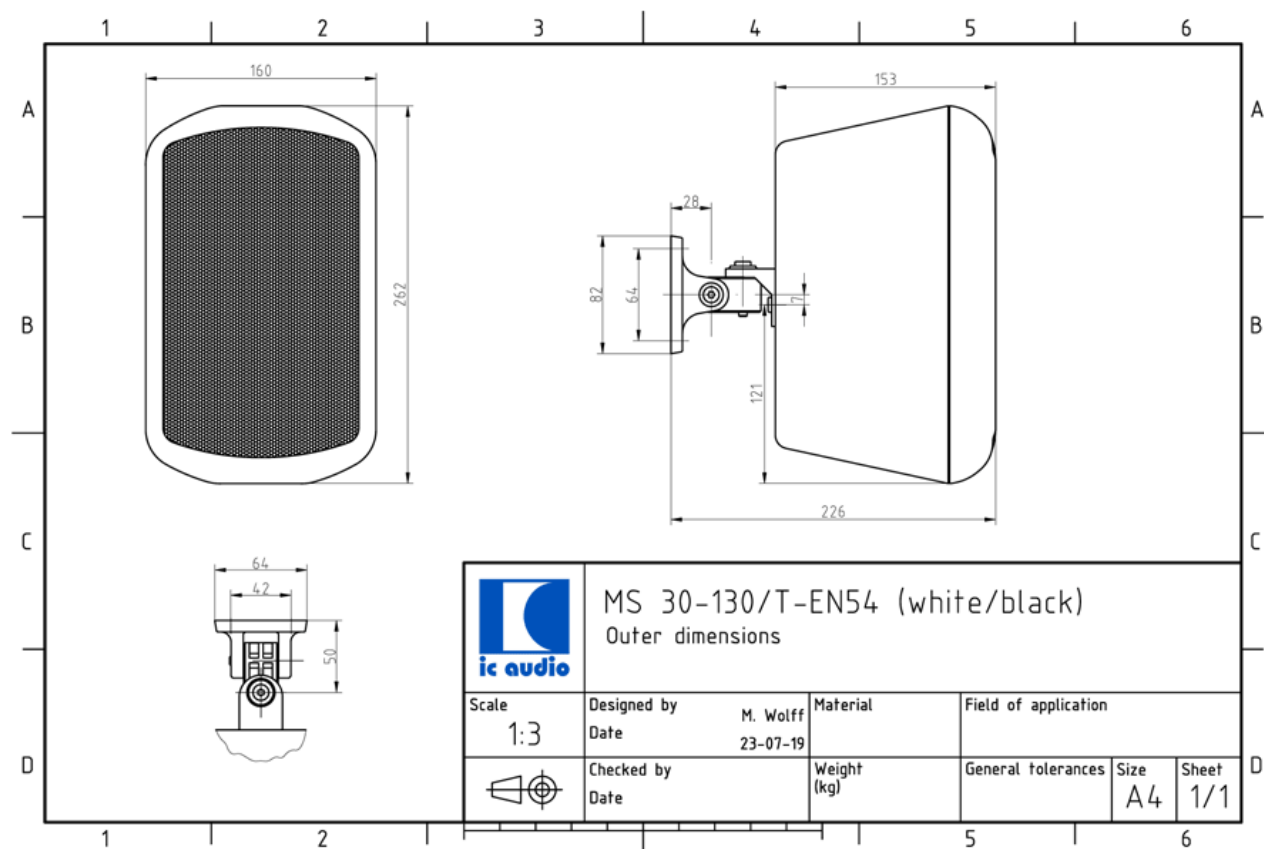

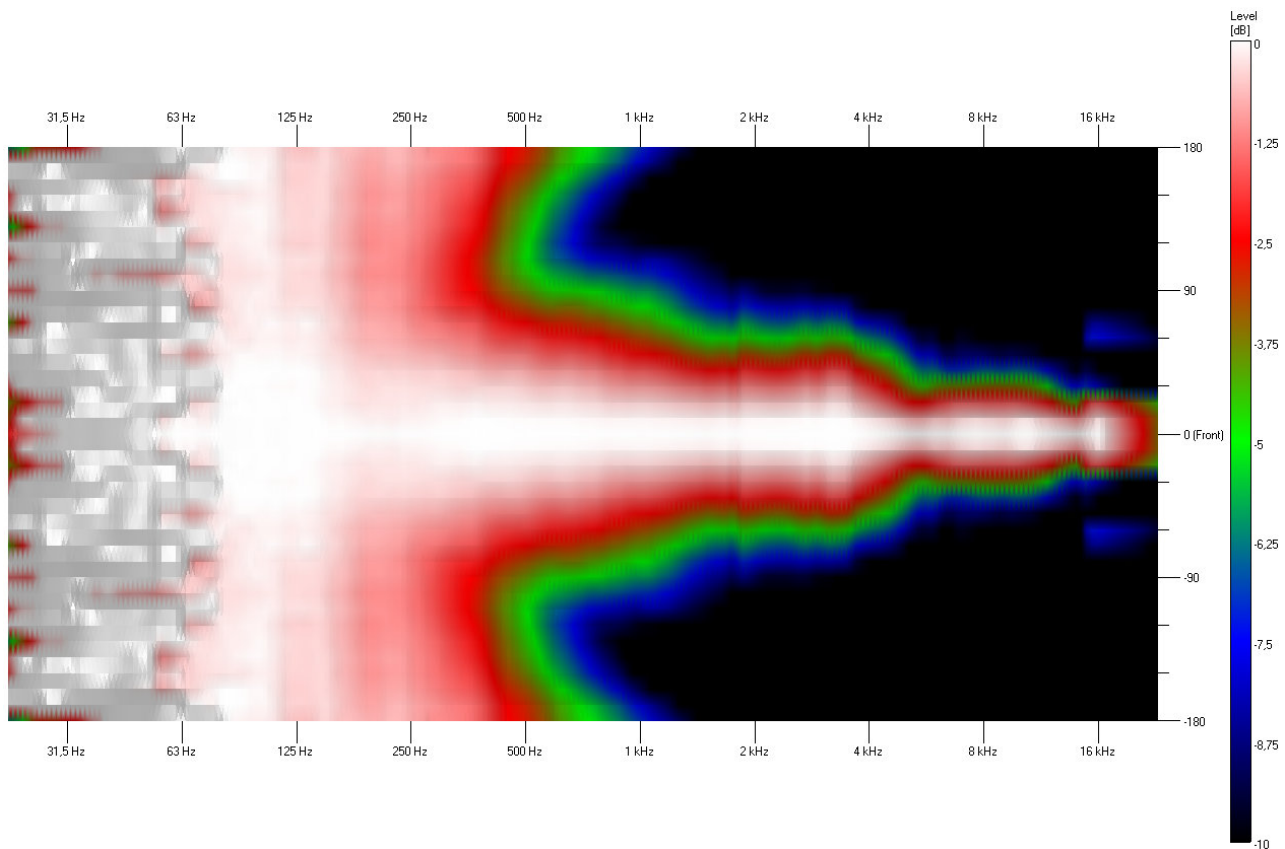



Frequency Response Diagrams

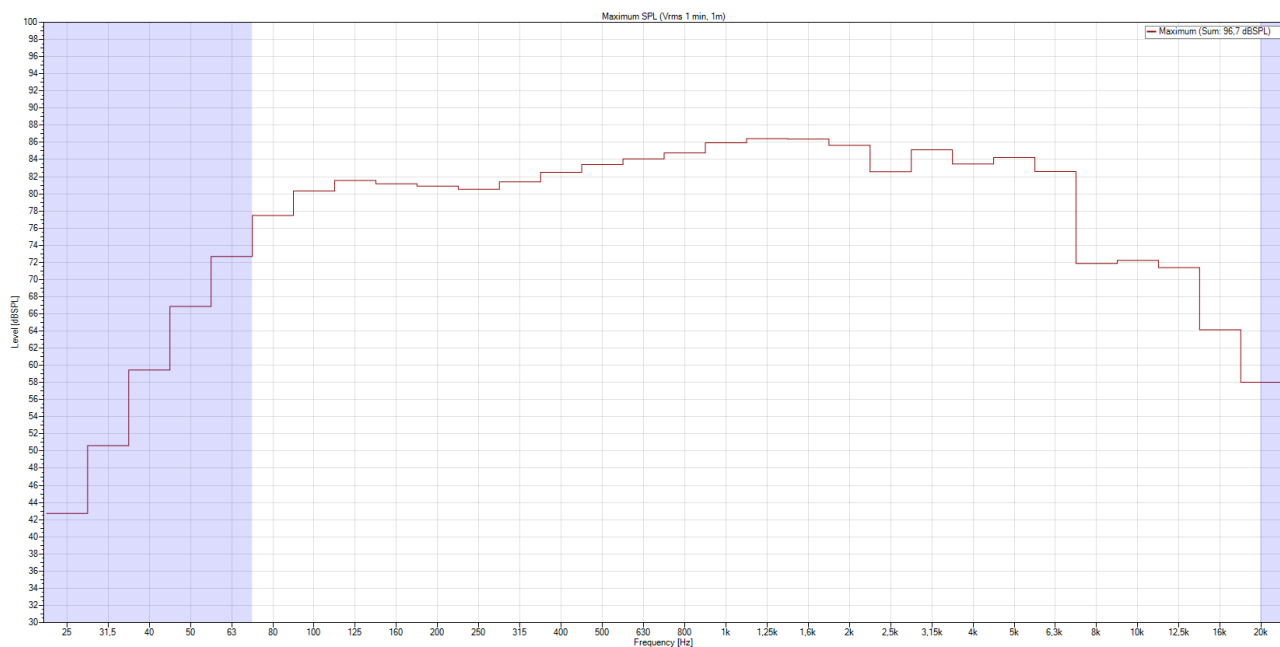


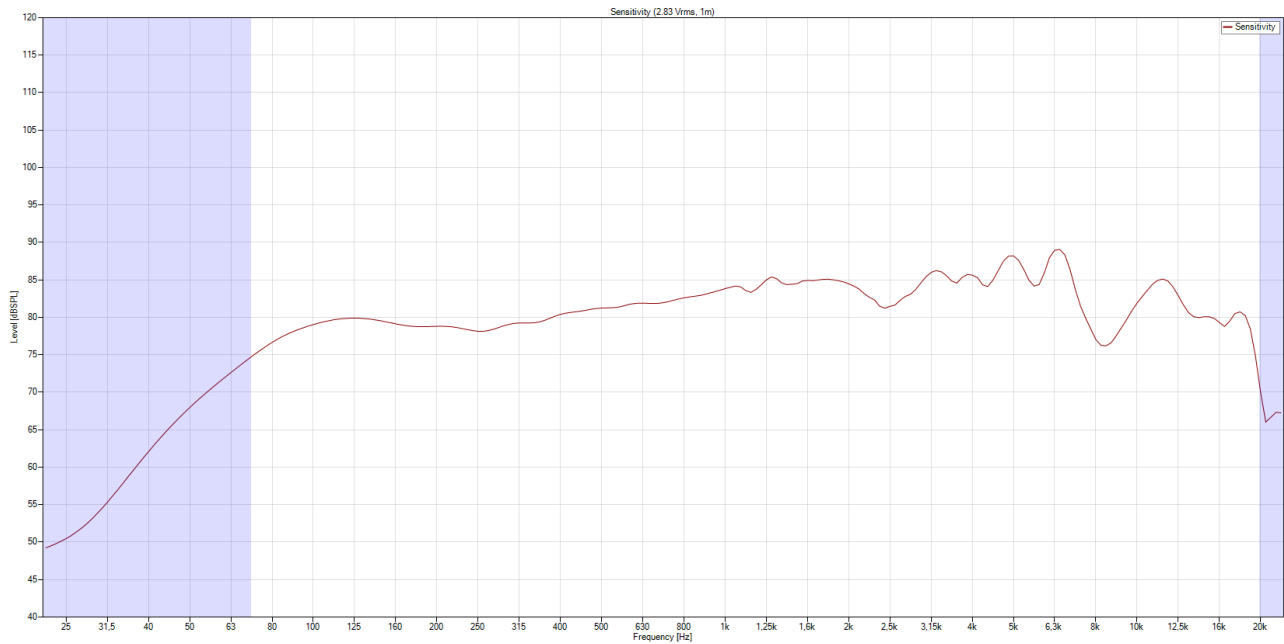


Polar Diagrams

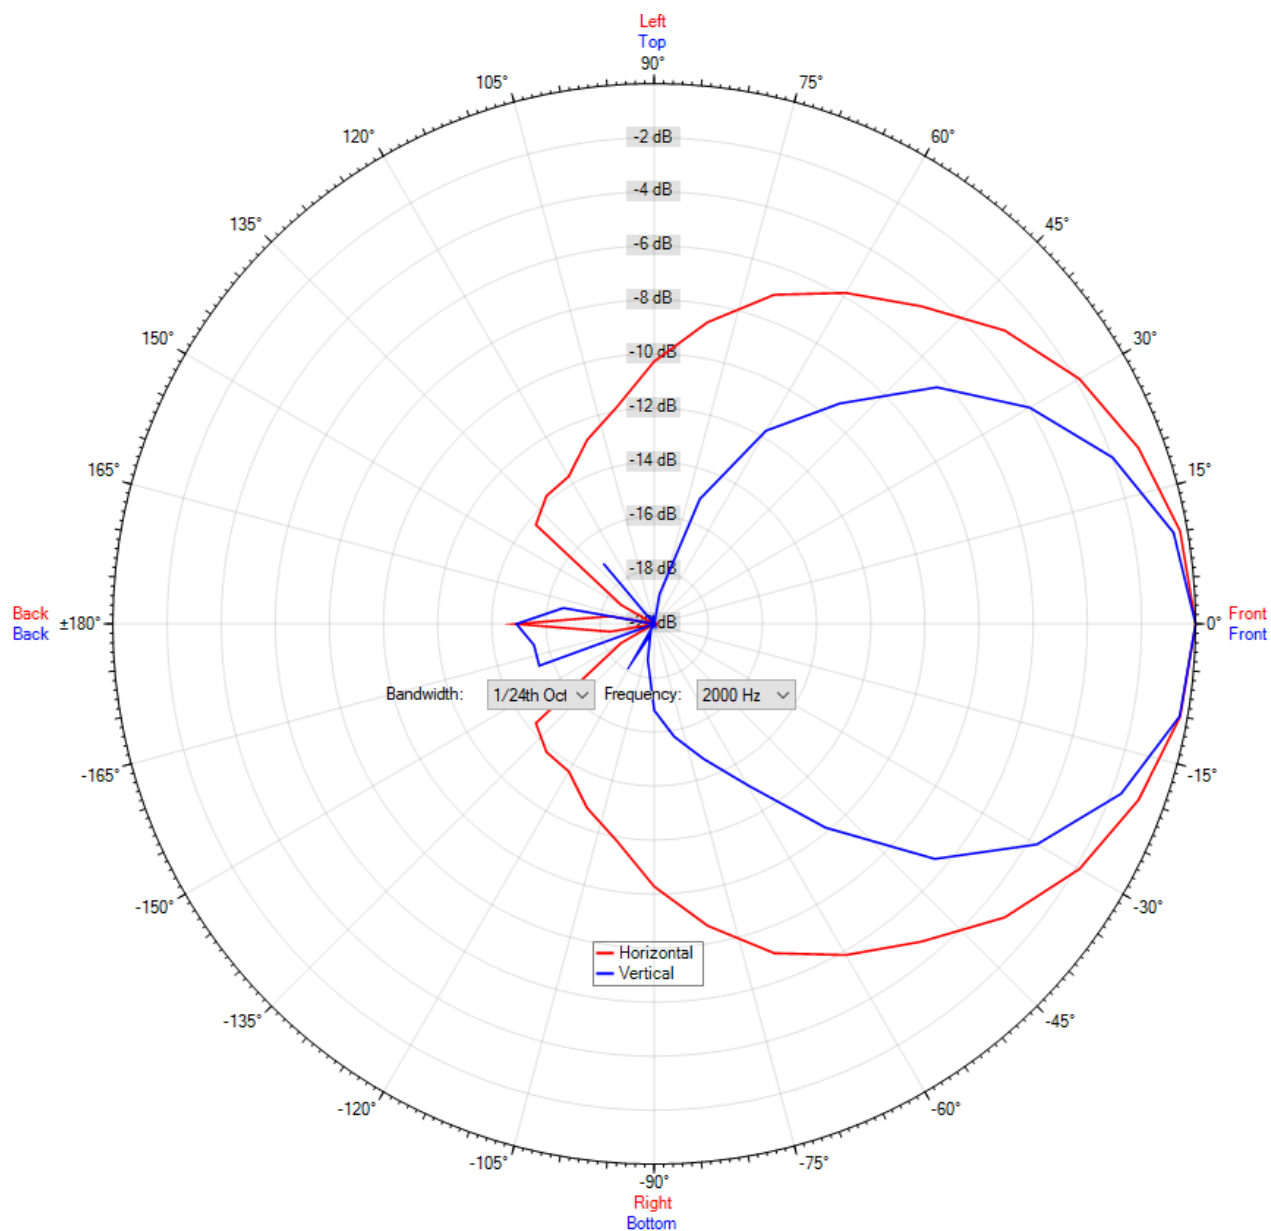

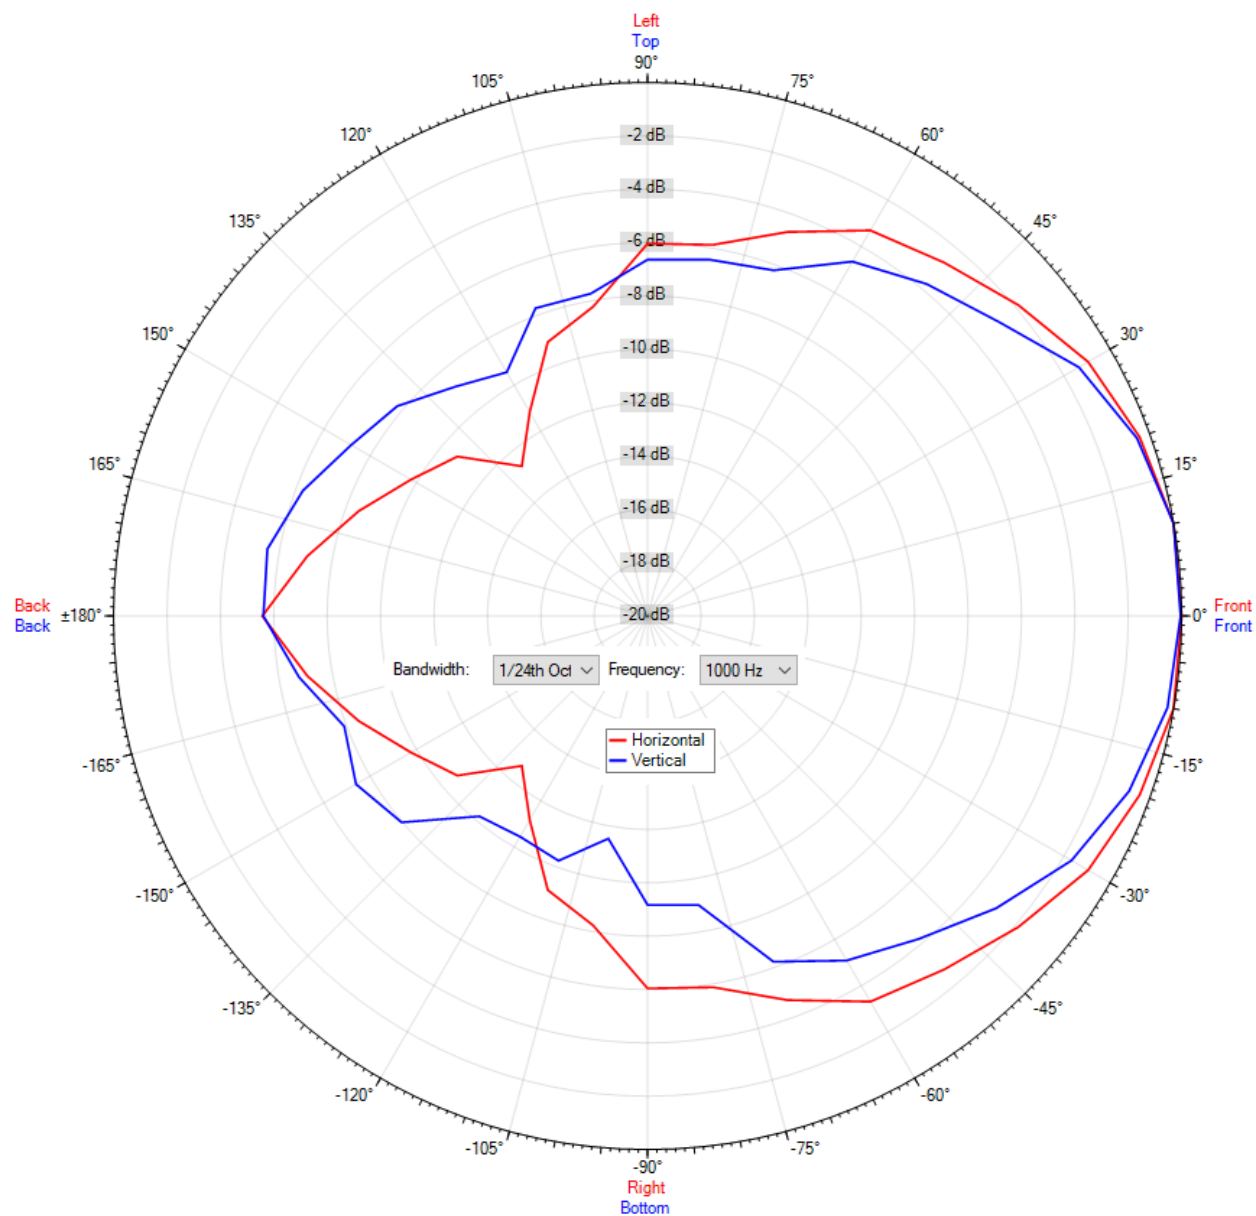

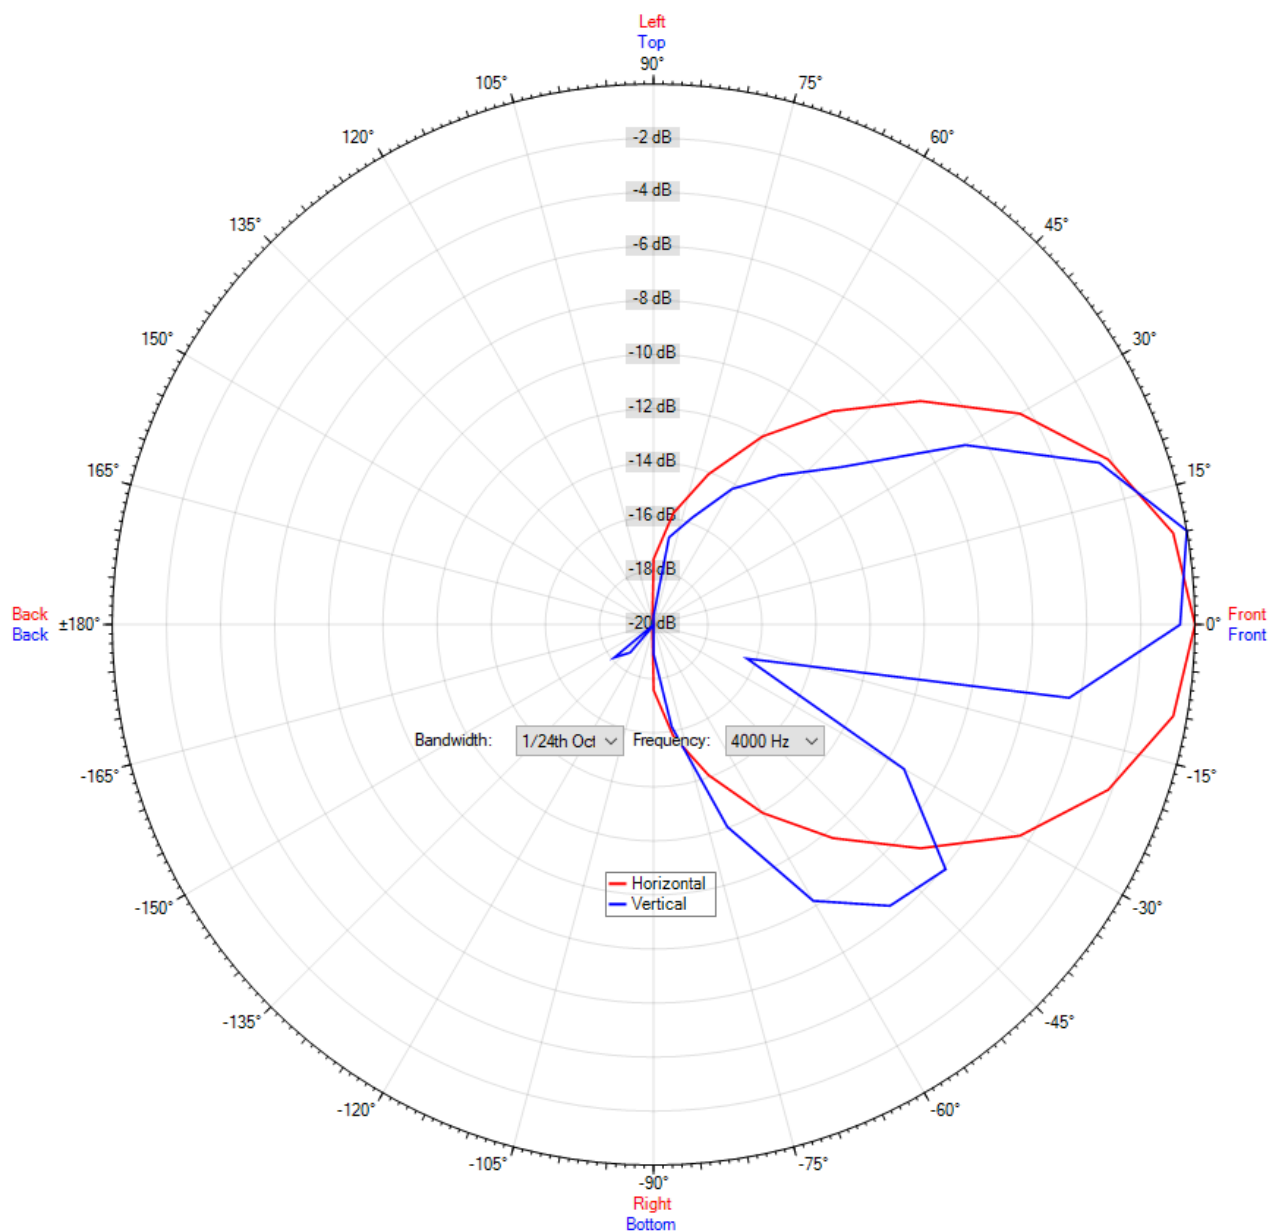

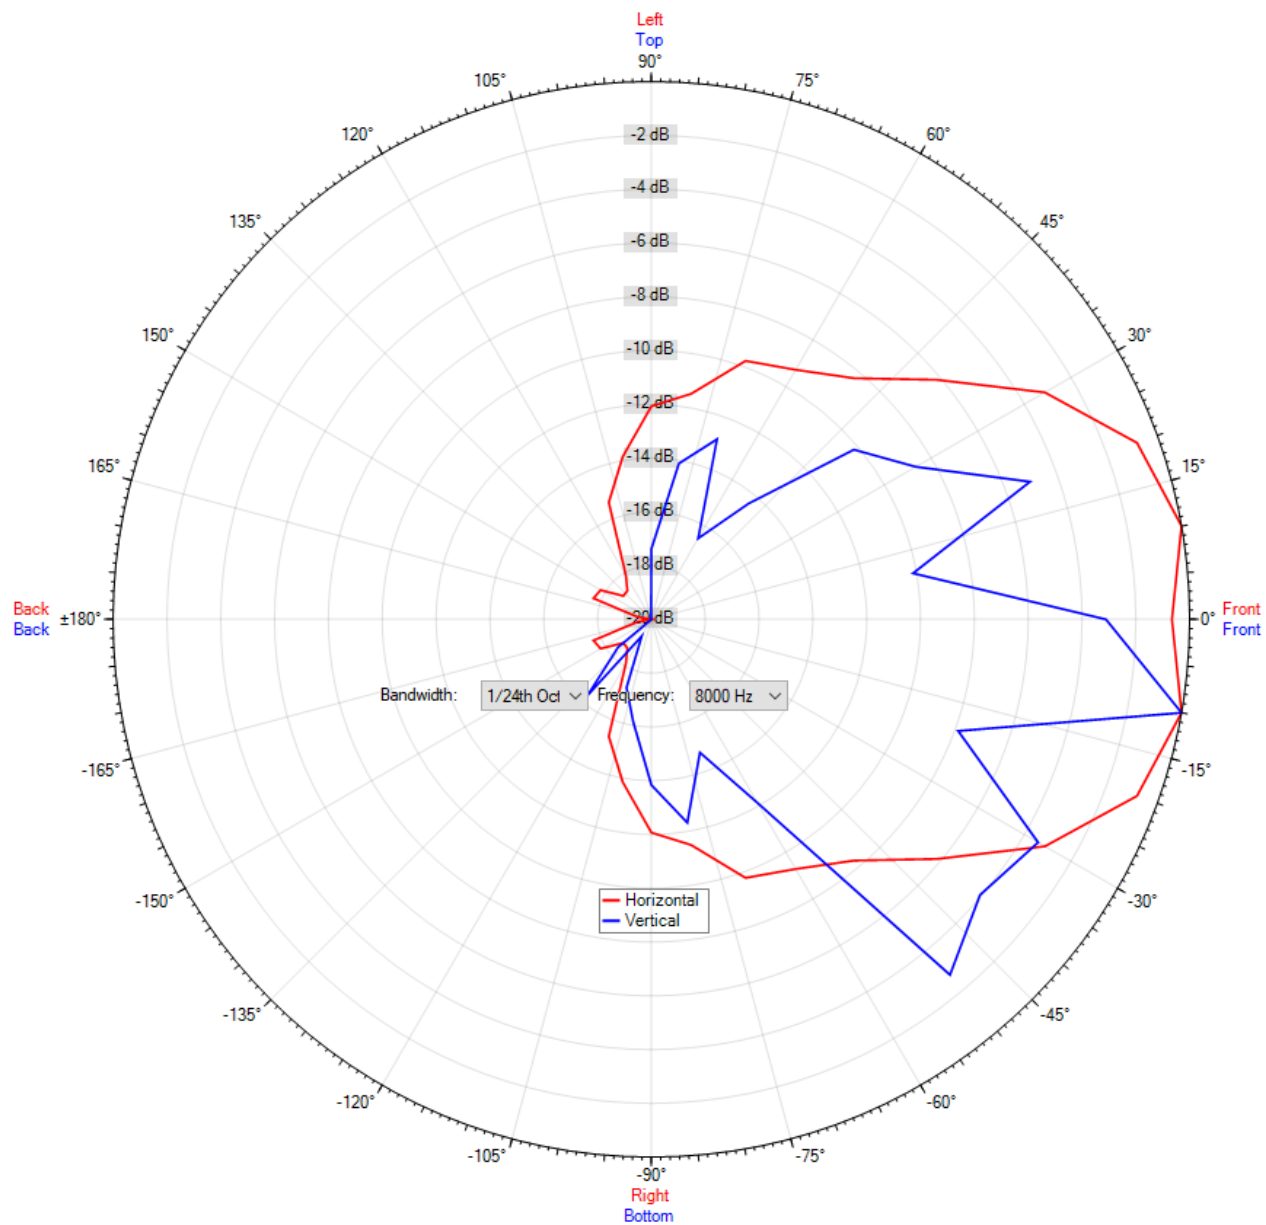

RoHS compliant (2011/65/EU)

Article Nr.: 20122645

Packing Unit: 8

