



DA-S 20-130/T

- very good speech intelligibility
- aluminium housing
- quick mounting

The 20W powered speaker is equipped with a 130mm full-range loudspeaker chassis and a 100V line transformer with 4 power adjustments. A robust powder coated aluminum housing in RAL 9010, and a solid mounting bracket ensures the permanent installation of this speaker.

The speaker is secured with the high protection class IP 65 against the risks of environmental influences. The speaker is connected by a 5-pin connection cable with 1 meter length. Optionally available is a mast bracket (MB) for about 200mm mast diameter.

Perfectly suitable for the installation in corridors and hallways.

Special paint of the speaker in 4-digit RAL- or NCS-colour available at extra cost.

Technical Data


Description	DA-S 20-130/T
Power	20/15/10/5 W
Frequency Range	800 - 16.700 Hz
Frequency Response	150 - 20.000 Hz
SPL 1W/1m, peak	103,2 dB
Sensitivity 1W/1m	99,7 dB
Dispersion (-10dB)	360° (h) / 360° (v)
Temperature range	-20 / +90 °C
Dimensions	167x163 mm
Weight (net)	2,35 kg
Colour	RAL 9010
Connector	5-pin cable
Mounting	Mounting bracket
Packing Unit	8
Accessories	MB 200
IP Rating	IP65

Product Attributes




Polar Diagrams


Copyright by Four-Audio GmbH & Co KG Licensed to AAC

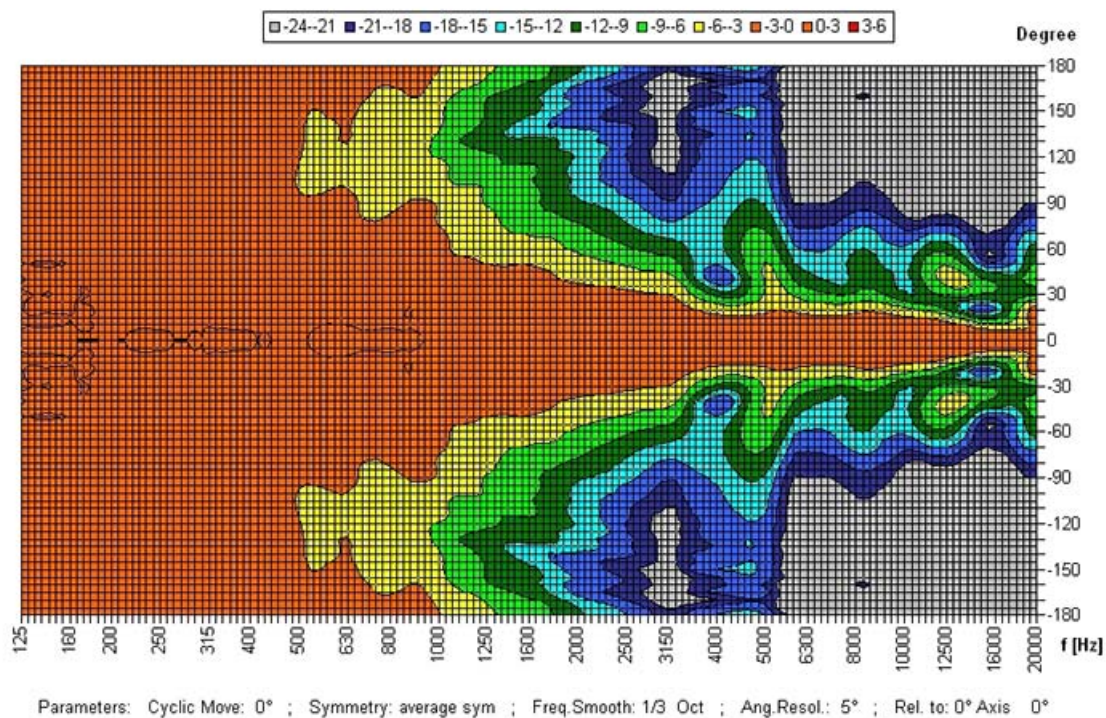

Frequency Response Diagrams

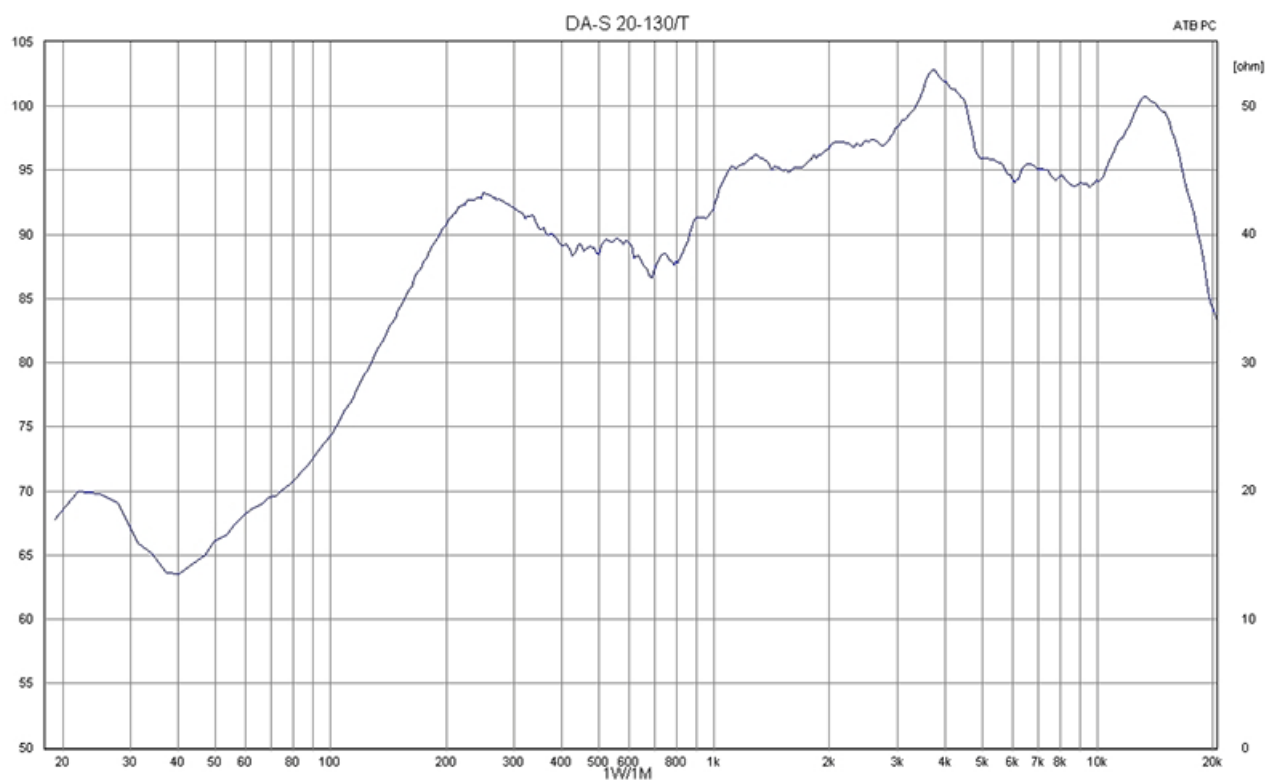

Technical Diagrams

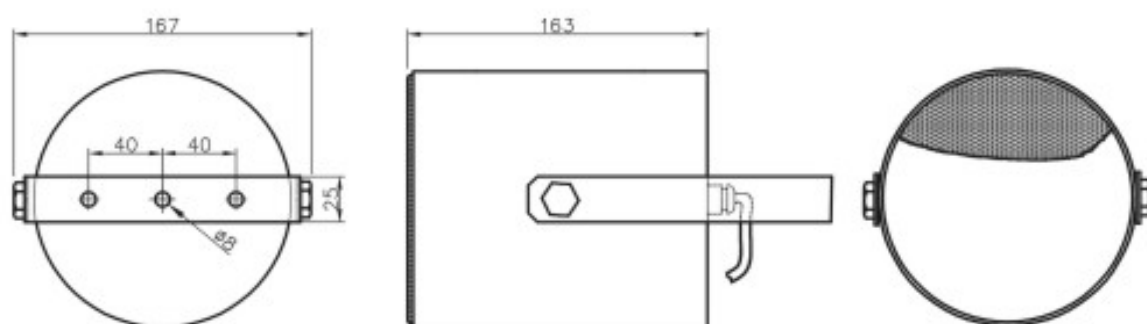

RoHS compliant (2011/65/EU)



Article Nr.:

61416020

Packing Unit:

8

