




WA-BW 06-165/T

- Softline-design
- shock-resistant housing
- ballproof



The 6W powered speaker is equipped with a 165mm full-range loudspeaker chassis and a 100V transformer with 3 power adjustments. The high-density, shock-resistant MDF wood housing in white provides a low resonance sound. A sturdy front grille made of steel guarantees enduring stability.

The speaker is secured with the high protection class IP 54 against the security risks of environmental influences. Quick and easy mounting with screws.

The speaker is connected by a 2-pin push-clamp.

Excellent qualified for the installation in sports facilities and schools.



Technical Data

Description	WA-BW 06-165/T
Power	6/3/1,5 W
Frequency Range	197 - 21.900 Hz
Frequency Response	175 - 23.500 Hz
SPL 1W/1m, peak	100,6 dB
SPL Pmax/1m, peak	108,4 dB
Sensitivity 1W/1m	98,6 dB
Dispersion (-10dB)	180° (h) / 96° (v)
Temperature range	-20 / +80 °C
Dimensions	254x195x81 mm
Weight (net)	1,84 kg
Colour	white
Connector	2-pin push clamp
Mounting	Screws
Packing Unit	8
IP Rating	IP54


Product Attributes




Polar Diagrams

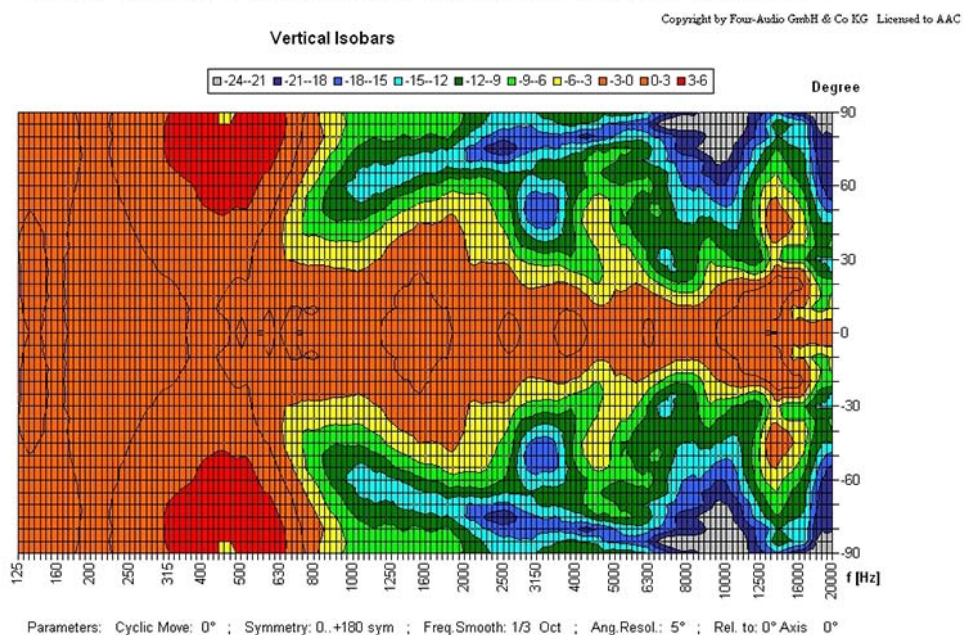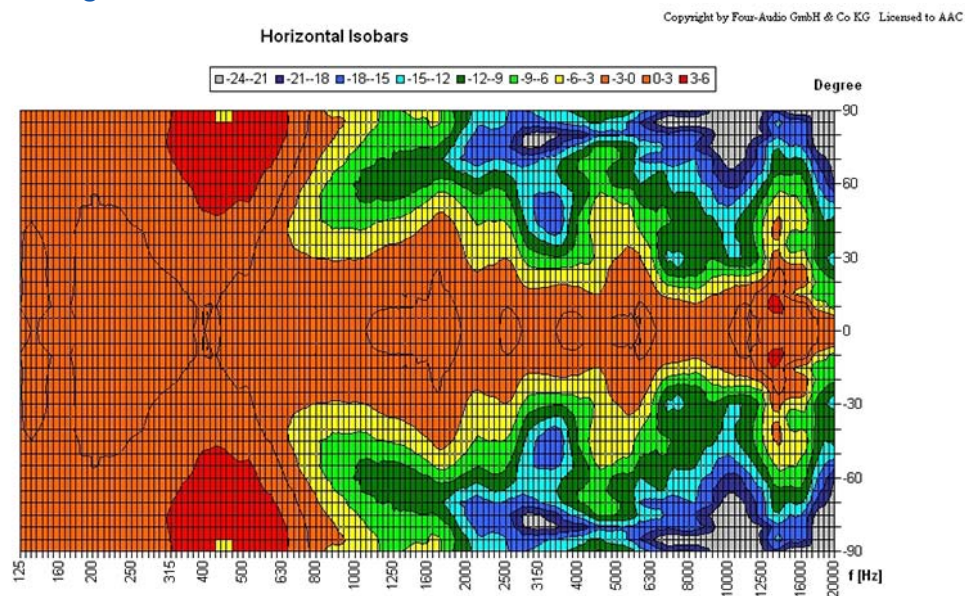

Frequency Response Diagrams

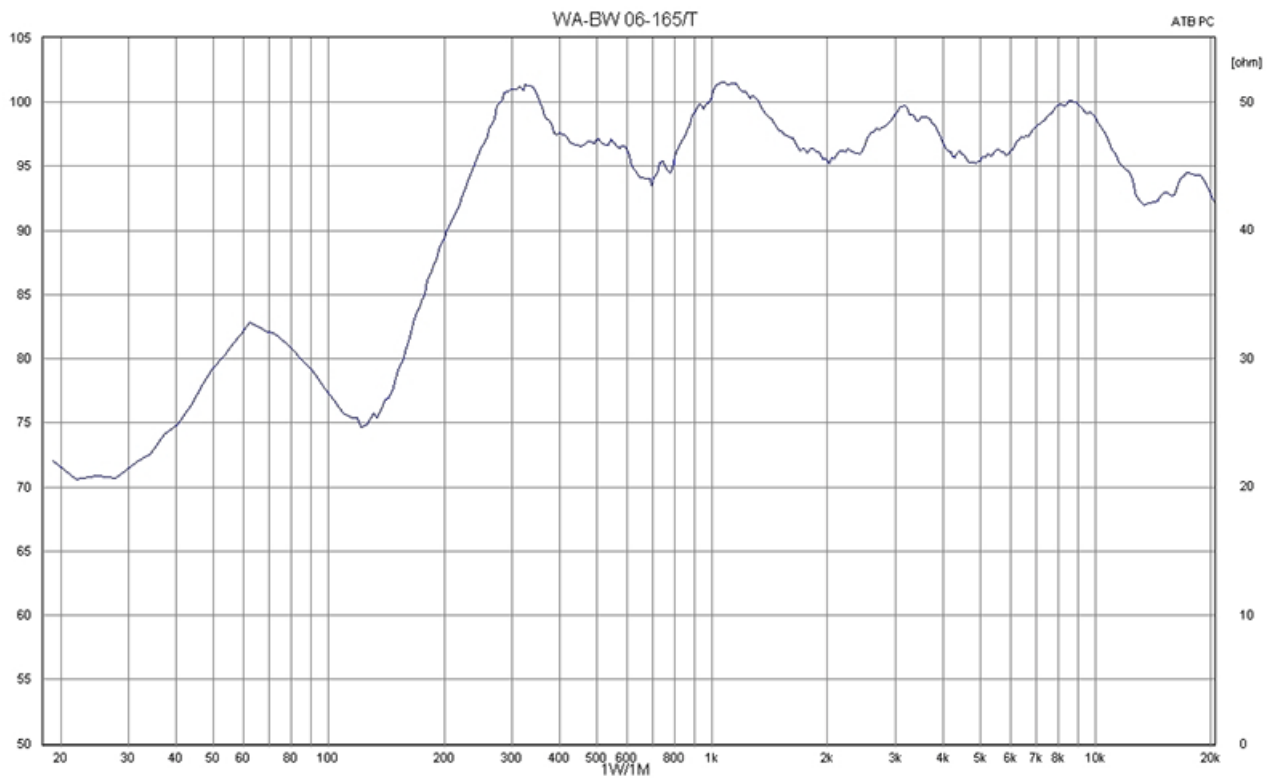

Technical Diagrams

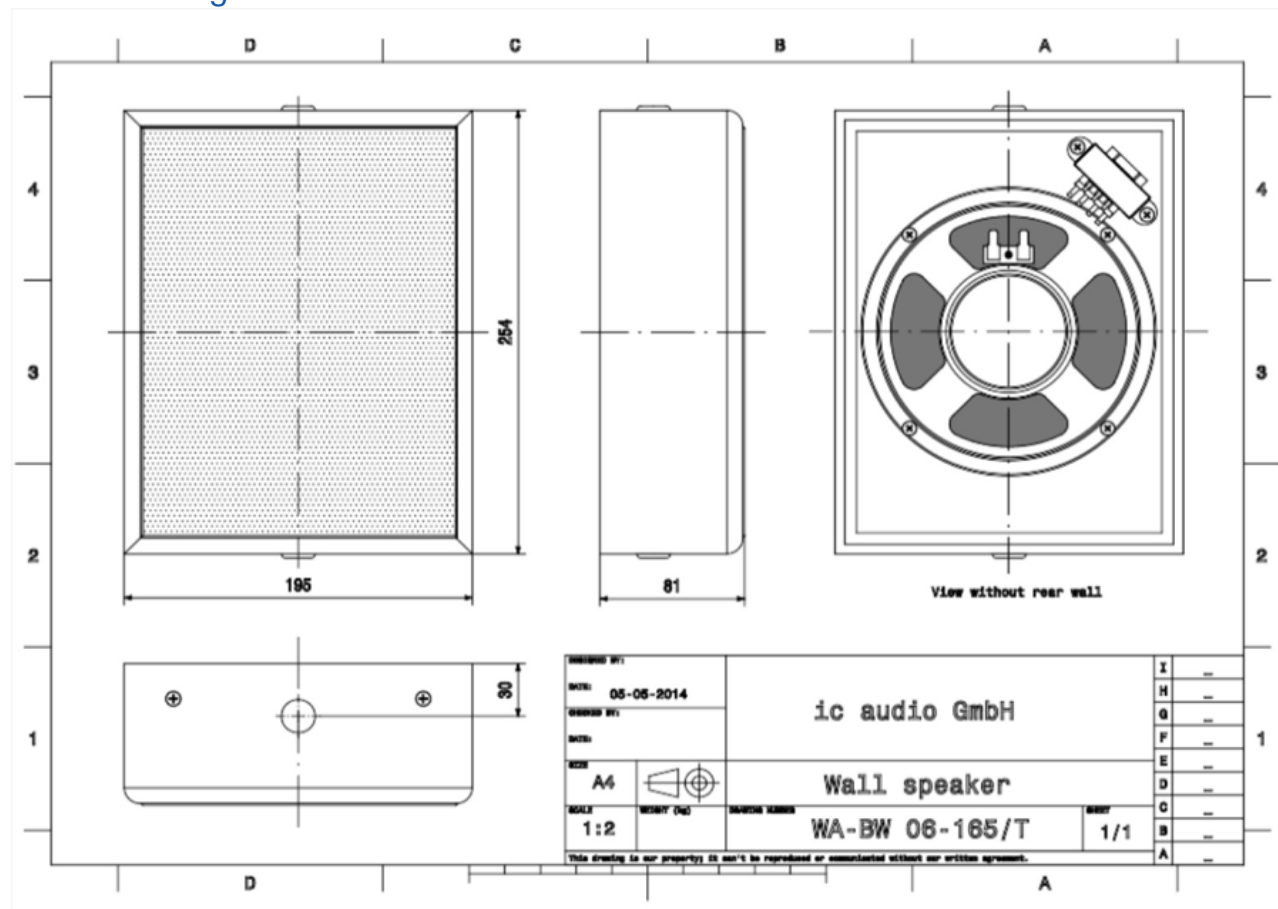

RoHS compliant (2011/65/EU)



Article Nr.:
44624834

Packing Unit:
8

