



DK-MH 30/T plus

- superb sound quality
- weather proof
- balanced frequency range

The 30W powered 2-way speaker is equipped with a 100V line transformer with 4 power adjustments. The impact-resistant ABS housing in RAL 7035 guarantees long-term stability.

The speaker is secured with the high protection class IP 66 against the security risks of environmental influences. Mounting by stainless aluminum universal mount. The speaker is connected by a sturdy 6-pin screw terminal.

Optionally available is a mast bracket (MB) for about 200mm mast diameter.



Technical Data

Description	DK-MH 30/T plus
Power	30/15/7,5/3,75 W
Frequency Range	237 - 21.100 Hz
Frequency Response	65 - 24.000 Hz
SPL 1W/1m, peak	101,8 dB
SPL Pmax/1m, peak	116,6 dB
Sensitivity 1W/1m	100,1 dB
Dispersion (-10dB)	130° (h) / 80° (v)
Temperature range	-20 / +90 °C
Dimensions	370x255x291 mm
Weight (net)	4,50 kg
Colour	RAL 7035
Connector	6-pin screw terminal
Mounting	Universal bracket
Packing Unit	4
IP Rating	IP66


Product Attributes




Polar Diagrams

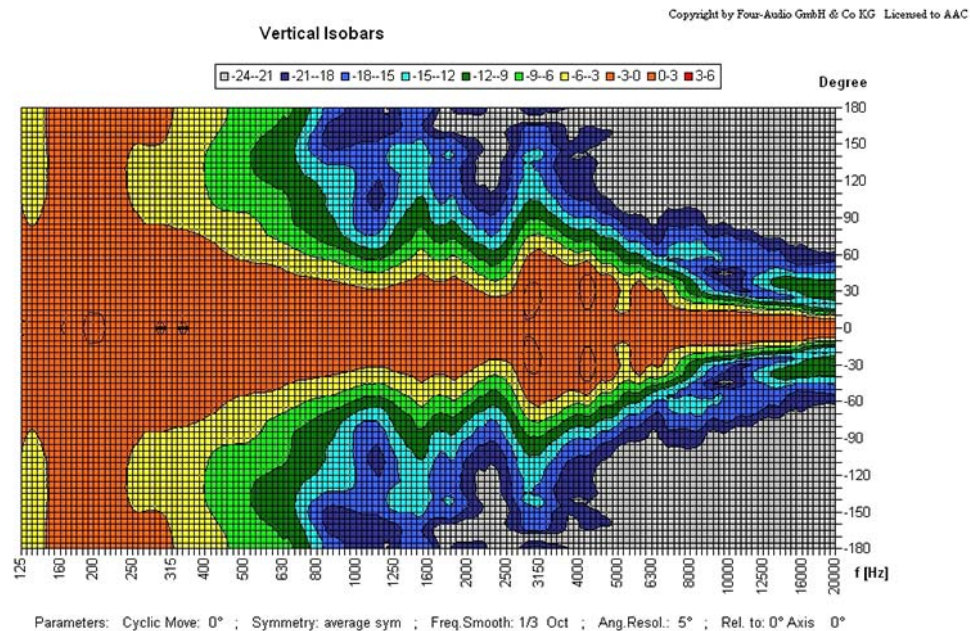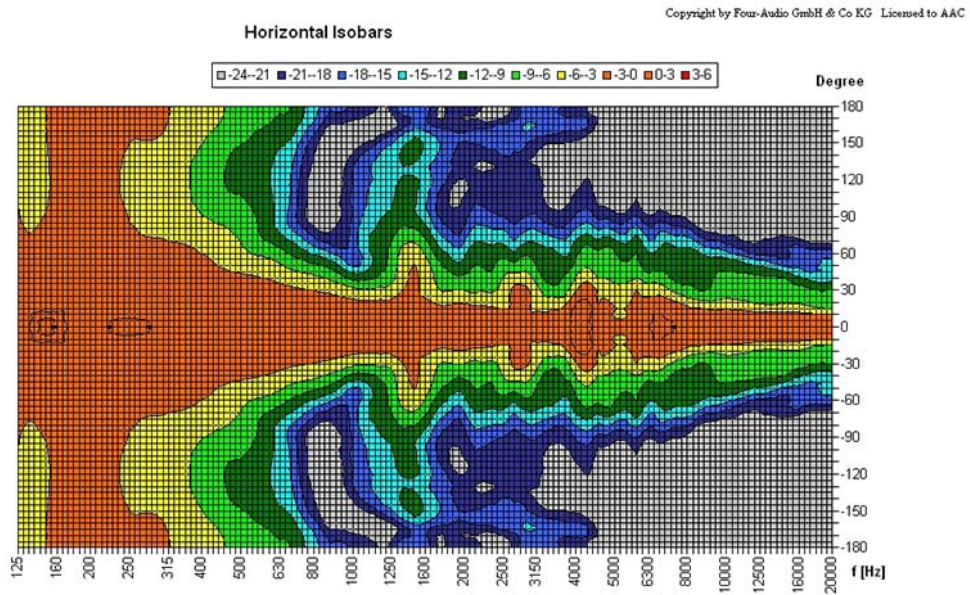

Frequency Response Diagrams

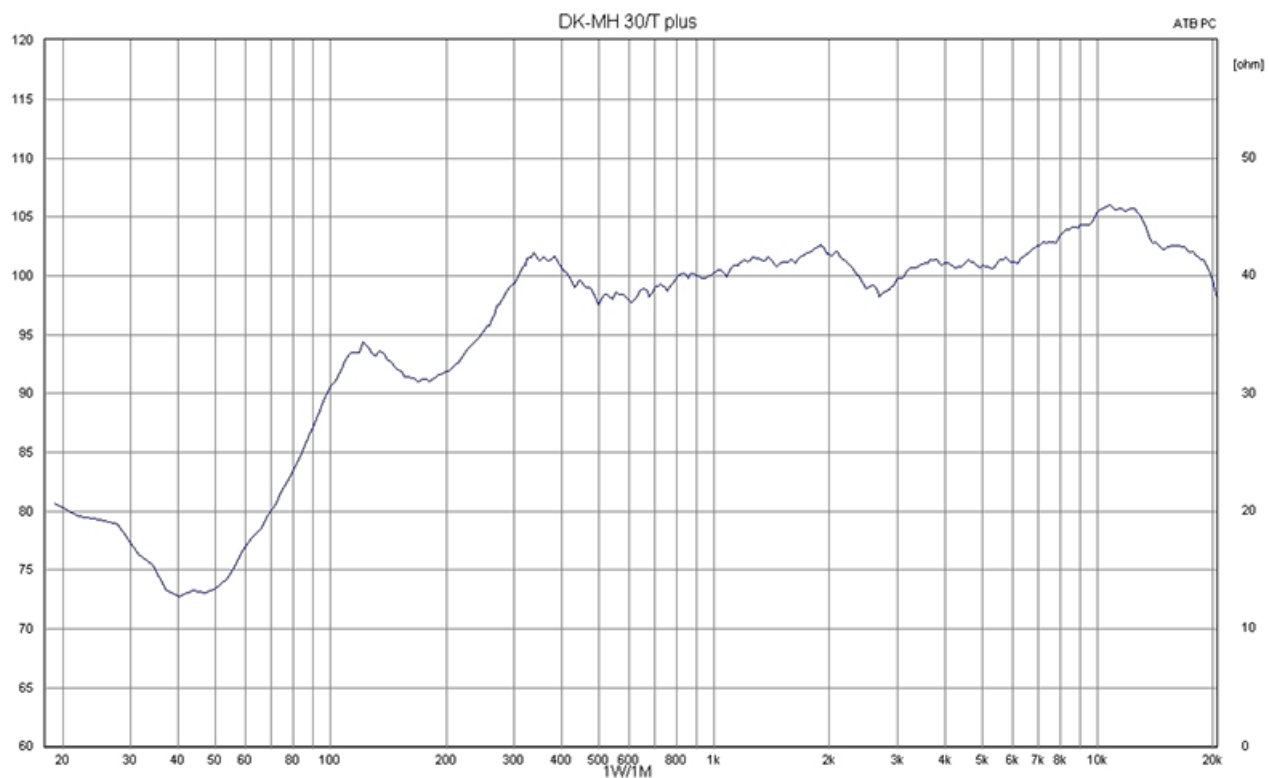

Technical Diagrams

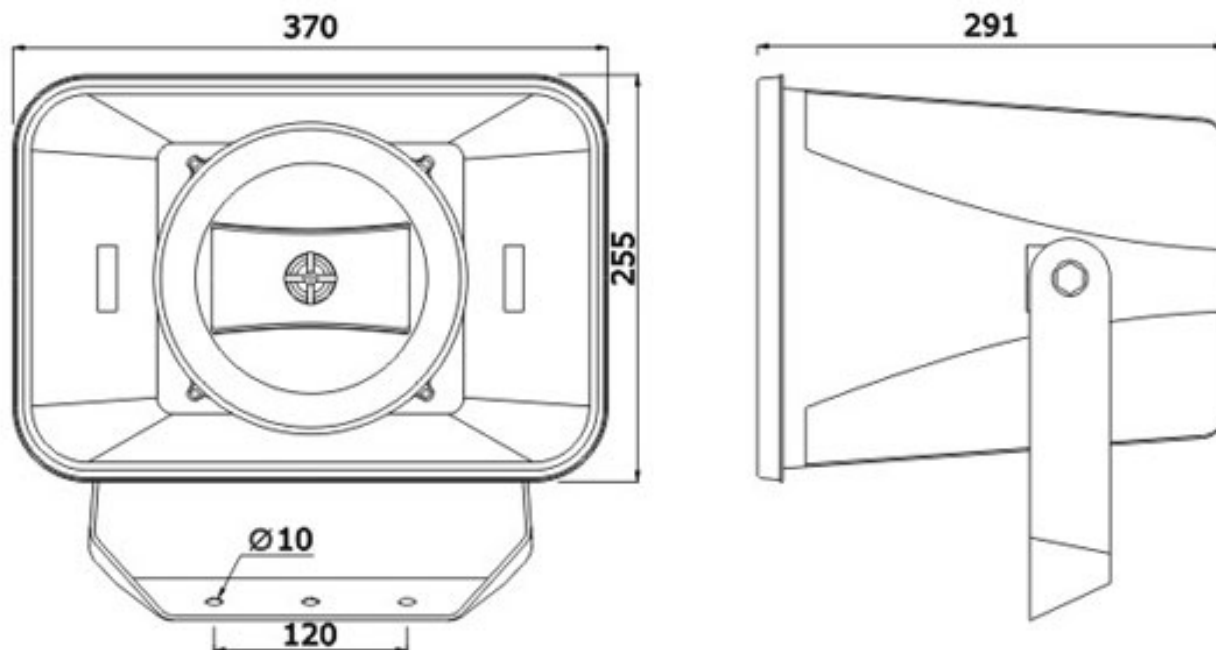

RoHS compliant (2011/65/EU)



Article Nr.:
800125107

Packing Unit:
4

