



DL 06-66/T

- quick mounting
- UV-resistant
- discreet appearance



Harmonious design in combination with halogen recessed spotlights. The 6W powered speaker is equipped with a 66mm full-range loudspeaker and a 100V transformer with 3 power adjustments. The impact-resistant ABS housing in white guarantees long-term stability.

Quick and easy mounting with spring clamps and short tension distance.

The speaker is connected by a sturdy 4-pin screw terminal.

This speaker is suitable for a ceiling strength of about 4 – 40 mm. Our specification is primarily related to solid ceilings, for ceilings with soft materials a higher ceiling thicknesses could be necessary. In addition, stronger cables and other fittings may also result in changes of the appropriate setup. With regard to the variety of materials and manufacturers, we recommend to build in a sample of the speaker to match the requirements accurately.

Technical Data

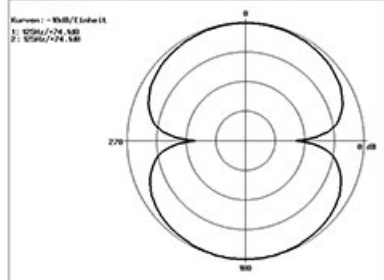
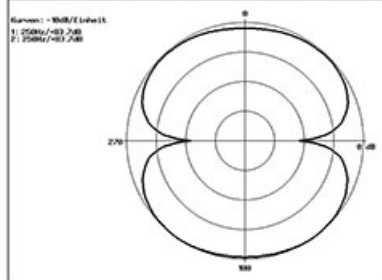
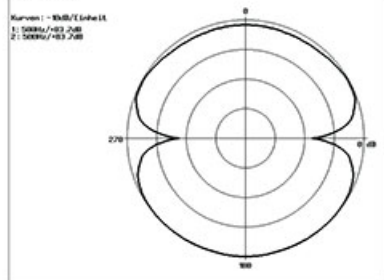
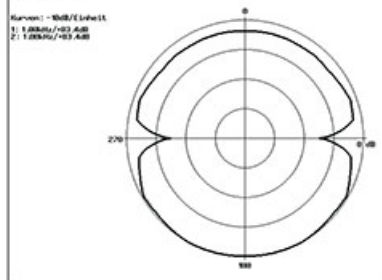
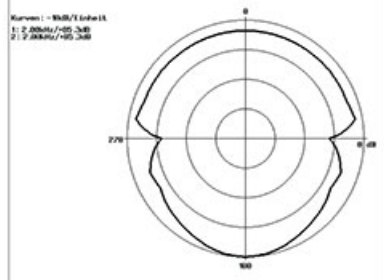
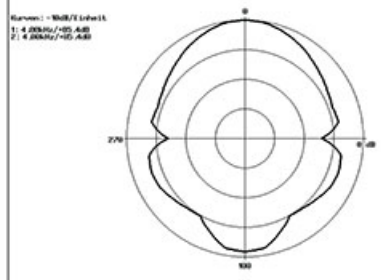
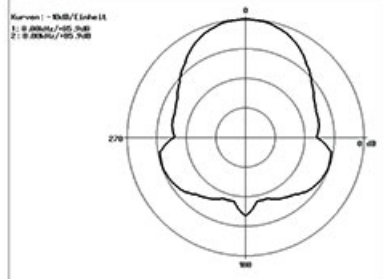
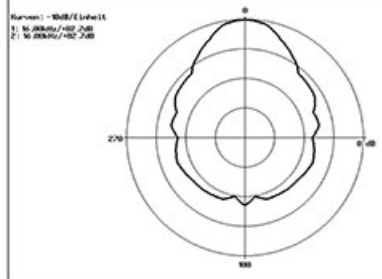
Description	DL 06-66/T
Power	6/3/1,5 W
Frequency Range	100 - 21.000 Hz
Frequency Response	81 - 24.000 Hz
SPL 1W/1m, peak	89,8 dB
SPL Pmax/1m, peak	97,6 dB
Sensitivity 1W/1m	84,9 dB
Dispersion (-10dB)	175° (h) / 175° (v)
Temperature range	-20 / +80 °C
Dimensions	104x79 mm
Weight (net)	0,55 kg
Colour	white
Connector	4-pin screw terminal
Mounting	Quick fit mounting
Packing Unit	24
Ceiling Cut-out	92 mm

Please note: Because of many different types of ceiling materials and ceiling strengths we recommend to build in a sample of the speaker to match the requirements accurately.

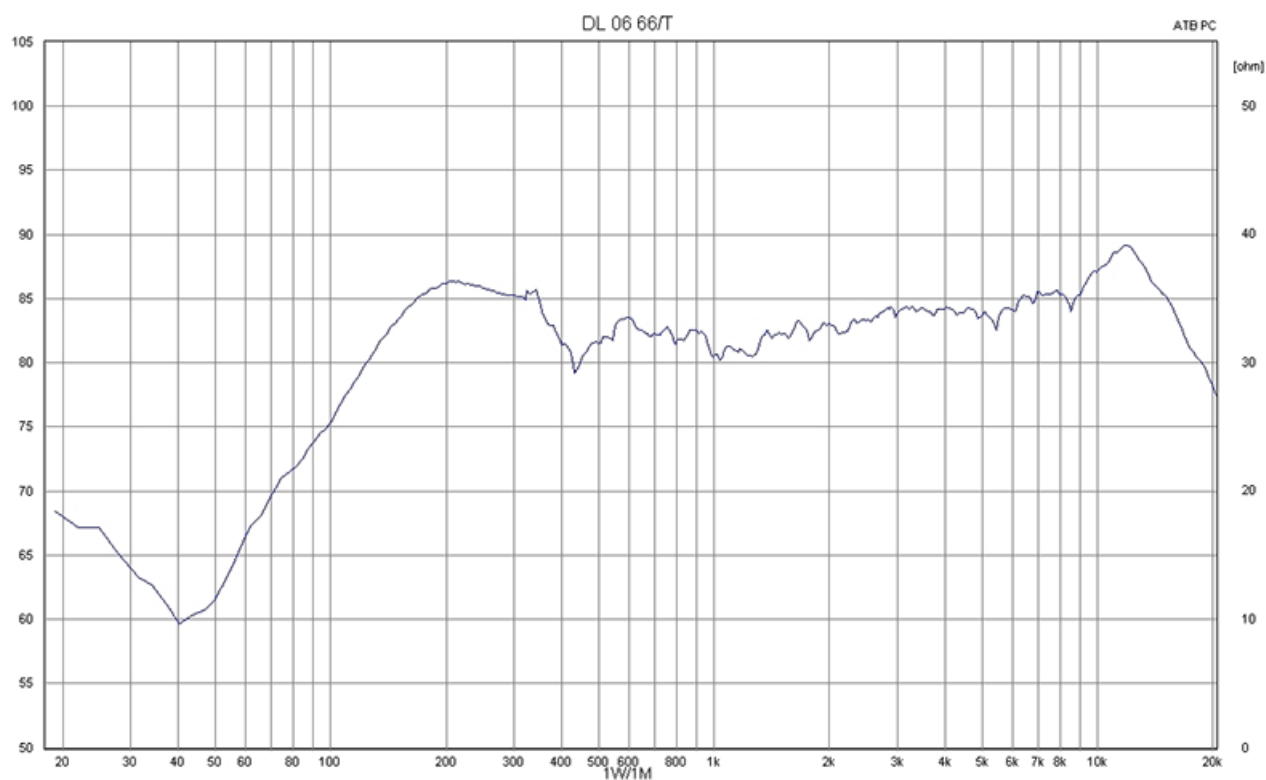
Product Attributes



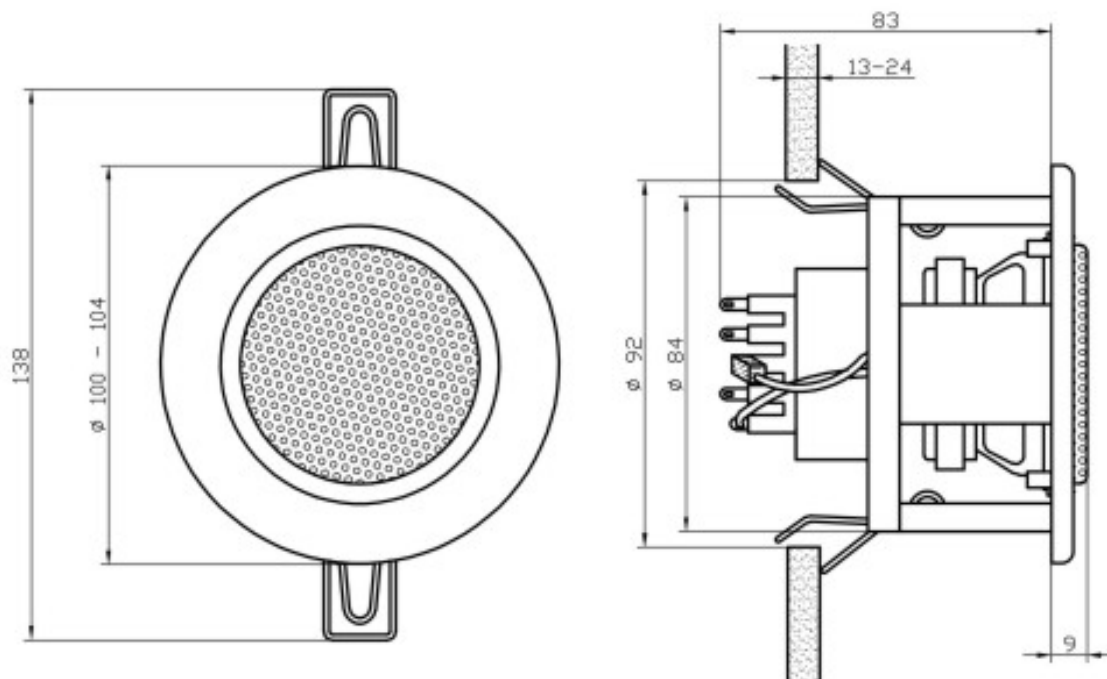
Polar Diagrams

125 Hz

250 Hz

500 Hz

1000 Hz

2000 Hz

4000 Hz

8000 Hz

16000 Hz


Frequency Response Diagrams



Technical Diagrams



RoHS compliant (2011/65/EU)



Article Nr.:
51277001

Packing Unit:
24

