



DL-P 06-165/T

- quick mounting
- UV-resistant
- high impact ABS plastic



The 6W powered speaker is equipped with a 165mm full-range loudspeaker and a 100V transformer with 3 power adjustments. The impact-resistant ABS housing (UL 94-HB) in RAL 9010 guarantees long-term stability. Quick and easy mounting with spring clamps and short tension distance.

The speaker is protected by the high protection class IP 44 against the risks of environmental influences.

The speaker is connected by a 2-pin push-clamp.

This speaker is suitable for a ceiling strength of about 2 – 47 mm. Our specification is primarily related to solid ceilings, for ceilings with soft materials a higher ceiling thicknesses could be necessary. In addition, stronger cables and other fittings may also result in changes of the appropriate setup. With regard to the variety of materials and manufacturers, we recommend to build in a sample of the speaker to match the requirements accurately.

Technical Data

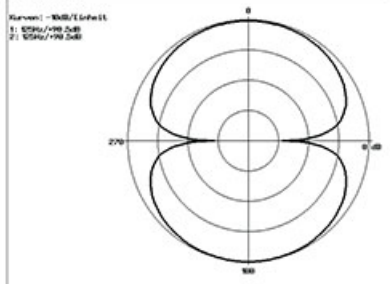
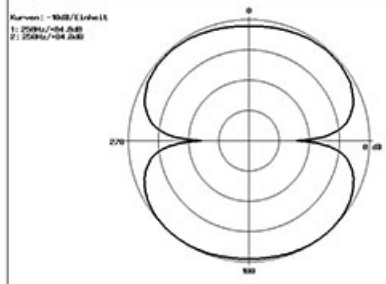
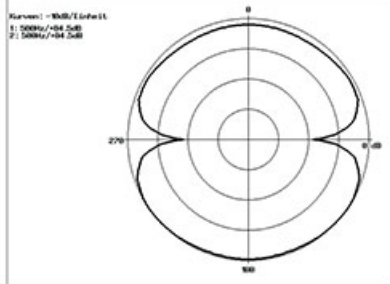
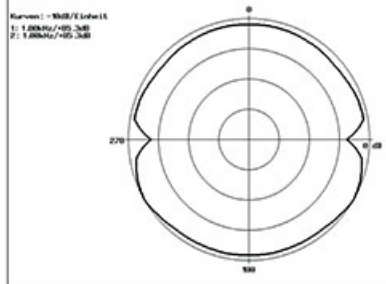
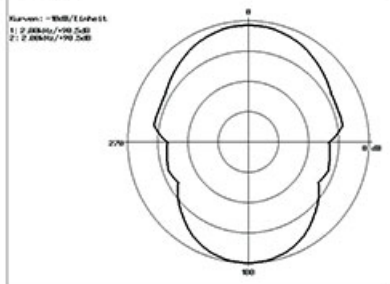
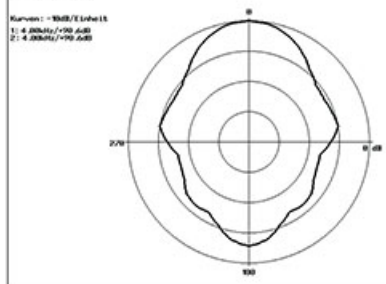
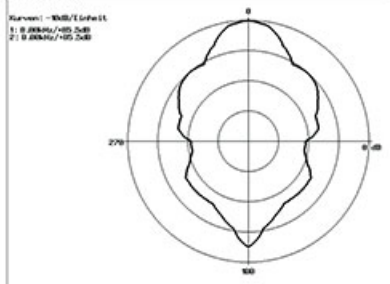
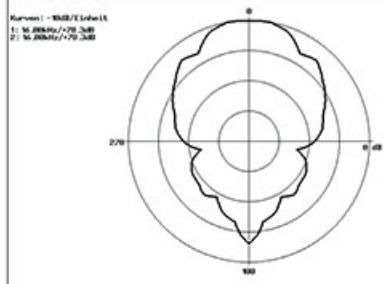
Description	DL-P 06-165/T
Power	6/3/1,5 W
Frequency Range	84 - 22.500 Hz
Frequency Response	70 - 23.500 Hz
SPL 1W/1m, peak	100,2 dB
SPL Pmax/1m, peak	108 dB
Sensitivity 1W/1m	98,6 dB
Dispersion (-10dB)	180° (h) / 180° (v)
Temperature range	-20 / +80 °C
Dimensions	210x73 mm
Weight (net)	0,80 kg
Colour	RAL 9010
Connector	2-pin push clamp
Mounting	spring clamp
Packing Unit	12
Ceiling Cut-out	192 mm
IP Rating	IP44

Please note: Because of many different types of ceiling materials and ceiling strengths we recommend to build in a sample of the speaker to match the requirements accurately.

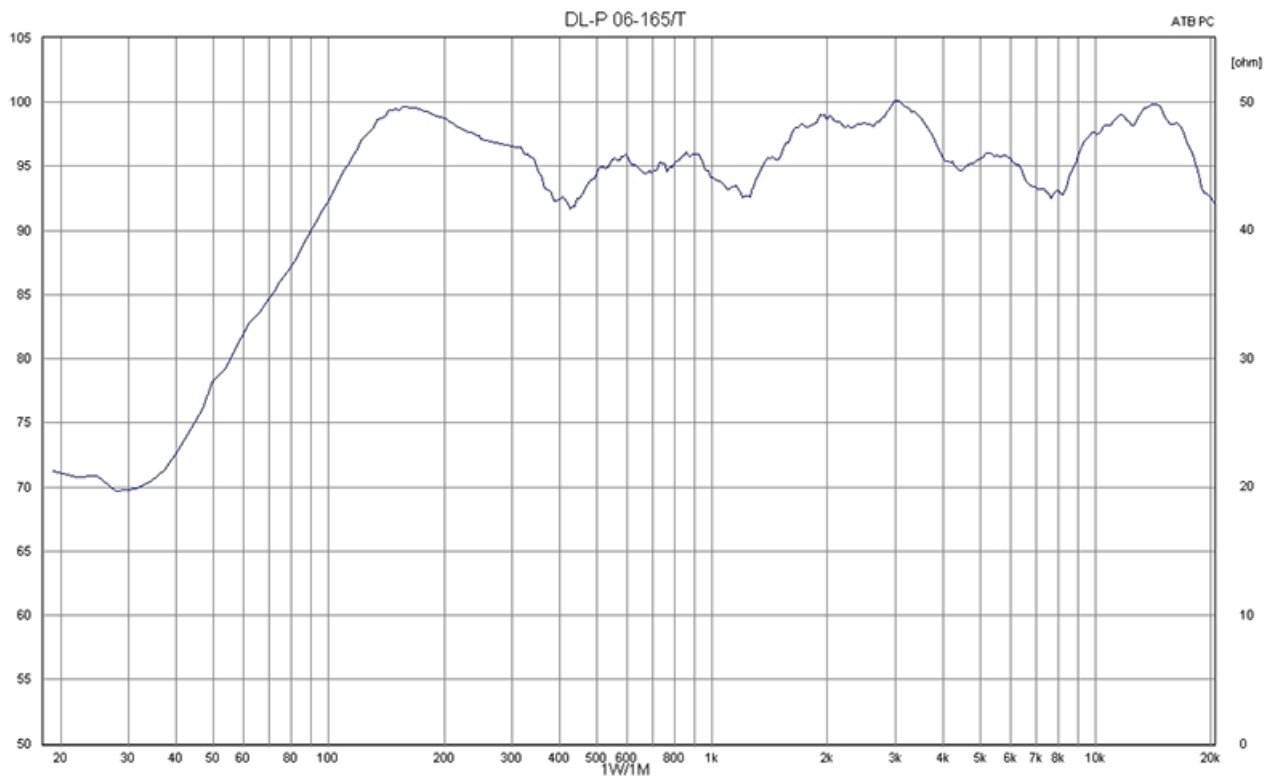
Product Attributes



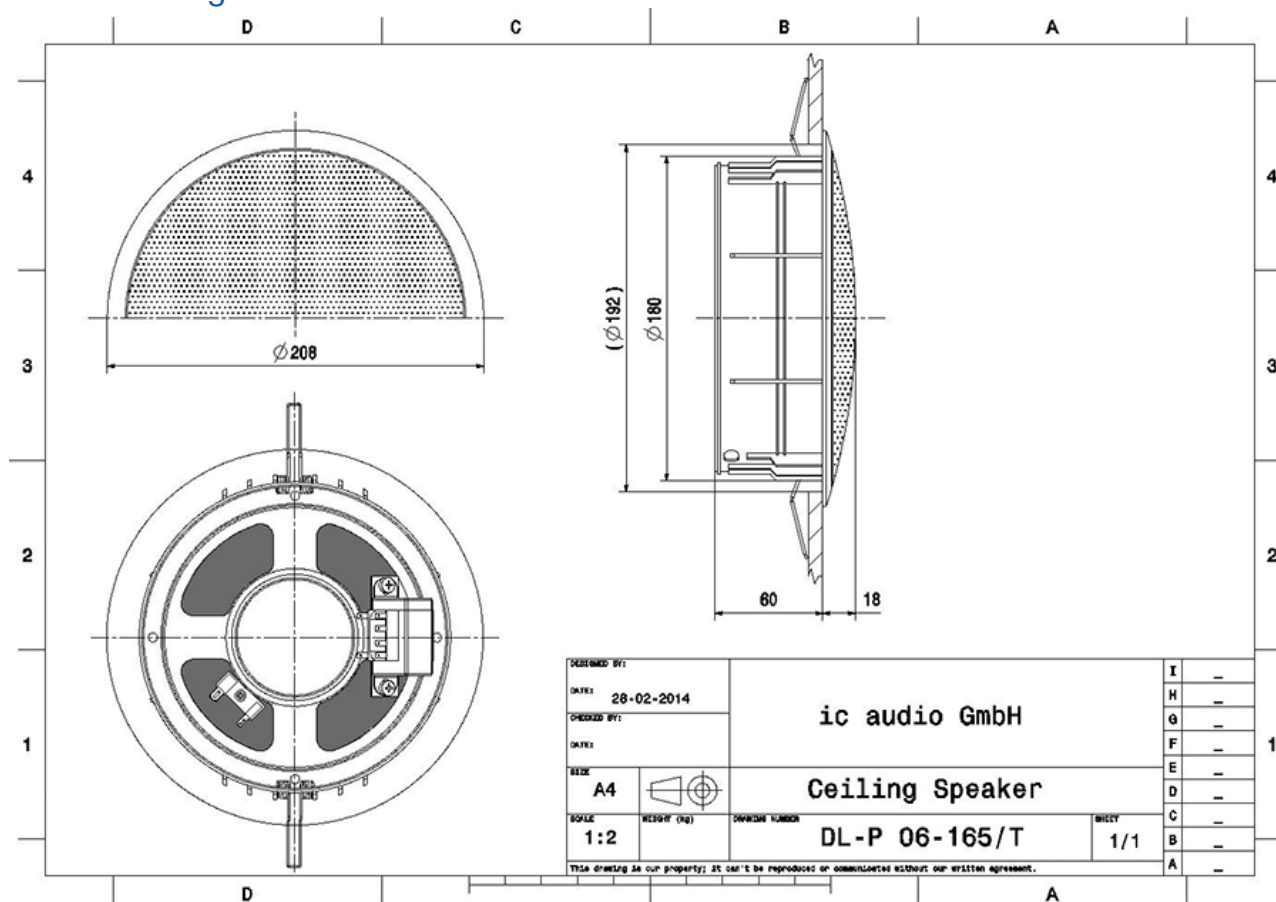
Polar Diagrams

125 Hz

250 Hz

500 Hz

1000 Hz

2000 Hz

4000 Hz

8000 Hz

16000 Hz


Frequency Response Diagrams



Technical Diagrams



RoHS compliant (2011/65/EU)



Article Nr.:
10222025

Packing Unit:
12

