


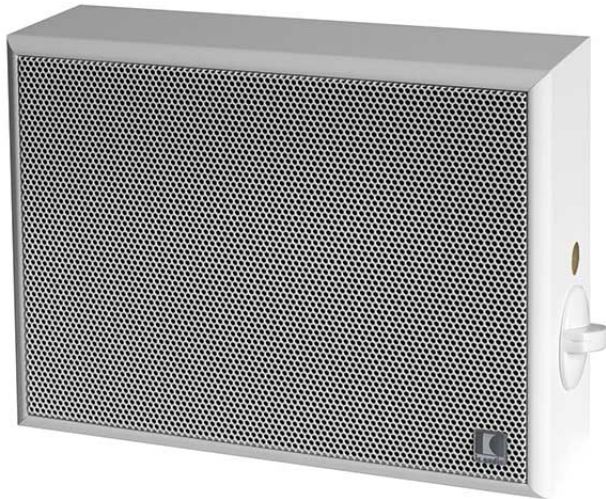

WA-LR 06-165/T

- Softline-design
- shock-resistant housing
- low-distortion sound

The 6W powered speaker with volume control is equipped with a 165mm full-range loudspeaker chassis and a 100V transformer with 3 power adjustments. The high-density, shock-resistant MDF wood housing in white provides a low resonance sound. A sturdy front grille made of steel guarantees enduring stability.

The speaker is also with the high protection class IP 54 against the security risks of environmental influences. The reliable spring clamp on the rear plate ensures a quick mounting on walls.

The speaker is connected by a 2-pin push-clamp.



Technical Data

Description	WA-LR 06-165/T
Power	6/3/1,5 W
Frequency Range	197 - 21.900 Hz
Frequency Response	175 - 23.500 Hz
SPL 1W/1m, peak	100,6 dB
SPL Pmax/1m, peak	108,4 dB
Sensitivity 1W/1m	98,6 dB
Dispersion (-10dB)	180° (h) / 96° (v)
Temperature range	-20 / +80 °C
Dimensions	267x195x81 mm
Weight (net)	1,80 kg
Colour	white
Connector	2-pin push clamp
Mounting	spring clamp
Packing Unit	6
IP Rating	IP54


Product Attributes




Polar Diagrams

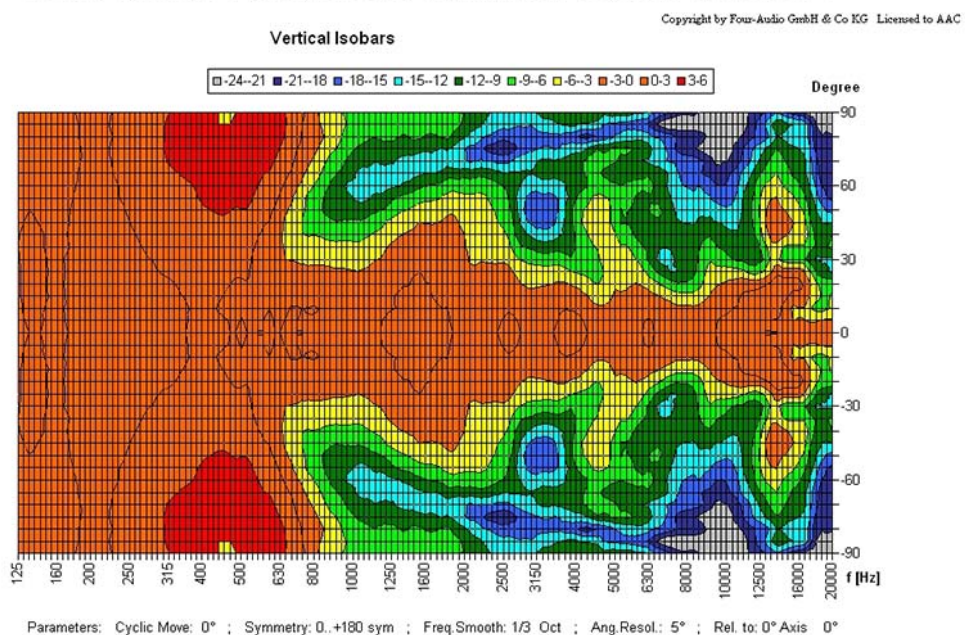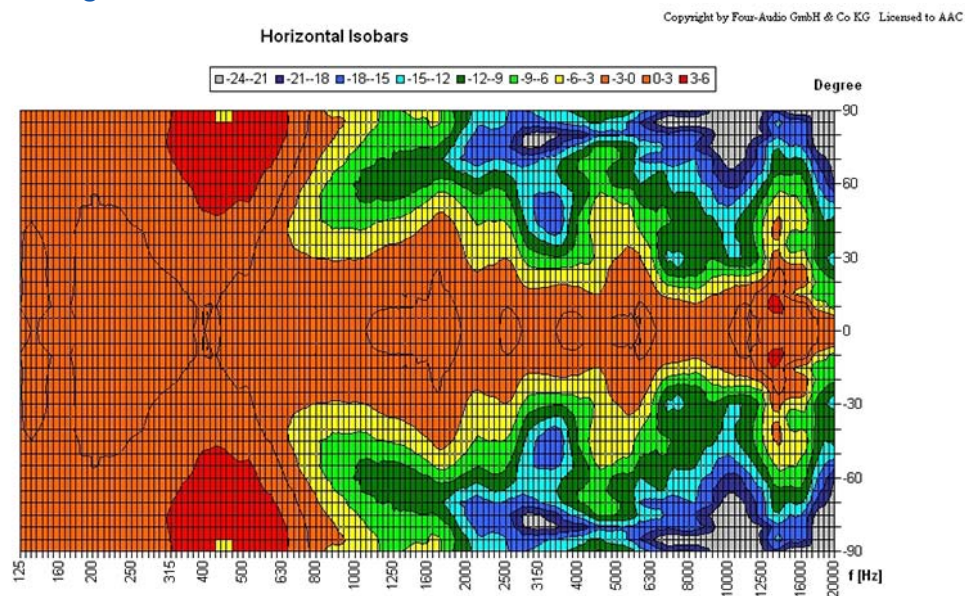

Frequency Response Diagrams

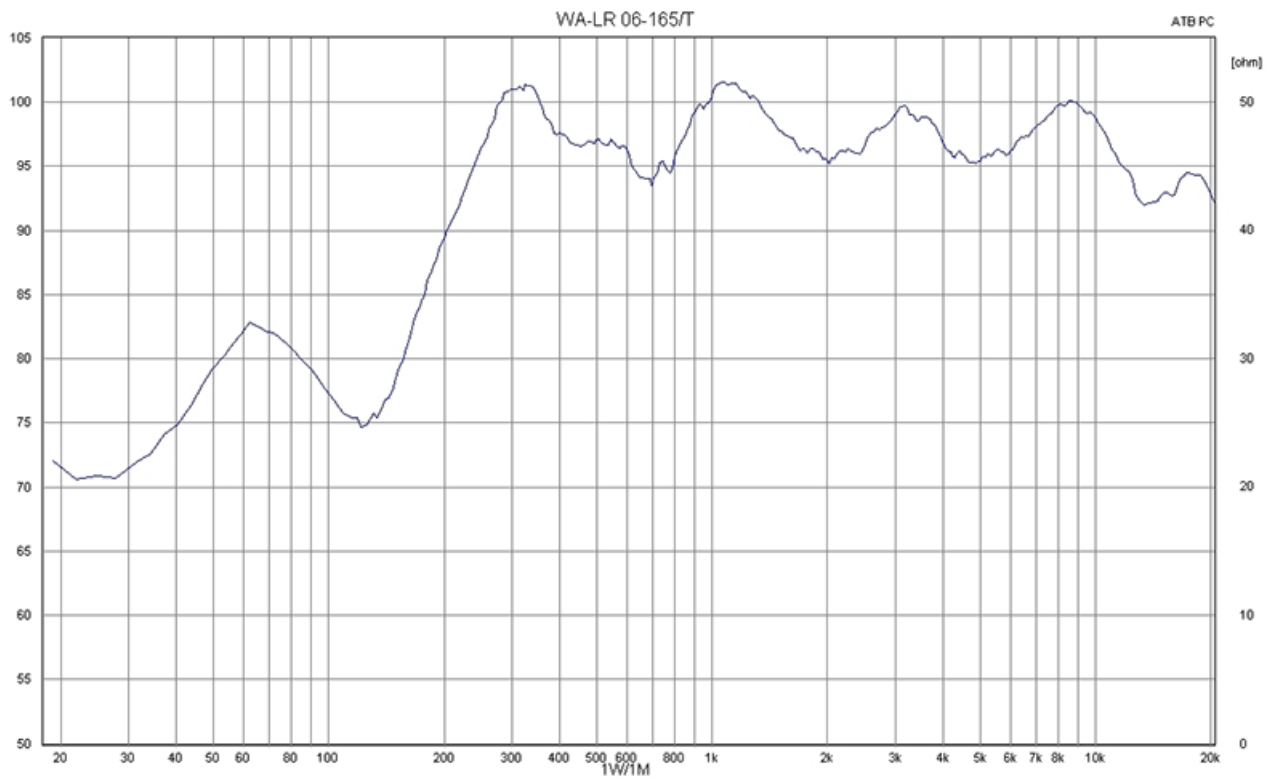

Technical Diagrams

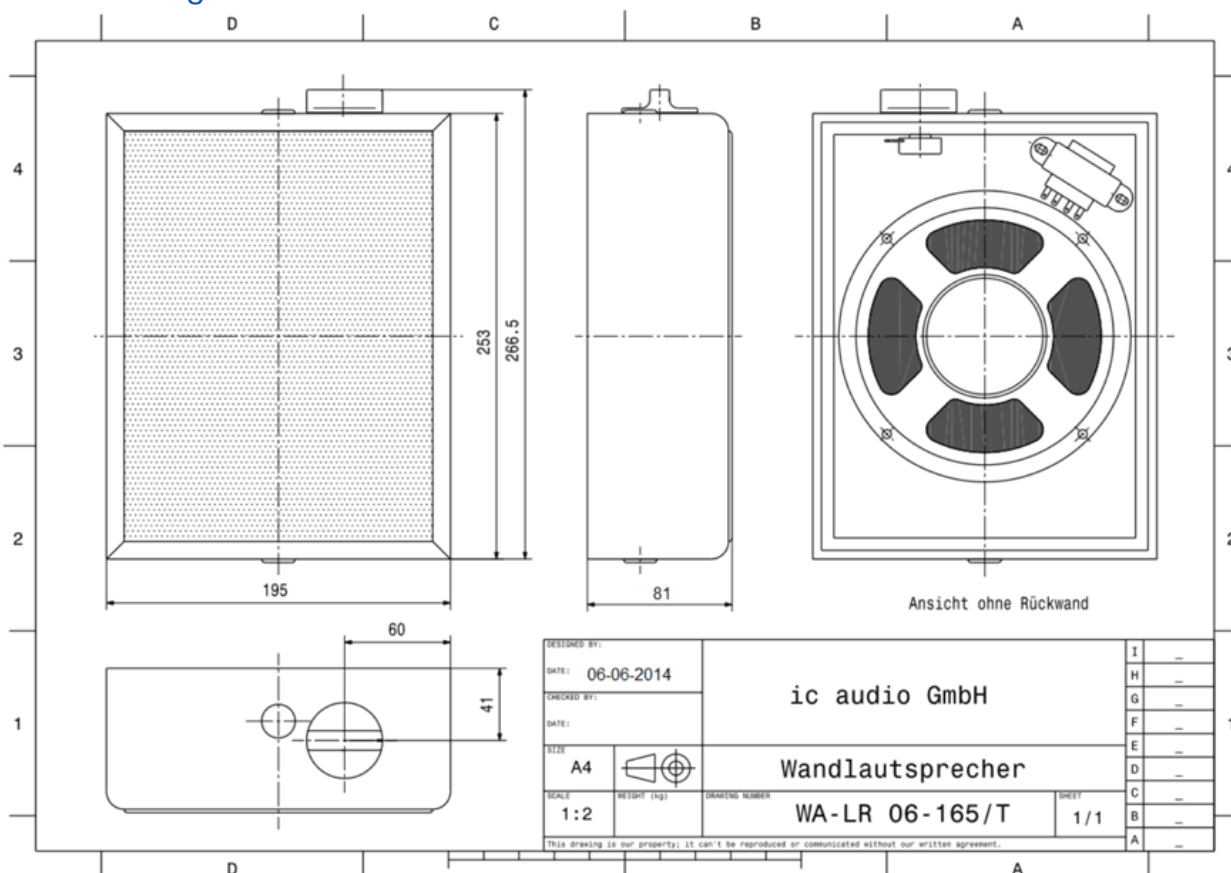

RoHS compliant (2011/65/EU)



Article Nr.:
41613575

Packing Unit:
6

