



DL-P 06-100/T

- quick mounting
- UV-resistant
- high impact ABS plastic

The 6W powered speaker is equipped with a 100mm full-range loudspeaker and a 100V transformer with 3 power adjustments. The impact-resistant ABS housing (UL 94-HB) in RAL 9010 guarantees long-term stability. Quick and easy mounting with spring clamps and short tension distance.

The speaker is protected by the high protection class IP 44 against the risks of environmental influences.

The speaker is connected by a 2-pin push-clamp.

This speaker is suitable for a ceiling strength of about 3 – 40 mm. Our specification is primarily related to solid ceilings, for ceilings with soft materials a higher ceiling thicknesses could be necessary. In addition, stronger cables and other fittings may also result in changes of the appropriate setup. With regard to the variety of materials and manufacturers, we recommend to build in a sample of the speaker to match the requirements accurately.

Technical Data


Description	DL-P 06-100/T
Power	6/3/1,5 W
Frequency Range	131 - 18.800 Hz
Frequency Response	97 - 21.500 Hz
SPL 1W/1m, peak	100,7 dB
SPL Pmax/1m, peak	108,5 dB
Sensitivity 1W/1m	90,6 dB
Dispersion (-10dB)	180° (h) / 180° (v)
Temperature range	-20 / +80 °C
Dimensions	150x93 mm
Weight (net)	0,58 kg
Colour	RAL 9010
Connector	2-pin push clamp
Mounting	spring clamp
Packing Unit	12
Ceiling Cut-out	126 mm
IP Rating	IP44

Please note: Because of many different types of ceiling materials and ceiling strengths we recommend to build in a sample of the speaker to match the requirements accurately.


Product Attributes




Polar Diagrams

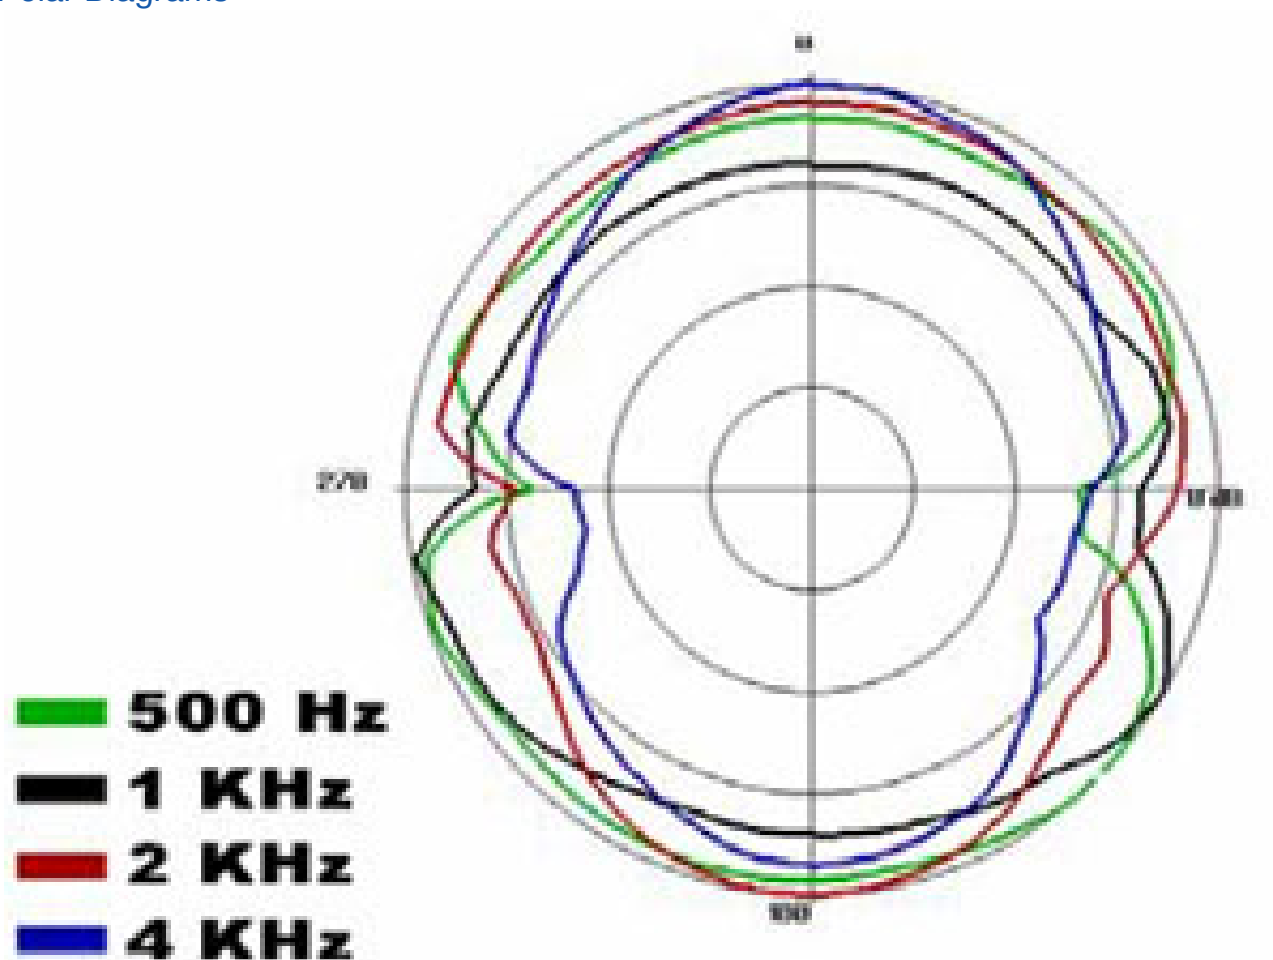

Frequency Response Diagrams

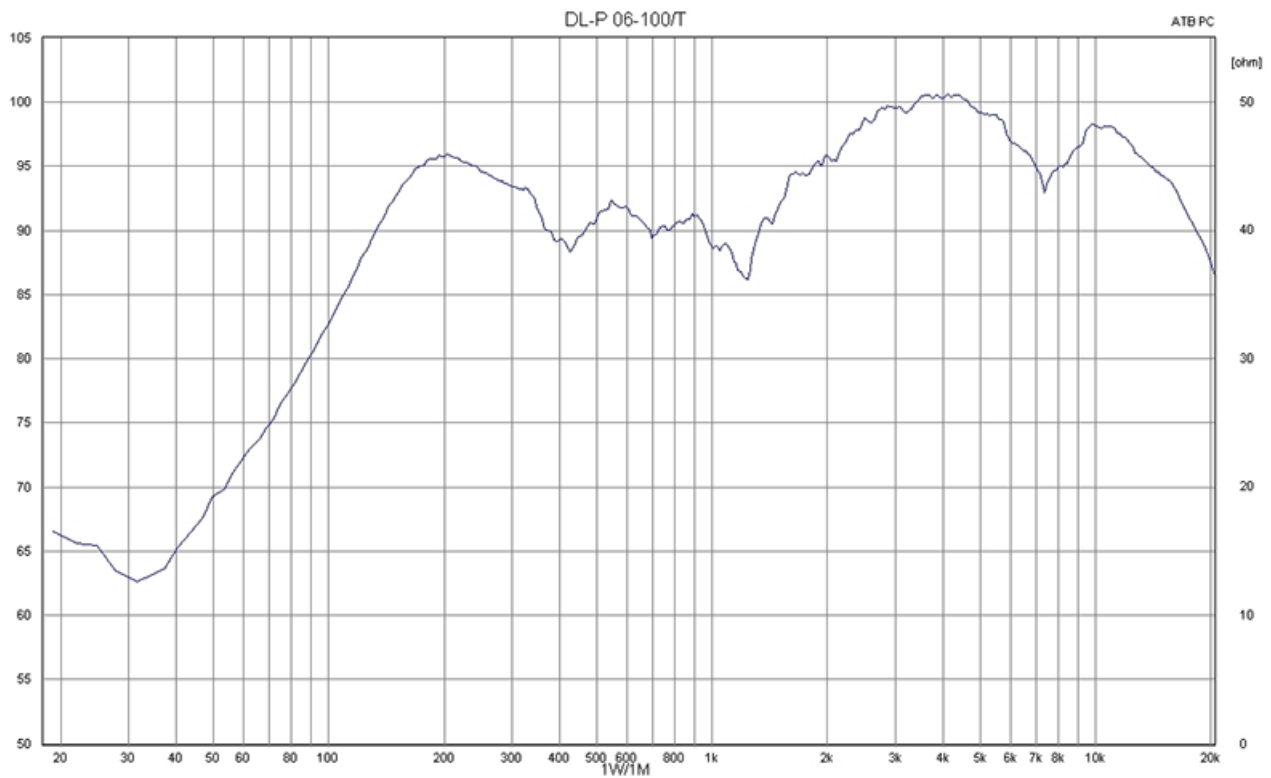

Technical Diagrams

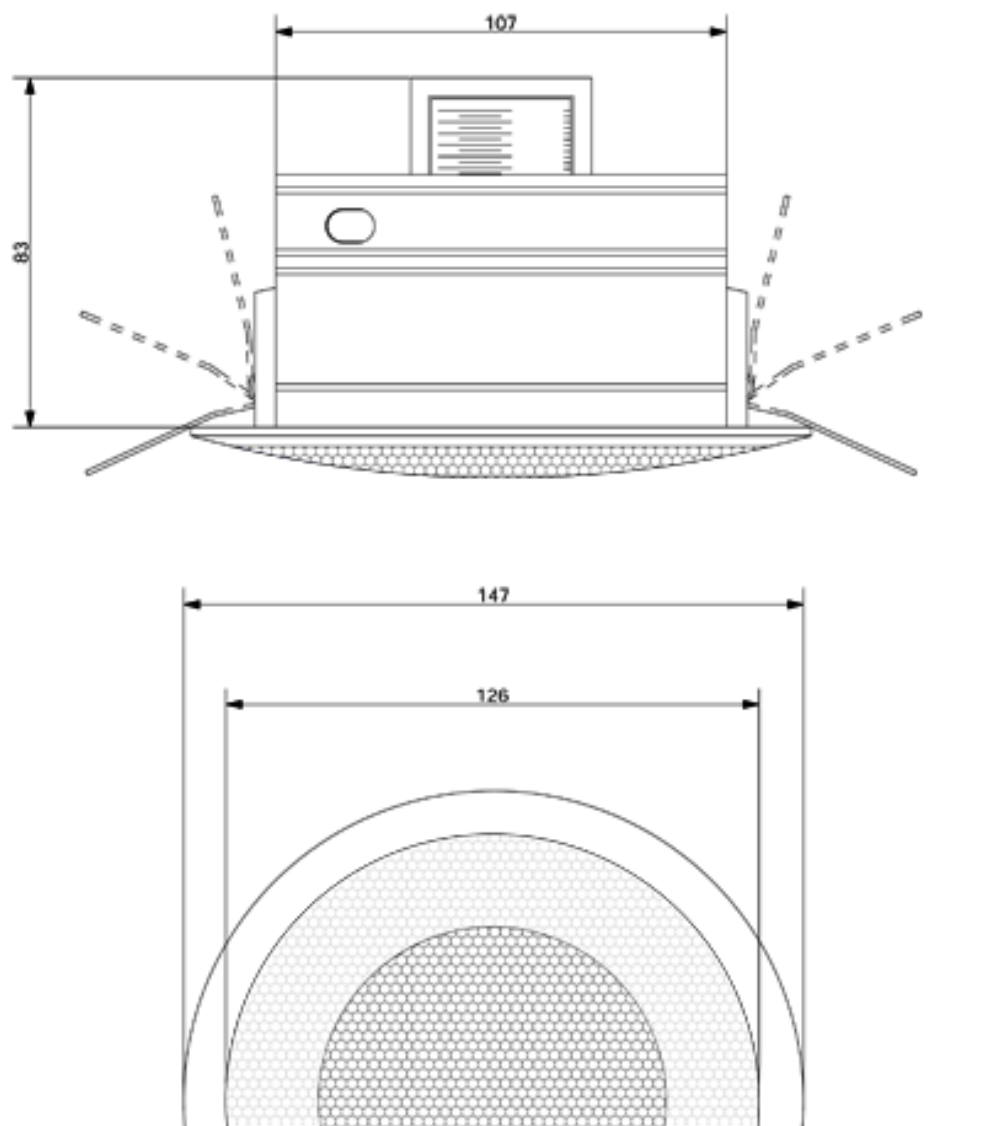

RoHS compliant (2011/65/EU)

**Article Nr.:**

10222023

Packing Unit:

12

