



DK 15/T

- high sound pressure level
- weather proof
- low-distortion sound

The 15W powered speaker is equipped with a 100V line transformer with 4 power adjustments, also low-impedance operation (20ohm) is possible. The power adjustment is easily done by turning the screw on the back of the speaker. The impact-resistant ABS housing UI94V0 in RAL 7035 guarantees long-term stability. The speaker is secured with the high protection class IP 66 against the security risks of environmental influences.

Included is a U-shaped, stainless steel universal mount for flexible installation. The speaker is connected by a 2-pin connection cable with 1 meter length.

Optionally available is a mast bracket (MB) for about 200mm mast diameter.

Technical Data


Description	DK 15/T
Power	15/7,5/3,75/1,9 (20) W
Frequency Range	677 - 5.400 Hz
Frequency Response	270 - 12.000 Hz
SPL 1W/1m, peak	108,5 dB
SPL Pmax/1m, peak	120,3 dB
Sensitivity 1W/1m	107,2 dB
Dispersion (-10dB)	240° (h) / 240° (v)
Temperature range	-20 / +90 °C
Dimensions	208,5x271,5 mm
Weight (net)	2,00 kg
Colour	RAL 7035
Connector	2-pin cable + switch
Mounting	V2A Universal bracket
Packing Unit	8
Accessories	MB 200
IP Rating	IP66

Product Attributes




Polar Diagrams


Copyright by Four-Audio GmbH & Co KG Licensed to AAC

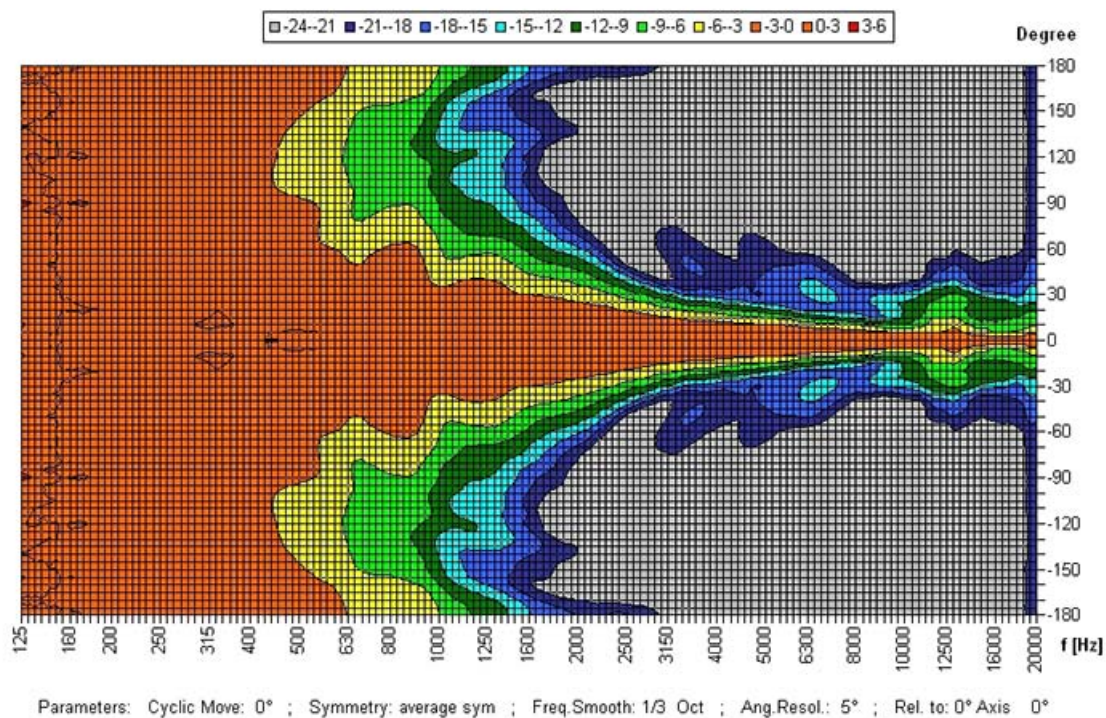

Frequency Response Diagrams

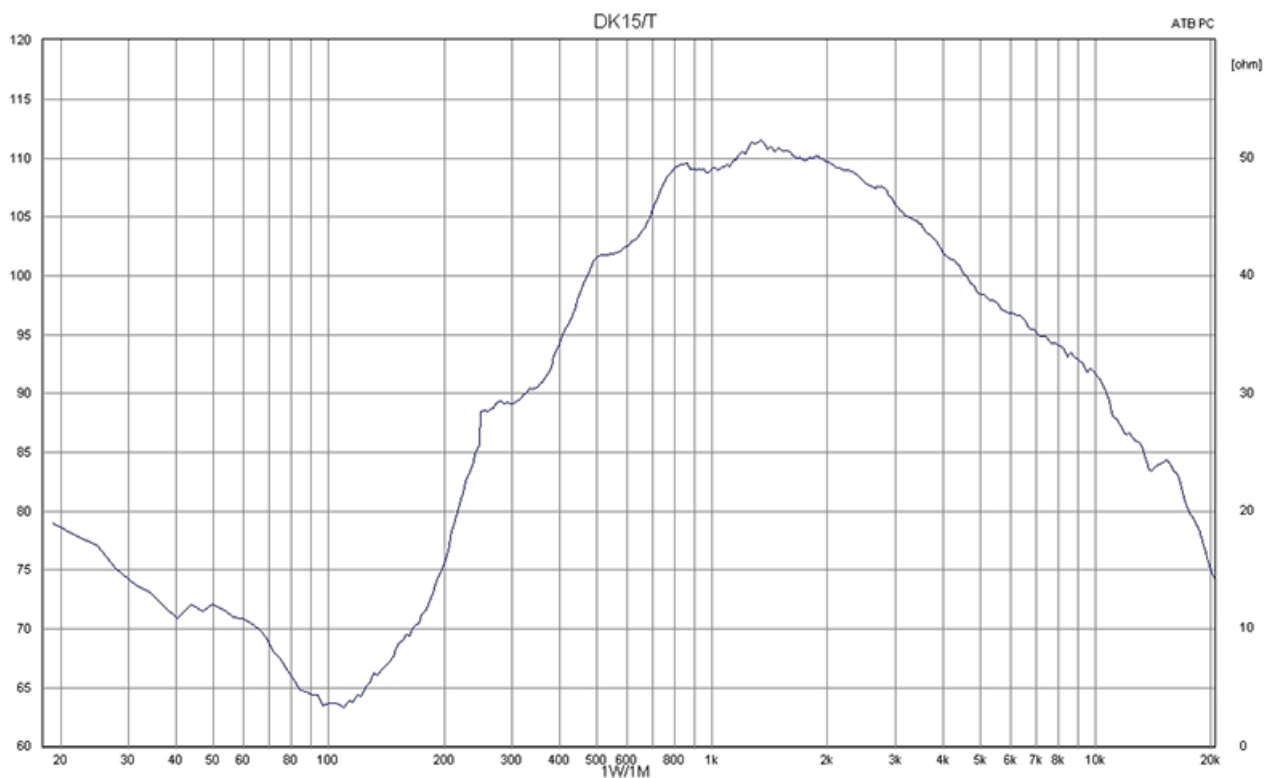

Technical Diagrams

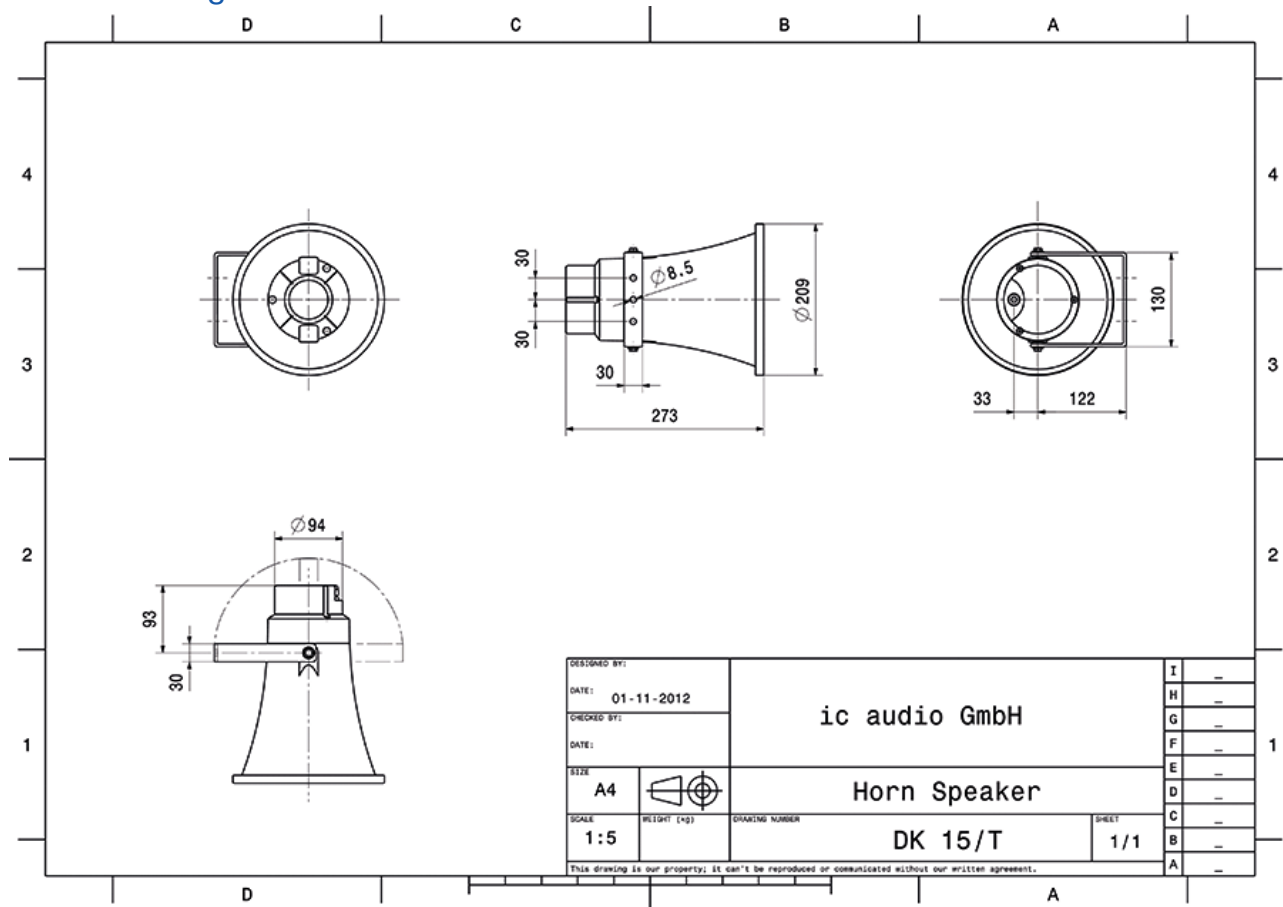

RoHS compliant (2011/65/EU)



Article Nr.:
71516500

Packing Unit:
8

