



DL-E 06-165/T

- quick mounting
- shock-resistant housing
- best value for money



The 6W powered speaker is equipped with a 165mm full-range loudspeaker chassis and a 100V transformer with 3 power adjustments. The powder coated metal similar in RAL 9016 guarantees long-term stability. Quick and easy mounting with spring clamps and short tension distance. The speaker is connected by a 4-pin screw terminal.

Special paint of the speaker in 4-digit RAL- or NCS-colour available at extra cost.

This speaker is suitable for a ceiling strength of about 2 – 42 mm. Our specification is primarily related to solid ceilings, for ceilings with soft materials a higher ceiling thicknesses could be necessary. In addition, stronger cables and other fittings may also result in changes of the appropriate setup. With regard to the variety of materials and manufacturers, we recommend to build in a sample of the speaker to match the requirements accurately.

Technical Data



Description	DL-E 06-165/T
Power	6/3/1,5 W
Frequency Range	64 - 21.000 Hz
Frequency Response	55 - 24.000 Hz
SPL 1W/1m, peak	100,0 dB
SPL Pmax/1m, peak	107,0 dB
Sensitivity 1W/1m	98,8 dB
Dispersion (-10dB)	180° (h) / 180° (v)
Temperature range	-20 / +80 °C
Dimensions	200x55 mm
Weight (net)	0,60 kg
Colour	RAL 9016
Connector	4-pin screw terminal
Mounting	Quick fit mounting
Packing Unit	12
Accessories	FE 165
Ceiling Cut-out	170 mm

Please note: Because of many different types of ceiling materials and ceiling strengths we recommend to build in a sample of the speaker to match the requirements accurately.



Product Attributes




Polar Diagrams

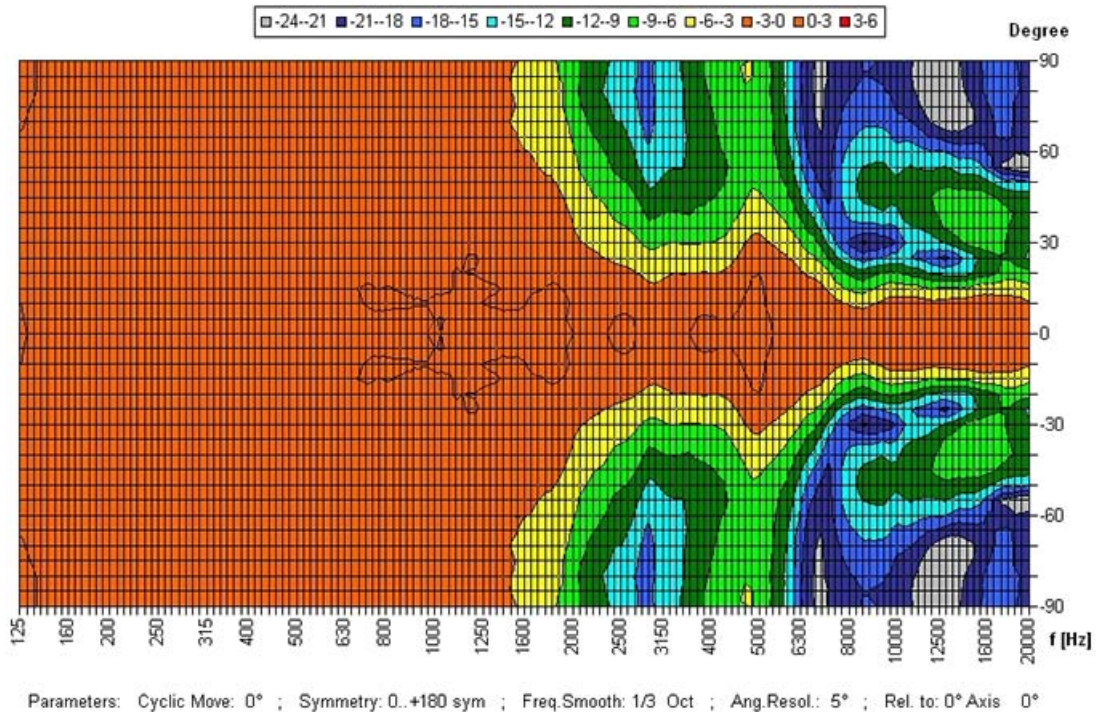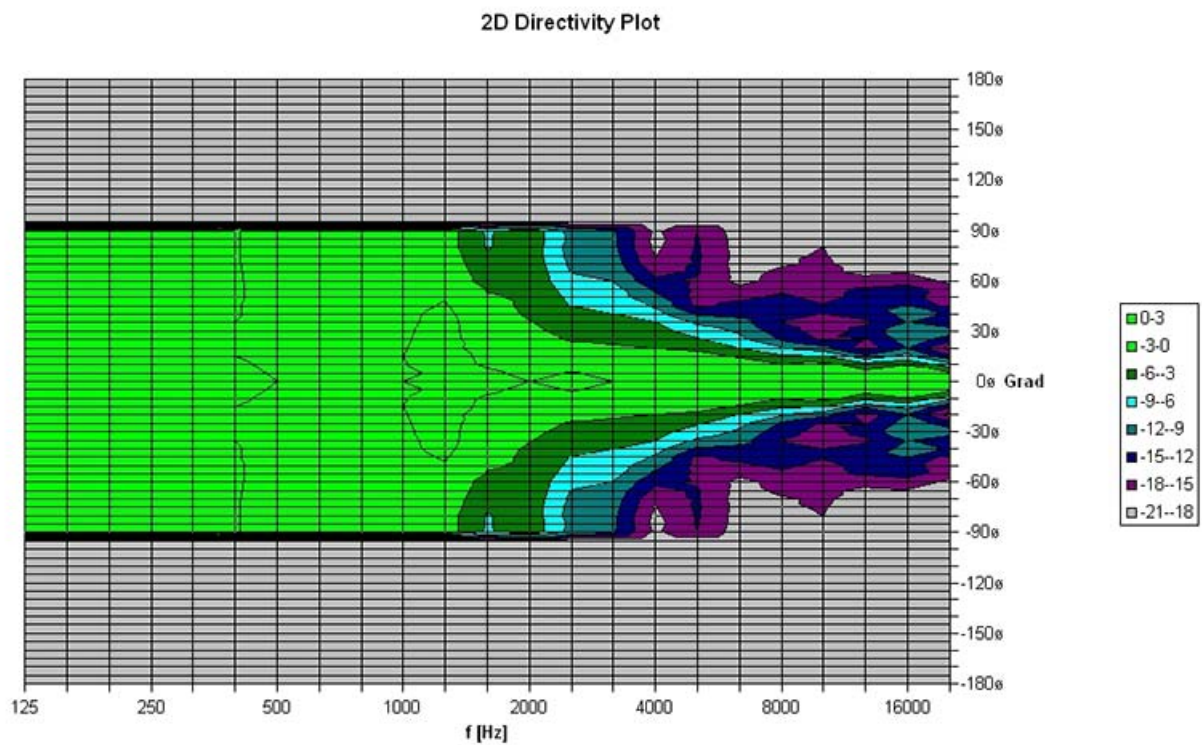

Frequency Response Diagrams

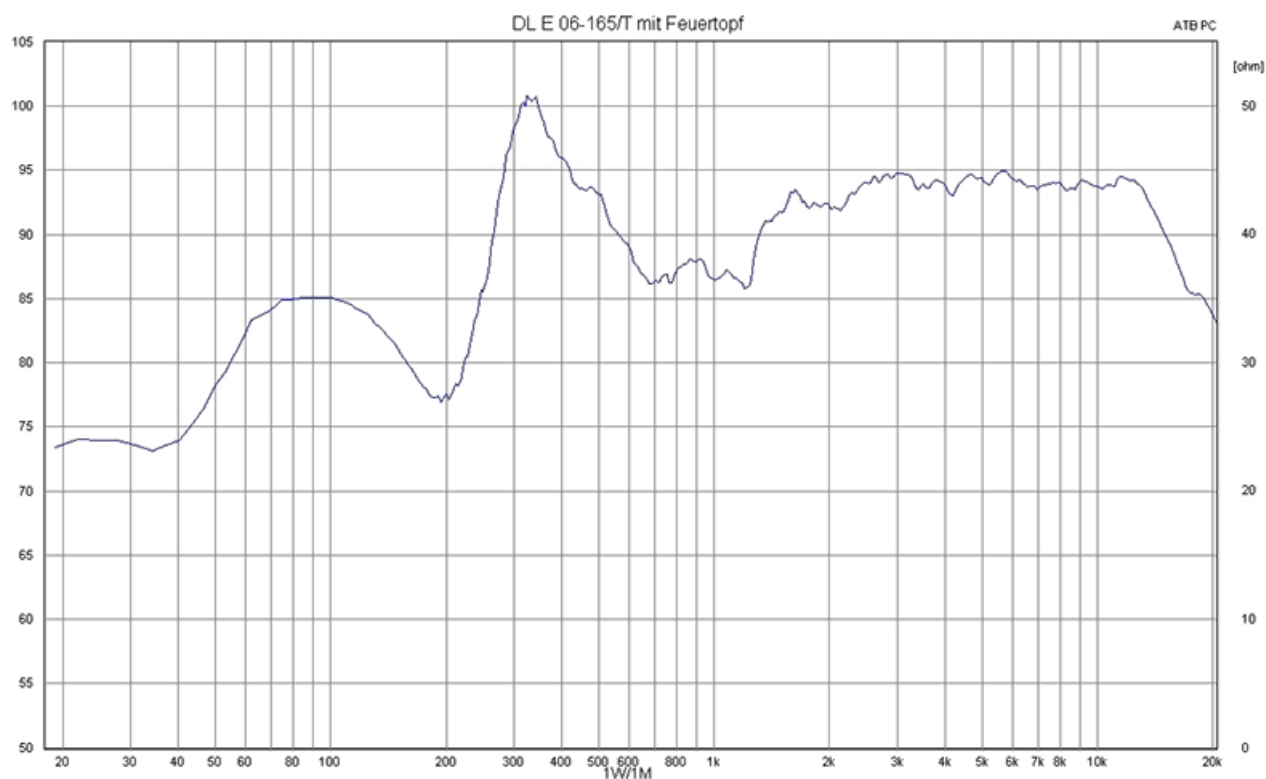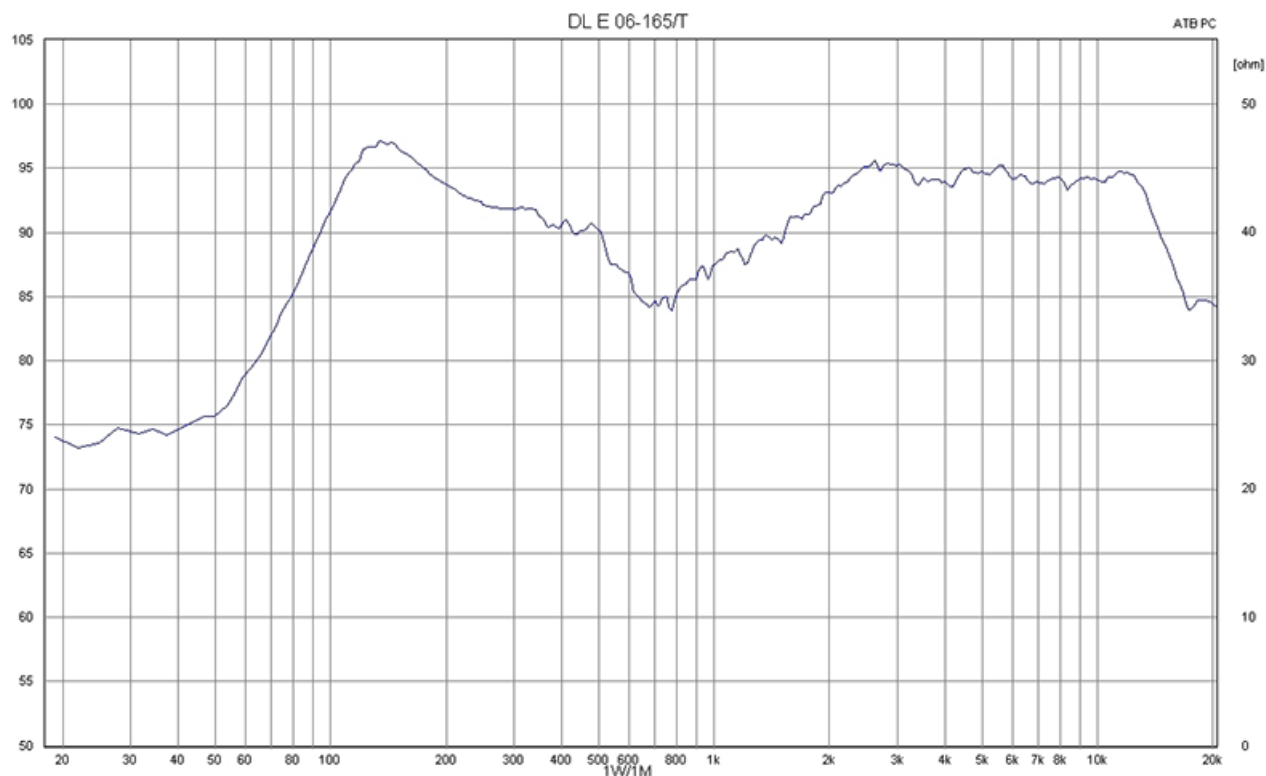

Technical Diagrams

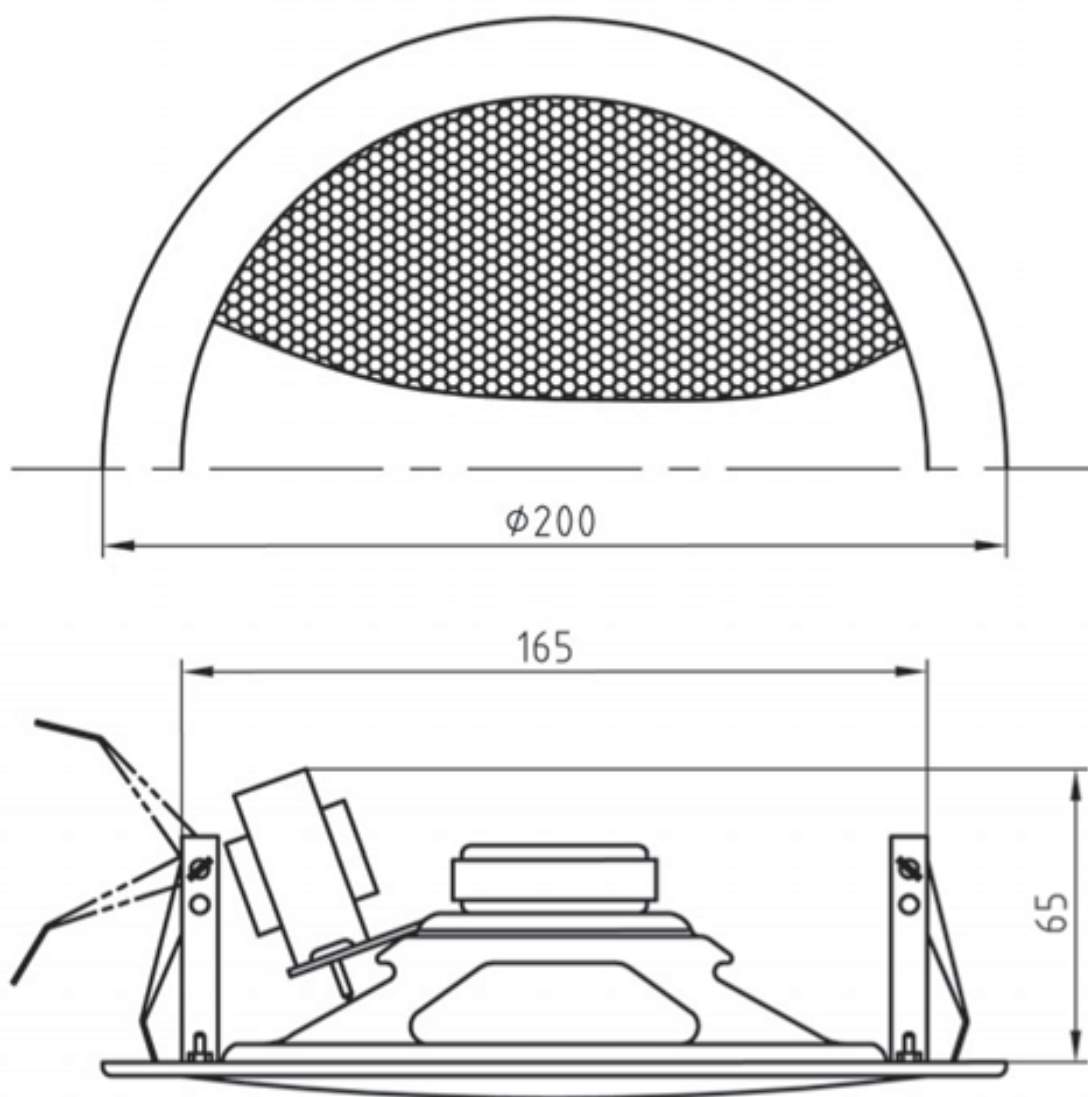

RoHS compliant (2011/65/EU)



Article Nr.:
20071041

Packing Unit:
12

