



DL-F 04-165/T

- shock-resistant housing
- 8 screws for tight fix
- 100mm built-in depth



The 4W ceiling loudspeaker is equipped with a 165 mm full-range loudspeaker and a 100V transformer with 3 power adjustments. The powder-coated metal housing in RAL 9010 guarantees lasting stability and a flawless appearance.

A WAGO connection terminal ensures quick and uncomplicated connection. The loudspeaker is impregnated against humidity and protected against environmental influences with protection class IP 21.

Strong stability is provided by 8 screws at the front. Balanced low-distortion frequency response and a high sound pressure level ensure a smooth speech and music replay.


Technical Data

Description	DL-F 04-165/T
Power	4/2/1 W
Frequency Range	125-23.500 Hz
SPL 1W/1m	92,0 dB
SPL Pmax/1m, peak	98,0 dB
Dispersion (-10dB)	180°
Temperature range	-20 / +80 °C
Dimensions	232x104 mm
Weight (net)	1,10 kg
Colour	RAL 9010
Connector	3-pin WAGO connector with strain relief and locking latch
Mounting	Screws
Packing Unit	12
Material	Metal

Product Attributes



Technical Diagrams

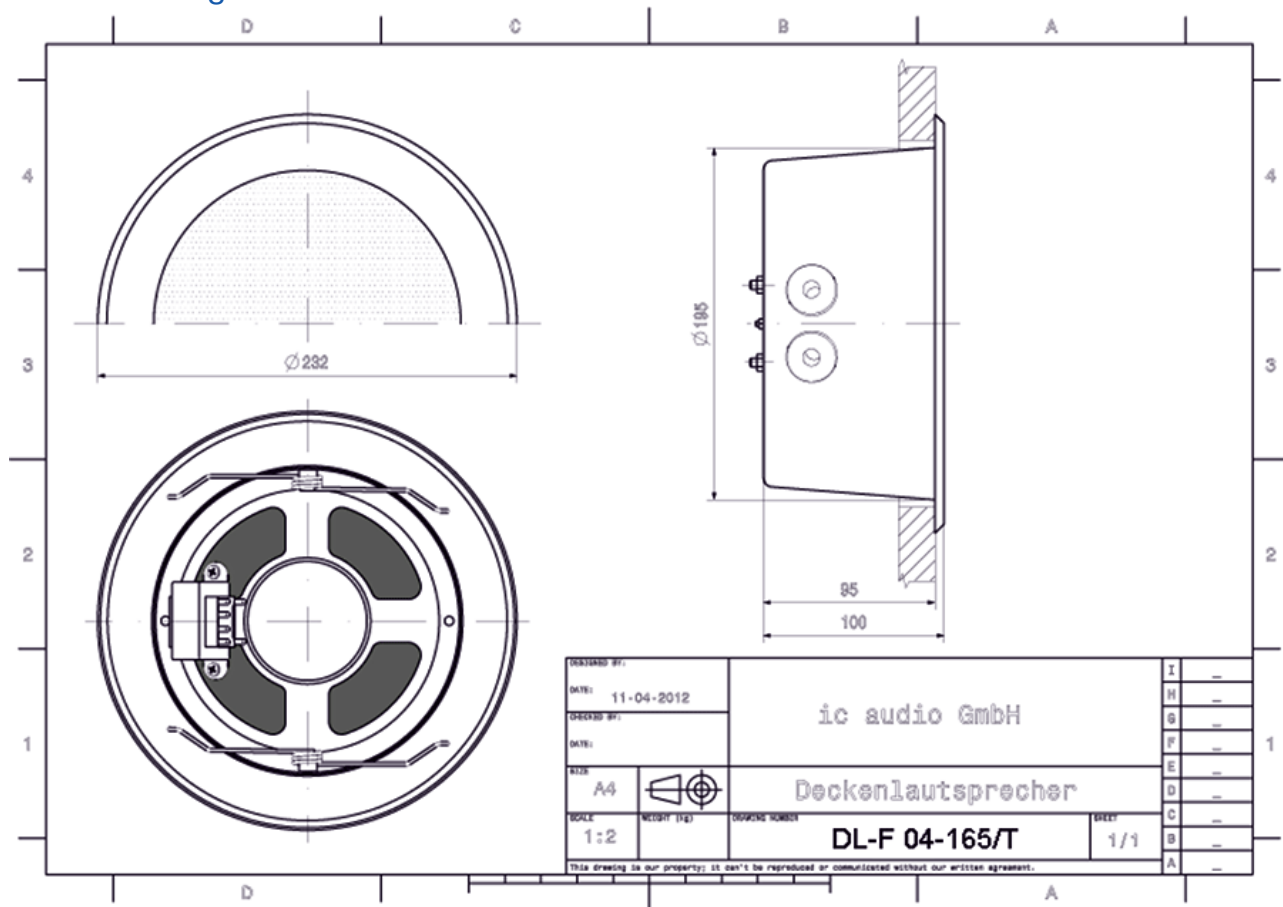

RoHS compliant (2011/65/EU)



Article Nr.:
20163032

Packing Unit:
12

