



MS 30-130/T black-EN54

- Distinctive design
- Excellent sound
- IP 65



EN 54-24:2008
Ref. Nr.: 011-13
ID-Code: SAA-LS11
 1438-CPR-0998

ic audio GmbH, Boehringerstraße 14a,
 D-68307 Mannheim, Germany

CE-Symbol gemäß Richtlinie 93/68EWG

Technical Data (Electrical)

Description	MS 30-130/T black-EN54
Power	30/15/7,5/3,75 (8ohm) W
Impedance (100V)	333/667/1333/4000 ohm
Frequency Range	60 - 24.000 Hz
Frequency Response	50 - 25.000 Hz
SPL IEC268-5, 1W/1m	82,4 dB
SPL EN54-24, Pmax/4m	86,0 dB
Sensitivity EN54-24, 1W/4m	70,4 dB
Sensitivity EN54-24, 1W/1m	82,4 dB
Dispersion -6dB, 500Hz	360° (h) 360° (v)
Dispersion -6dB, 1KHz	200° (h) 160° (v)

Dispersion -6dB, 2KHz 130° (h)
100° (v)

Dispersion -6dB, 4KHz 120° (h)
40° (v)

Technical Data (Mechanical)

Dimensions 260x160x152 mm

IP Rating IP65

Weight (net) 2,50 kg

Temperature range -25 / +70 °C

Mounting Swivel bracket

Connector 6-pin screw terminal

Terminal diameter 2,5 mm



Maximum cable passage 4,9 mm²


Colour black

Product Attributes





Technical Diagrams

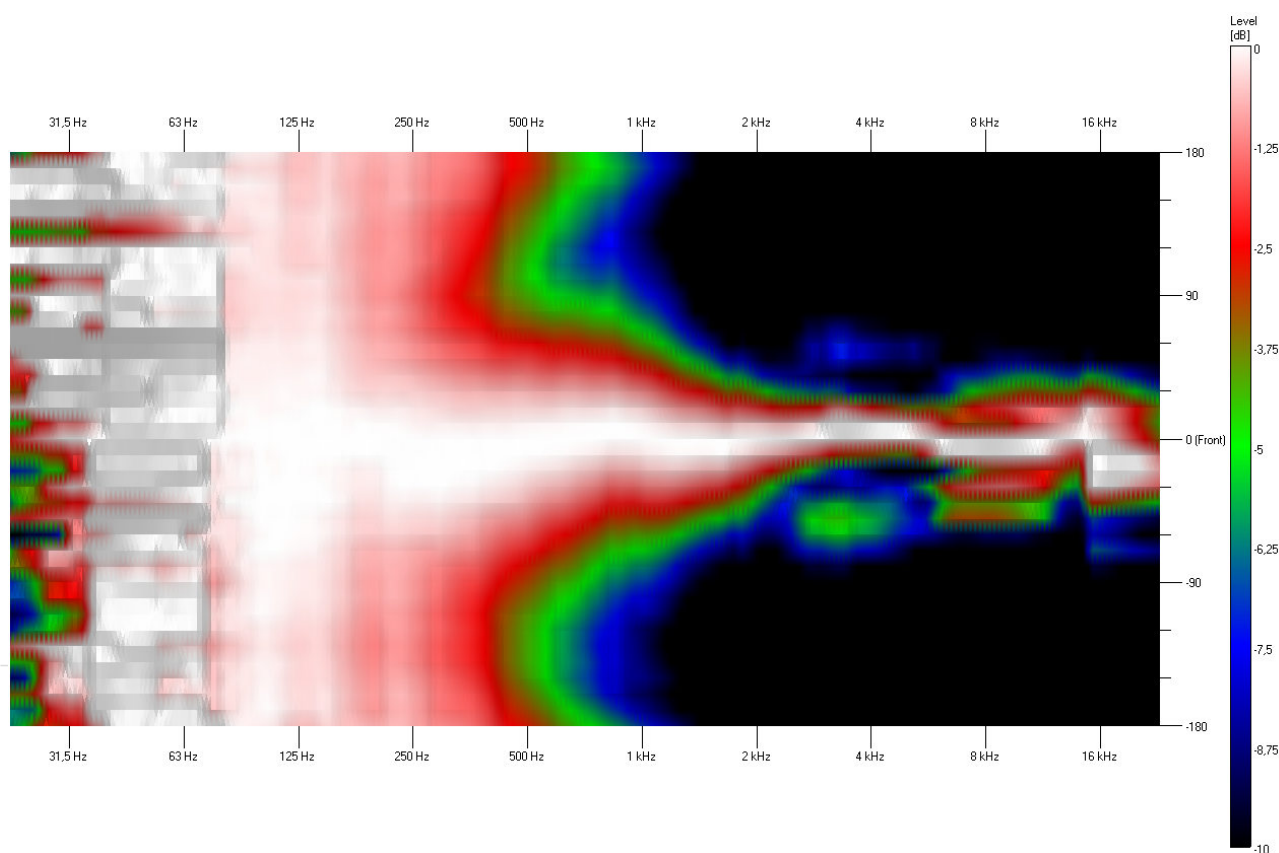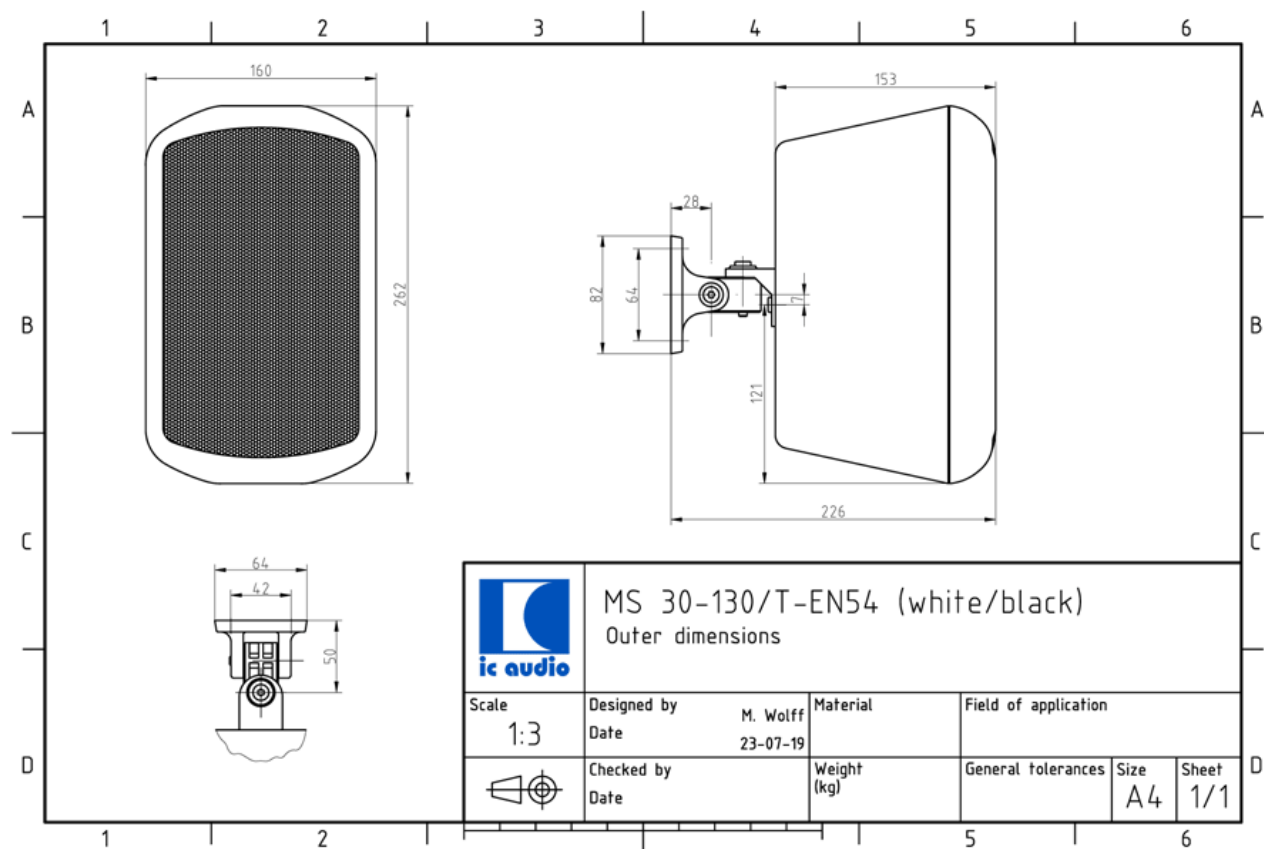

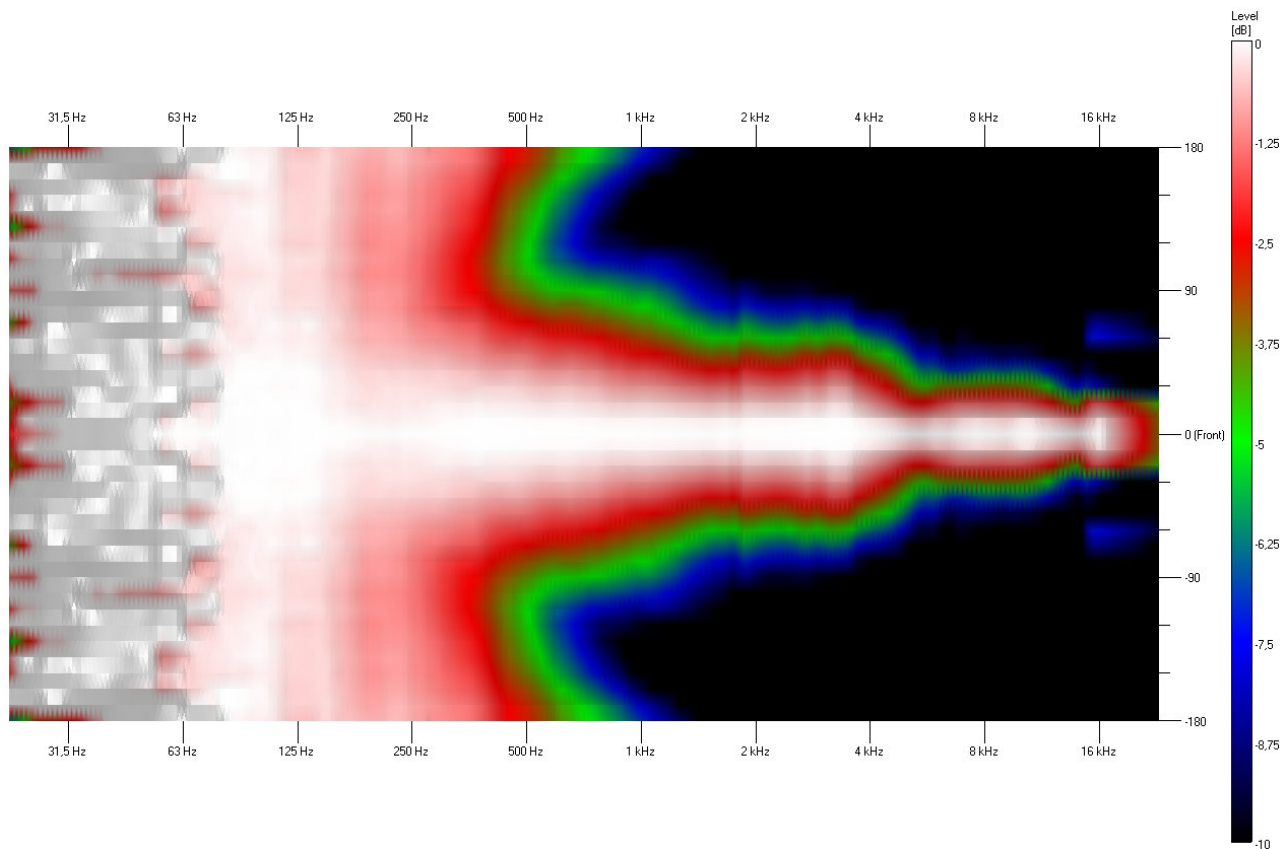



Frequency Response Diagrams

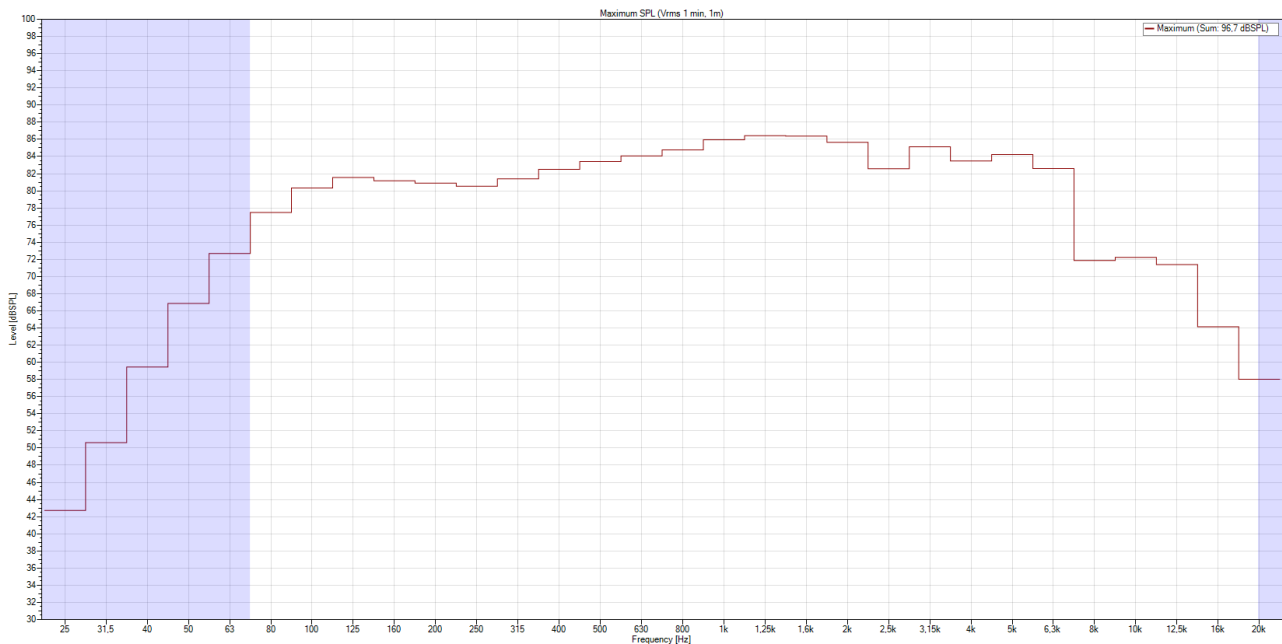


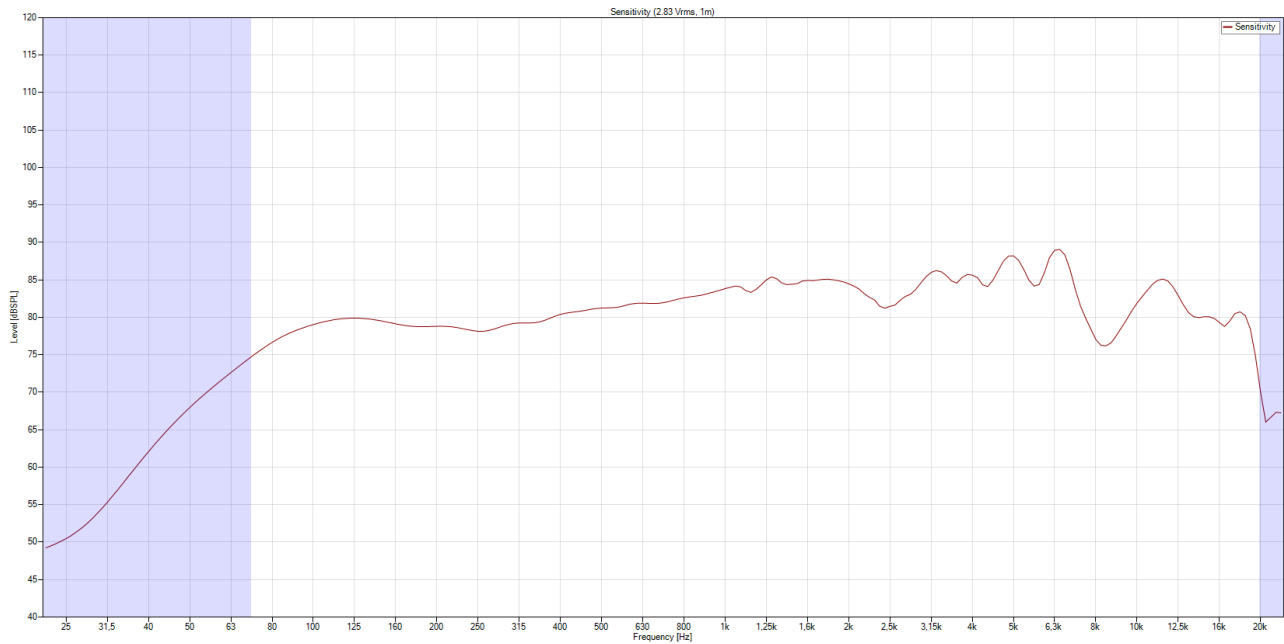


Polar Diagrams

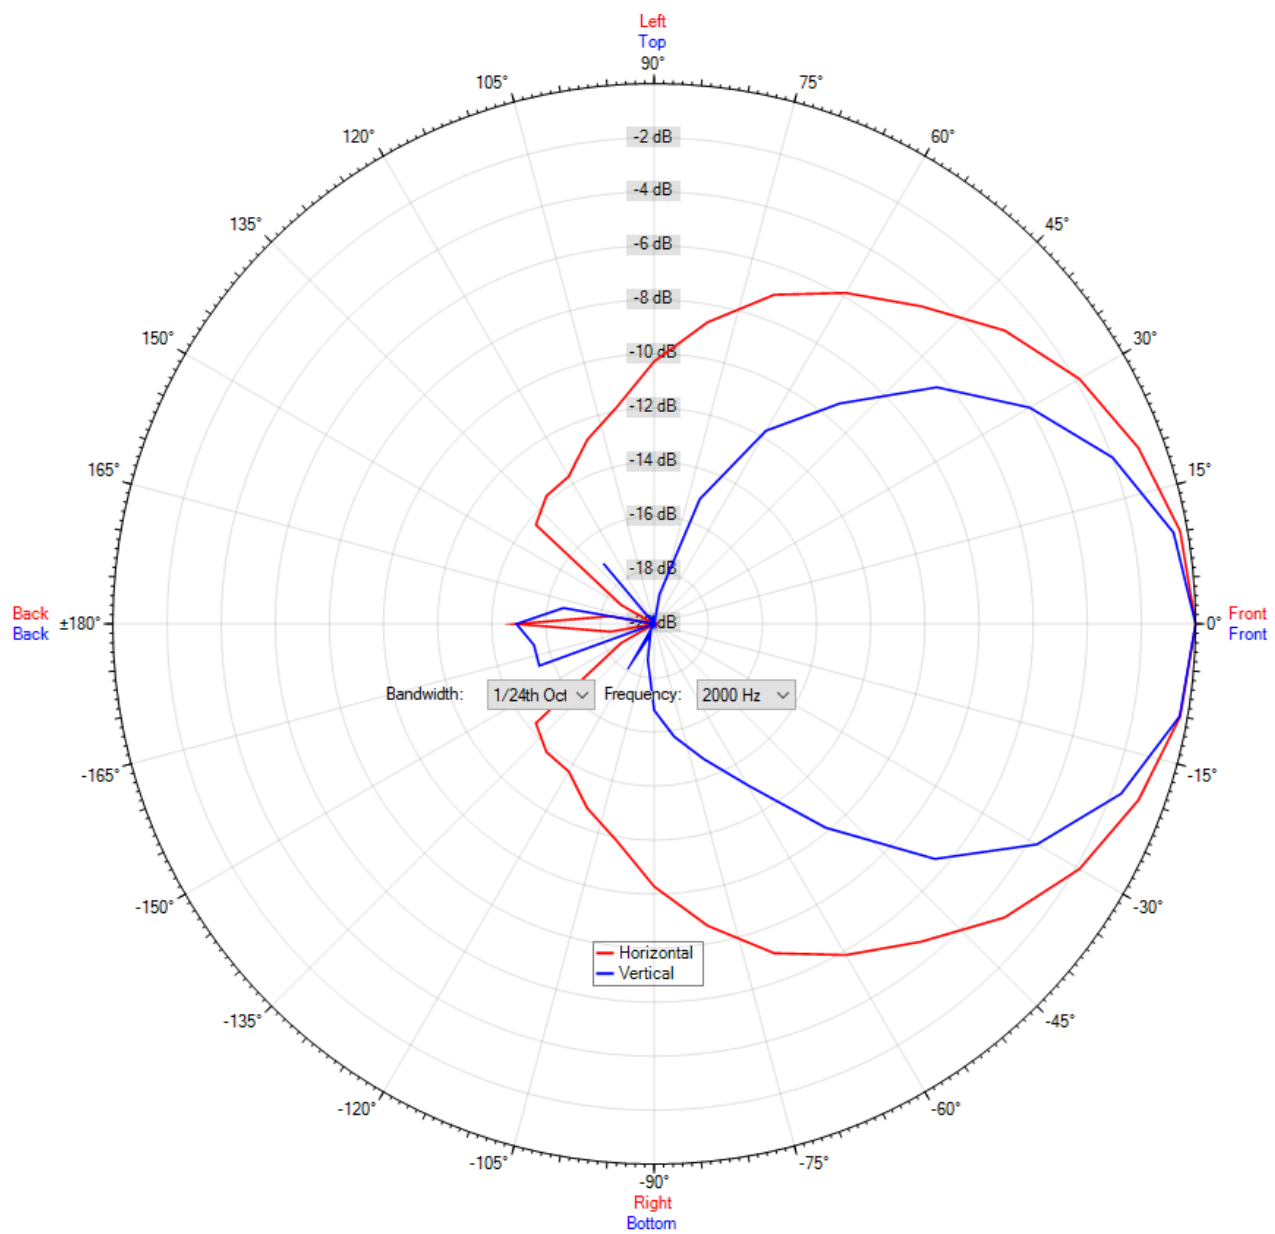

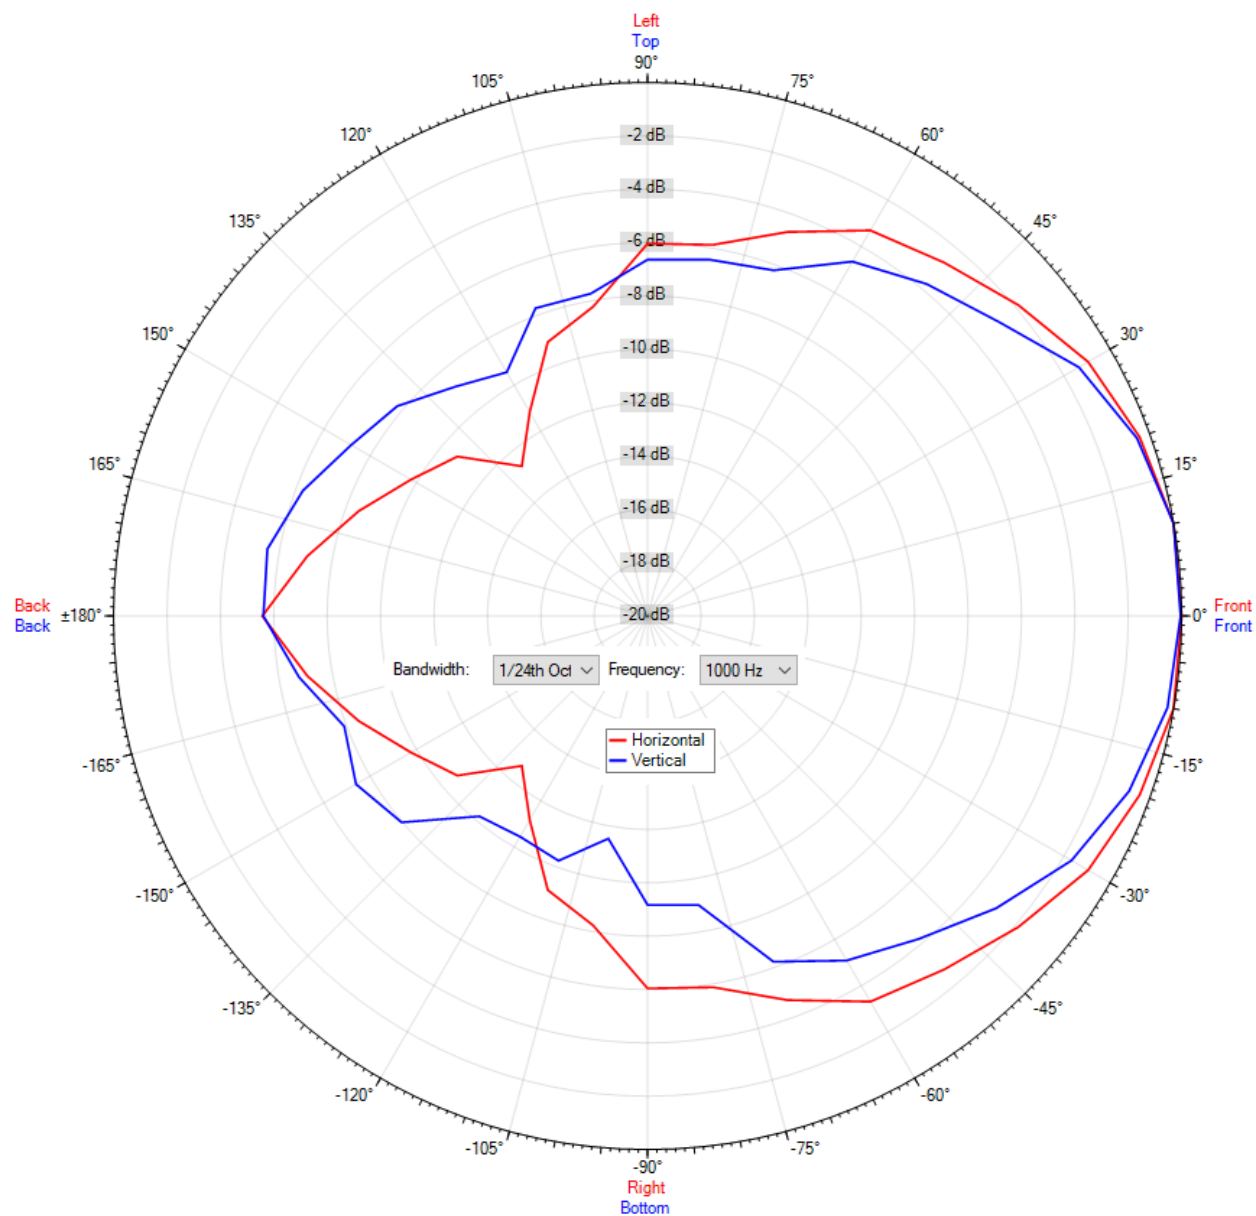

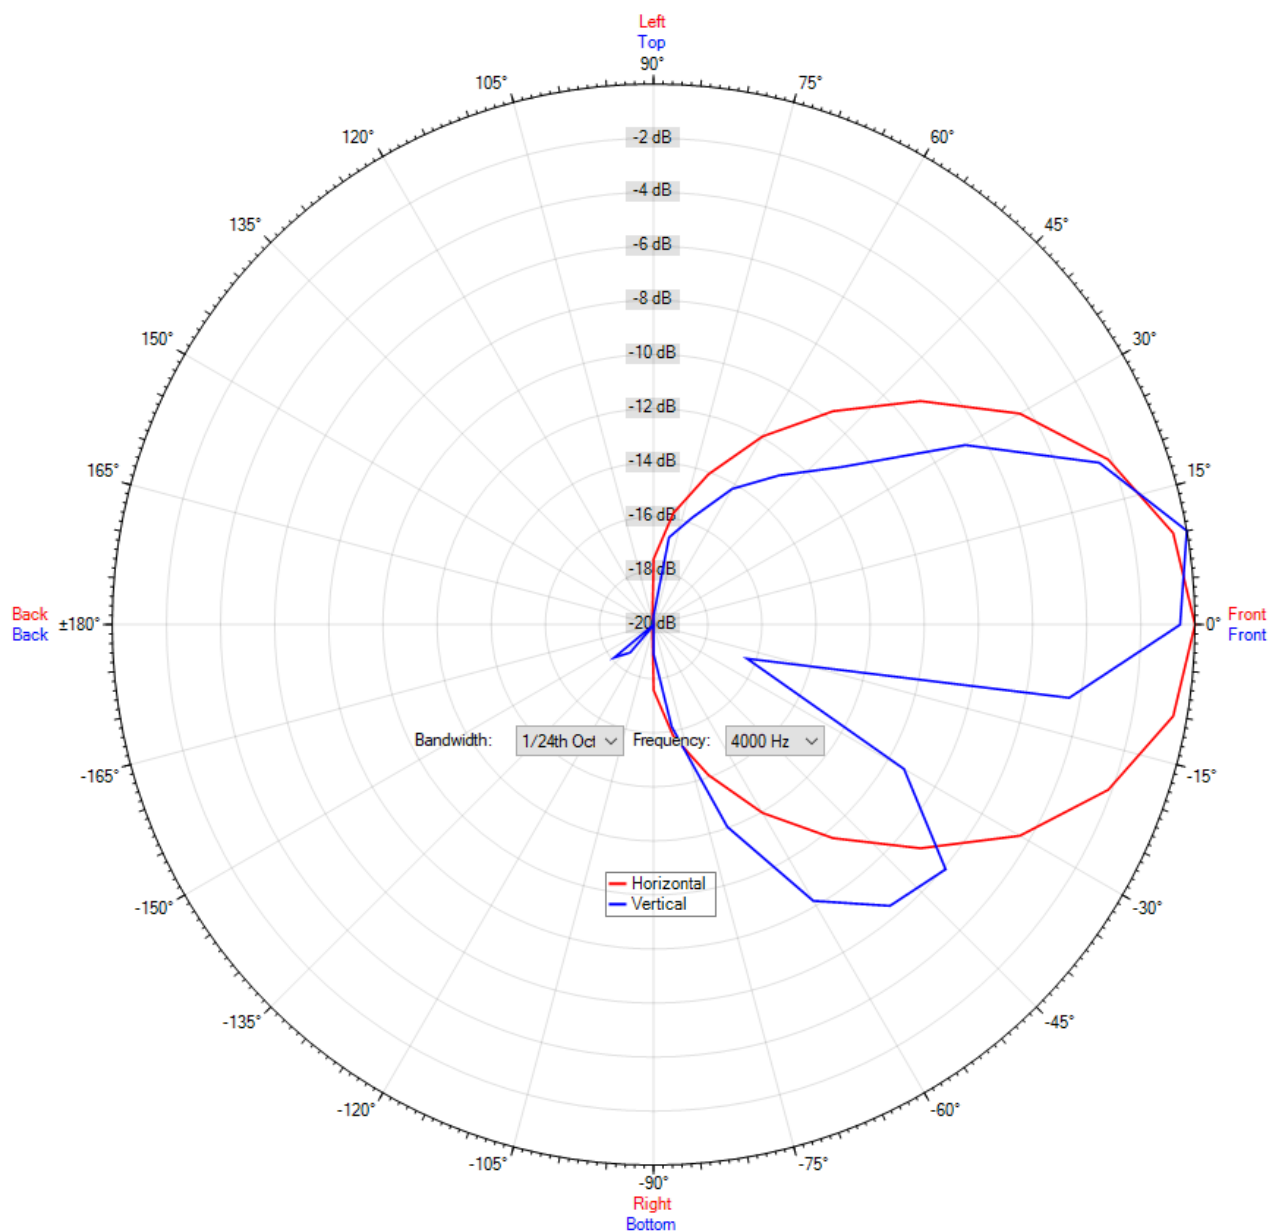

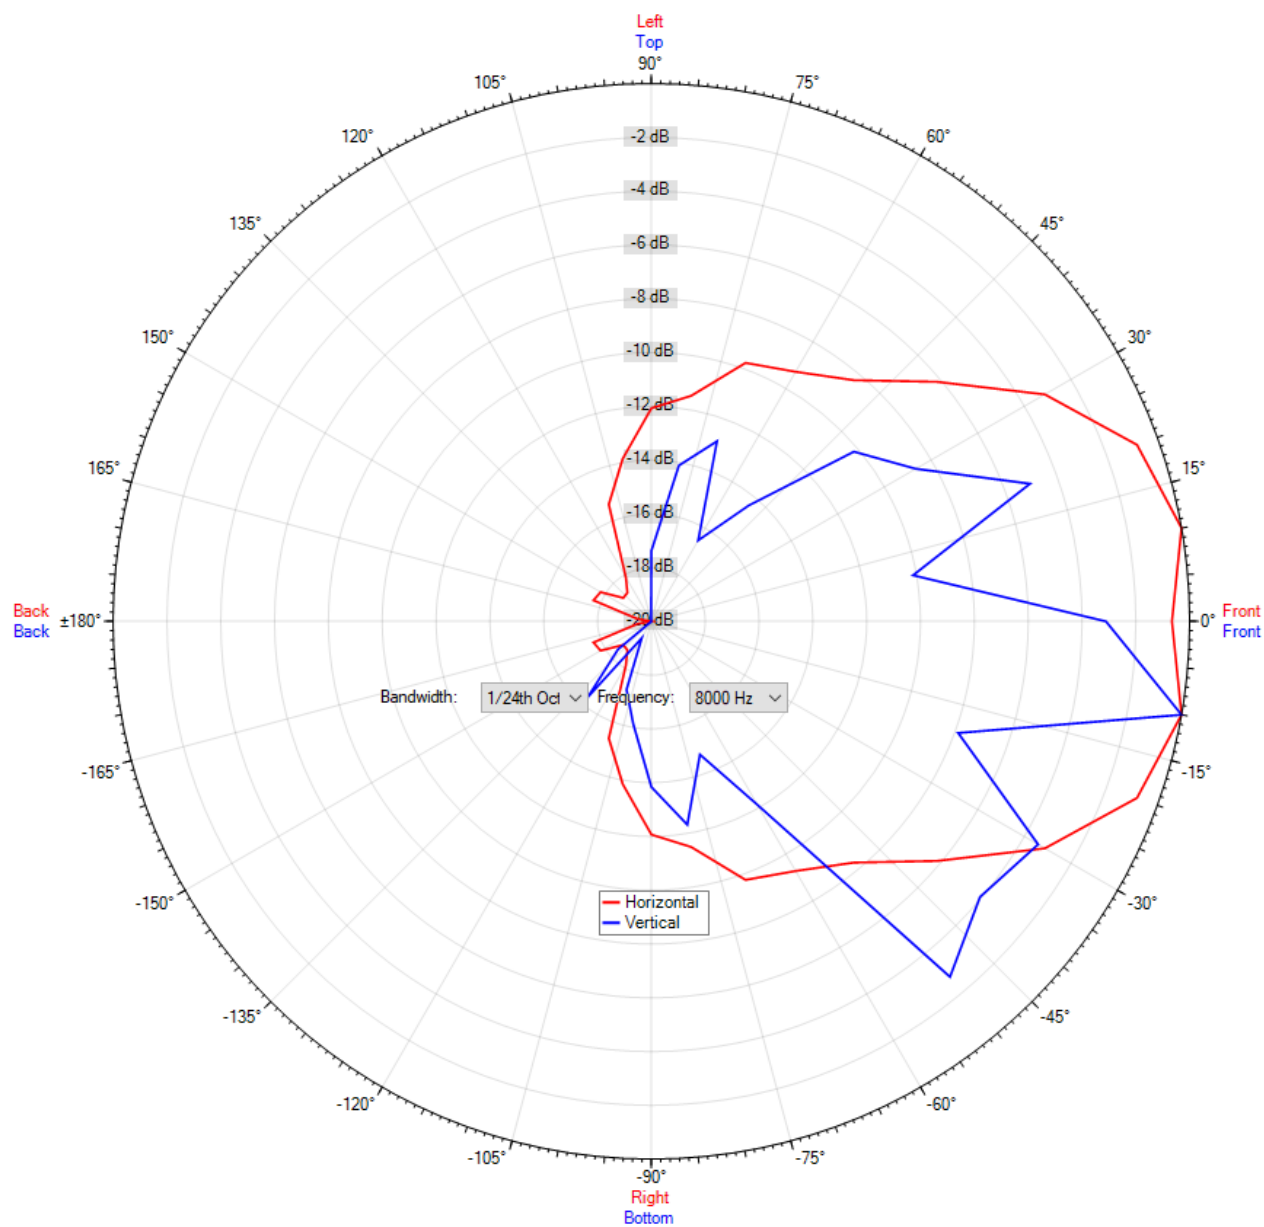

The IP rating specified is based on ic audio test results, not on CNBOP-PIB test results. Certification only verifies the minimum requirements for EN54-24 compliance.

ic audio GmbH • Boehringerstraße 14a • D-68307 Mannheim • Germany
 Fon: ++49 (0) 621 / 77096 -0 • Fax: ++49 (0) 621 / 77096 -26 • Email: info@ic-audio.com

Status: 2024-04-26

Packing Unit: 8

