



DL 10-200/T-EN54 STR

- quick mounting
- shock-resistant housing
- LED strobe flashlight



EN 54-24:2008
Ref. Nr.: 010-14
ID-Code: SAA-LS01
 1438-CPR-0233

ic audio GmbH, Boehringerstraße 14a,
 D-68307 Mannheim, Germany

CE-Symbol gemäß Richtlinie 93/68EWG

Technical Data (Electrical)

Description	DL 10-200/T-EN54 STR
Power	10/6/3/1,5 W
Frequency Range	243 - 19.700 Hz
Frequency Response	200 - 23.500 Hz
SPL IEC268-5, 1W/1m	96,0 dB
SPL EN54-24, Pmax/4m	93,0 dB
Light intensity	14 cd
Sensitivity EN54-24, 1W/4m	84,0 dB
Dispersion -6dB, 500Hz	h/v 180°
Dispersion -6dB, 1KHz	h/v 145°
Dispersion -6dB, 2KHz	h/v 70°

Dispersion -6dB, 4KHz h/v 45°

Please note: Because of many different types of ceiling materials and ceiling strengths we recommend to build in a sample of the speaker to match the requirements accurately.



Technical Data (Mechanical)

Dimensions	268x136 mm
IP Rating	IP21
Weight (net)	2,23 kg
Ceiling Cut-out	243 mm
Temperature range	-10 / +55 C°
Mounting	Quick fit mounting
Connector	2-pin ceramic block
Terminal diameter	3,2 mm
Maximum cable passage	8 mm ²
Colour	RAL 9010


Product Attributes




Technical Diagrams

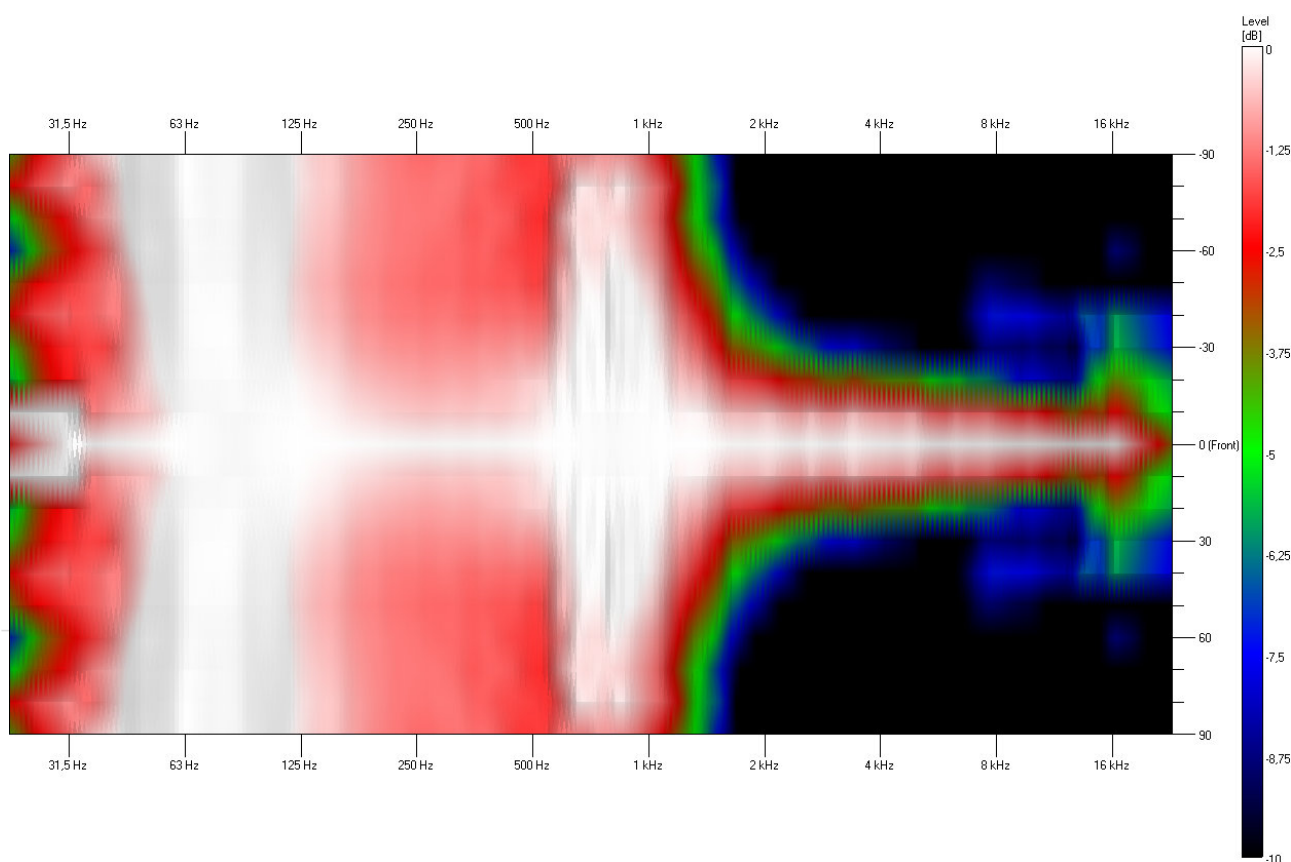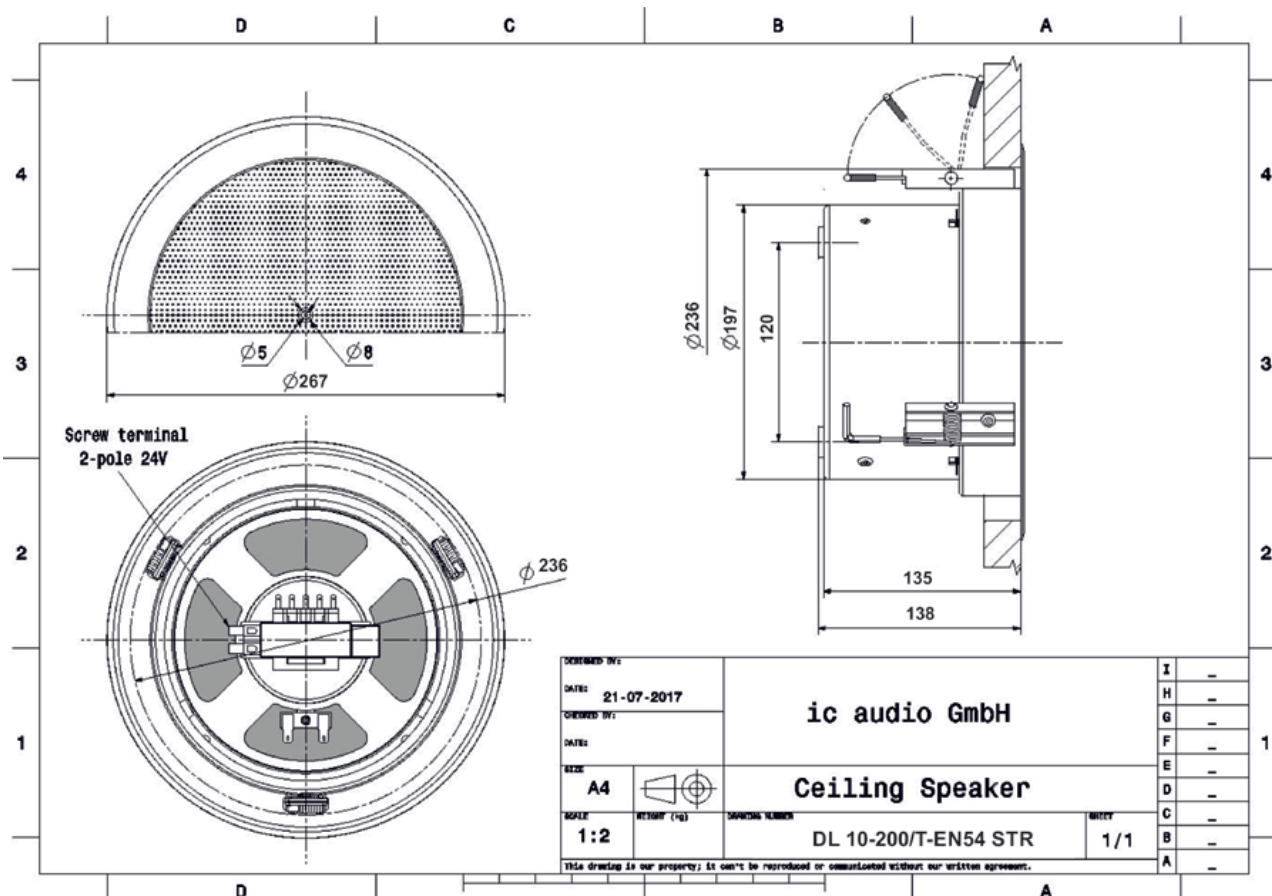



Frequency Response Diagrams

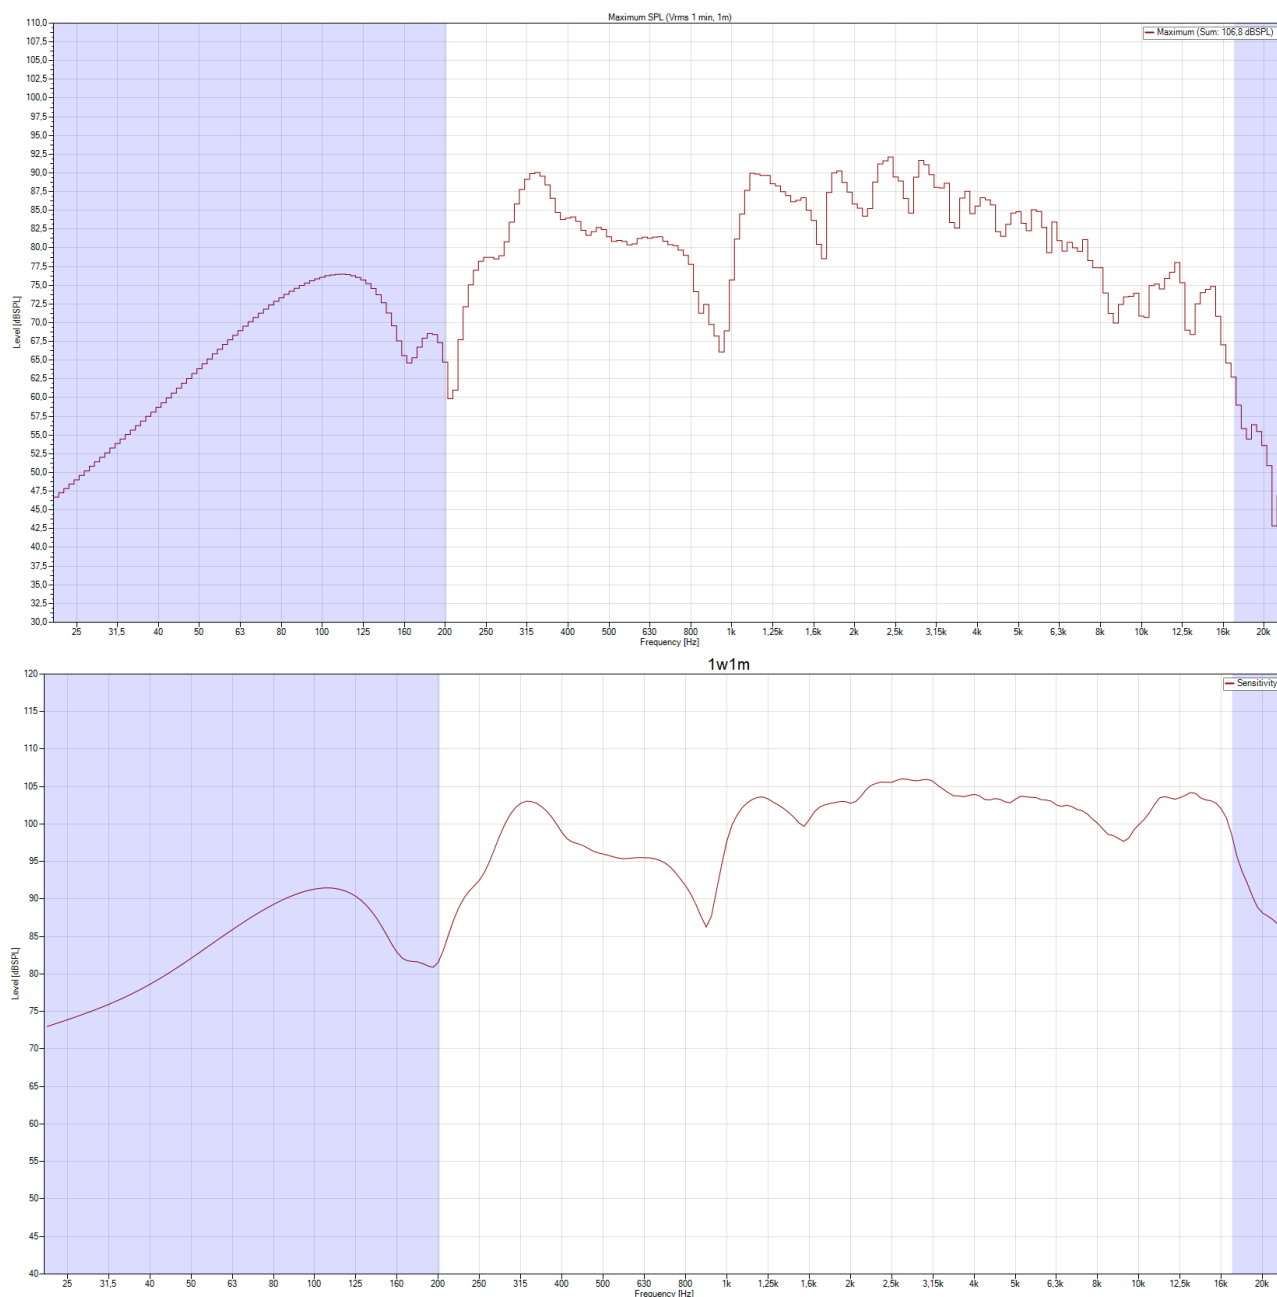


Polar Diagrams

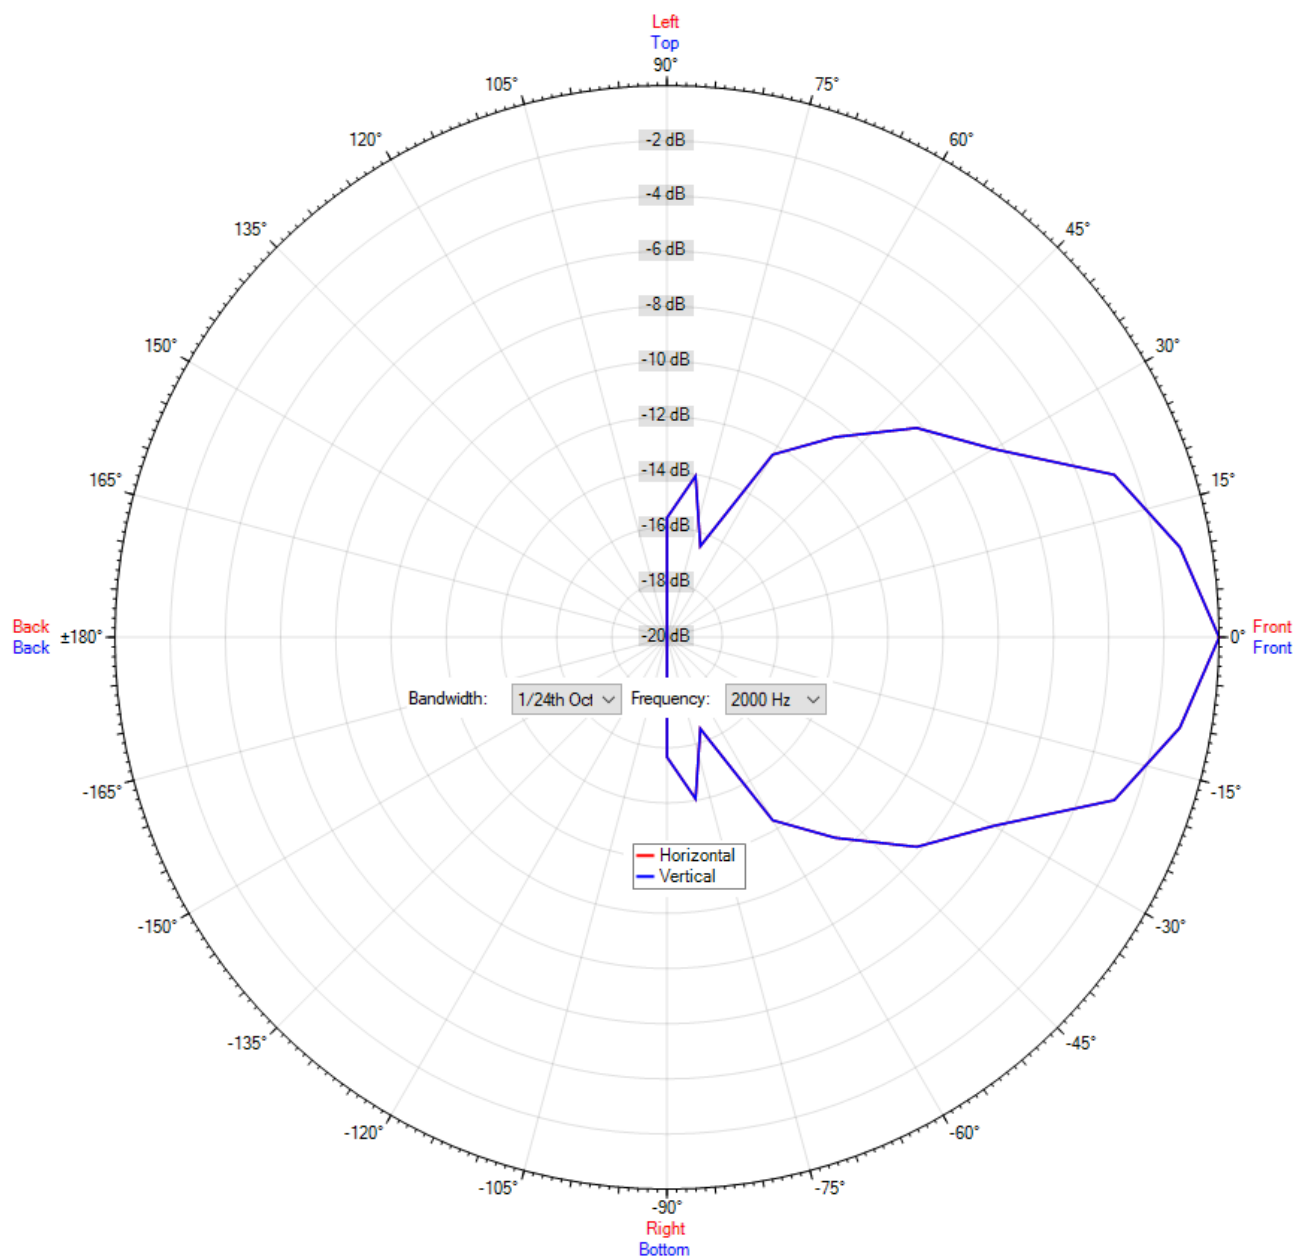

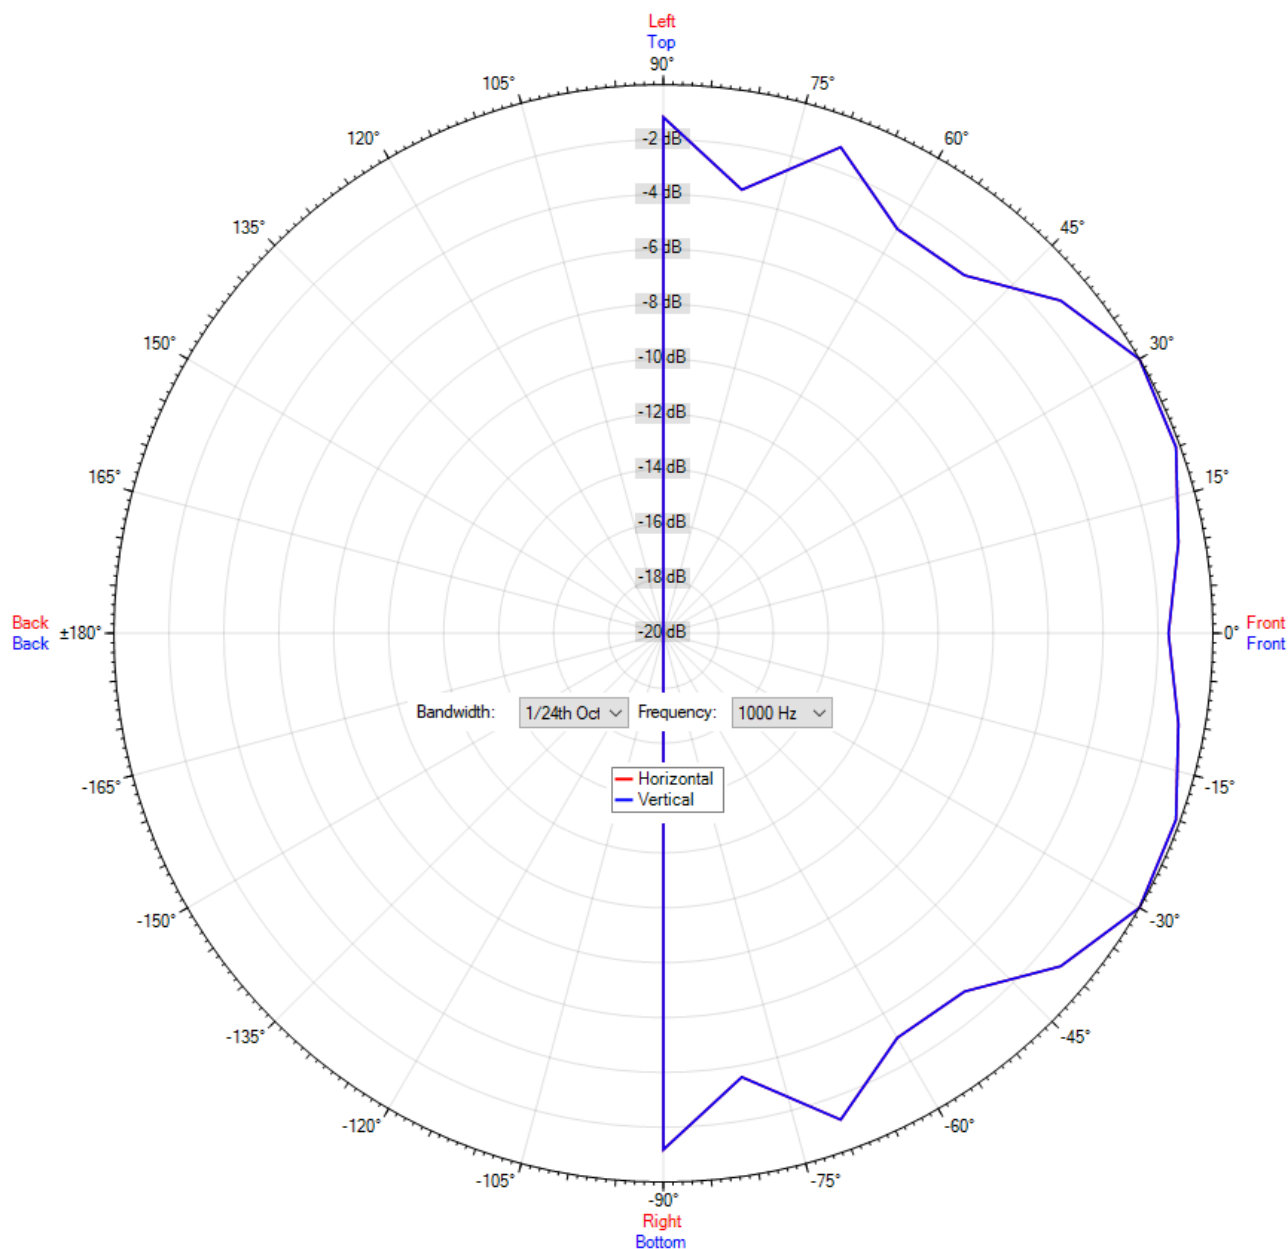

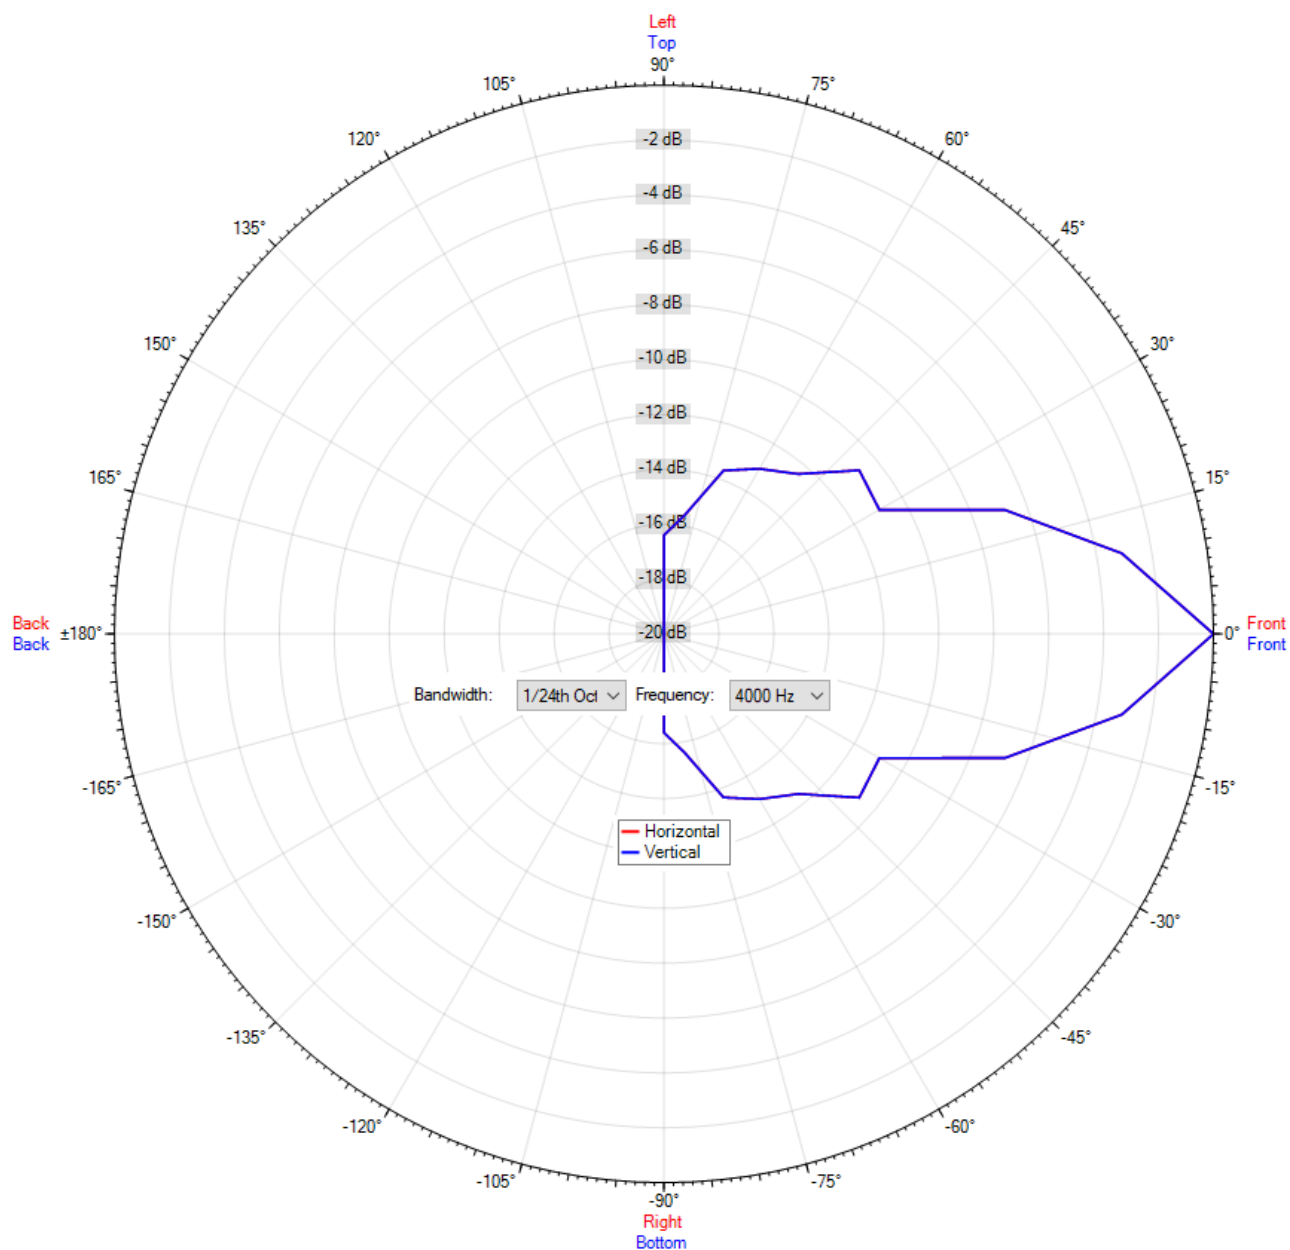

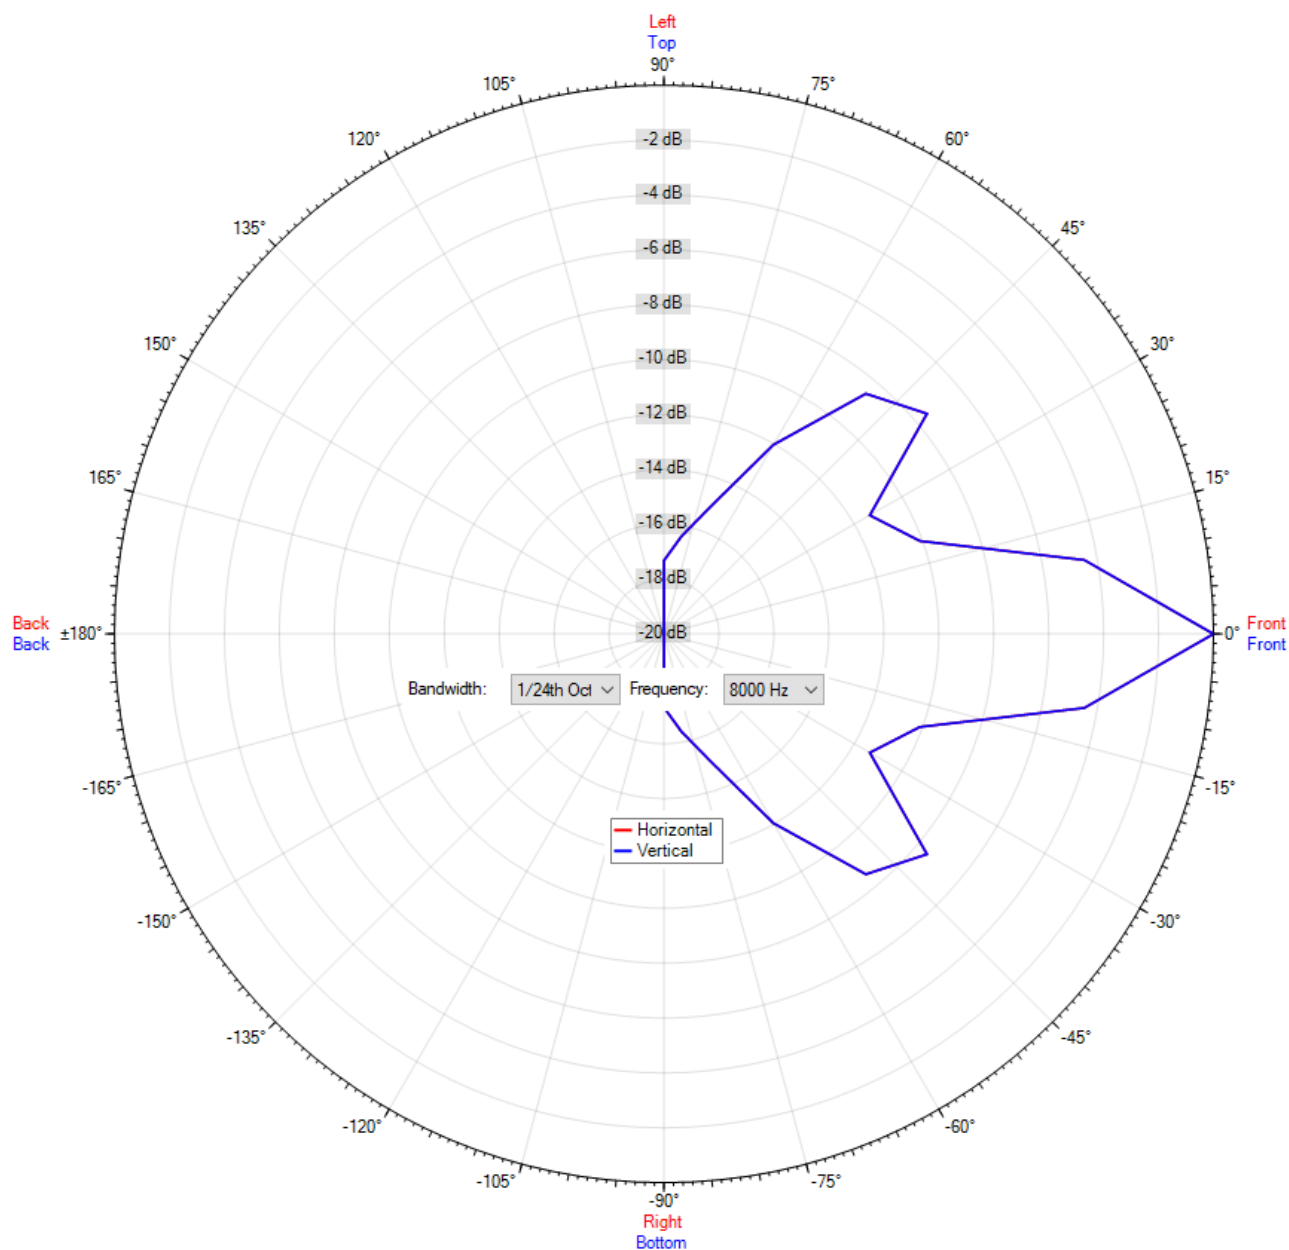

The IP rating specified is based on ic audio test results, not on CNBOP-PIB test results. Certification only verifies the minimum requirements for EN54-24 compliance.

ic audio GmbH • Boehringerstraße 14a • D-68307 Mannheim • Germany
 Fon: ++49 (0) 621 / 77096 -0 • Fax: ++49 (0) 621 / 77096 -26 • Email: info@ic-audio.com

Status: 2024-02-09

Packing Unit: 8

