



WU 06-66/T-EN54

- Superb sound coverage
- Aluminium cover
- BS 5839



EN 54-24:2008
Ref. Nr.: 009-13
ID-Code: SAA-LS09
1438-CPR-0450

ic audio GmbH, Boehringerstraße 14a,
D-68307 Mannheim, Germany

CE-Symbol gemäß Richtlinie 93/68EWG

The 6W powered speaker is equipped with a 66mm full-range loudspeaker chassis and a 100V transformer with 3 power adjustments. The sturdy aluminium front panel provides a low resonance sound. Included is also a flush-mounted high-impact housing in black. For additional reliability, a 2-pin ceramic block, and a thermal fuse are provided and the speaker chassis is impregnated against wetness.

The speaker is also secured with the protection class IP 21C against the security risks of environmental influences. It is also compliant with the British Standard BS 5839, Part 8.

Quick and easy mounting with screws.

Technical Data (Electrical)

Description	WU 06-66/T-EN54
Power	6/3/1,5 W
Impedance (100V)	1667/3333/6667 ohm
Frequency Range	156 - 20.000 Hz
Frequency Response	119 - 21.700 Hz
SPL IEC268-5, 1W/1m	85,0 dB
SPL EN54-24, Pmax/4m	81,0 dB
Sensitivity EN54-24, 1W/4m	73,0 dB
Sensitivity EN54-24, 1W/1m	85,0 dB
Dispersion -6dB, 500Hz	h=180° v=180°
Dispersion -6dB, 1KHz	h=180° v=180°
Dispersion -6dB, 2KHz	h=175° v=175°
Dispersion -6dB, 4KHz	h=160° v=160°


Technical Data (Mechanical)

Dimensions	120x120x102 mm
IP Rating	IP21
Weight (net)	0,71 kg
Temperature range	-10 / +55 C°
Mounting	Flush mounting
Connector	2-pin ceramic block
Colour	aluminium


Product Attributes




Technical Diagrams

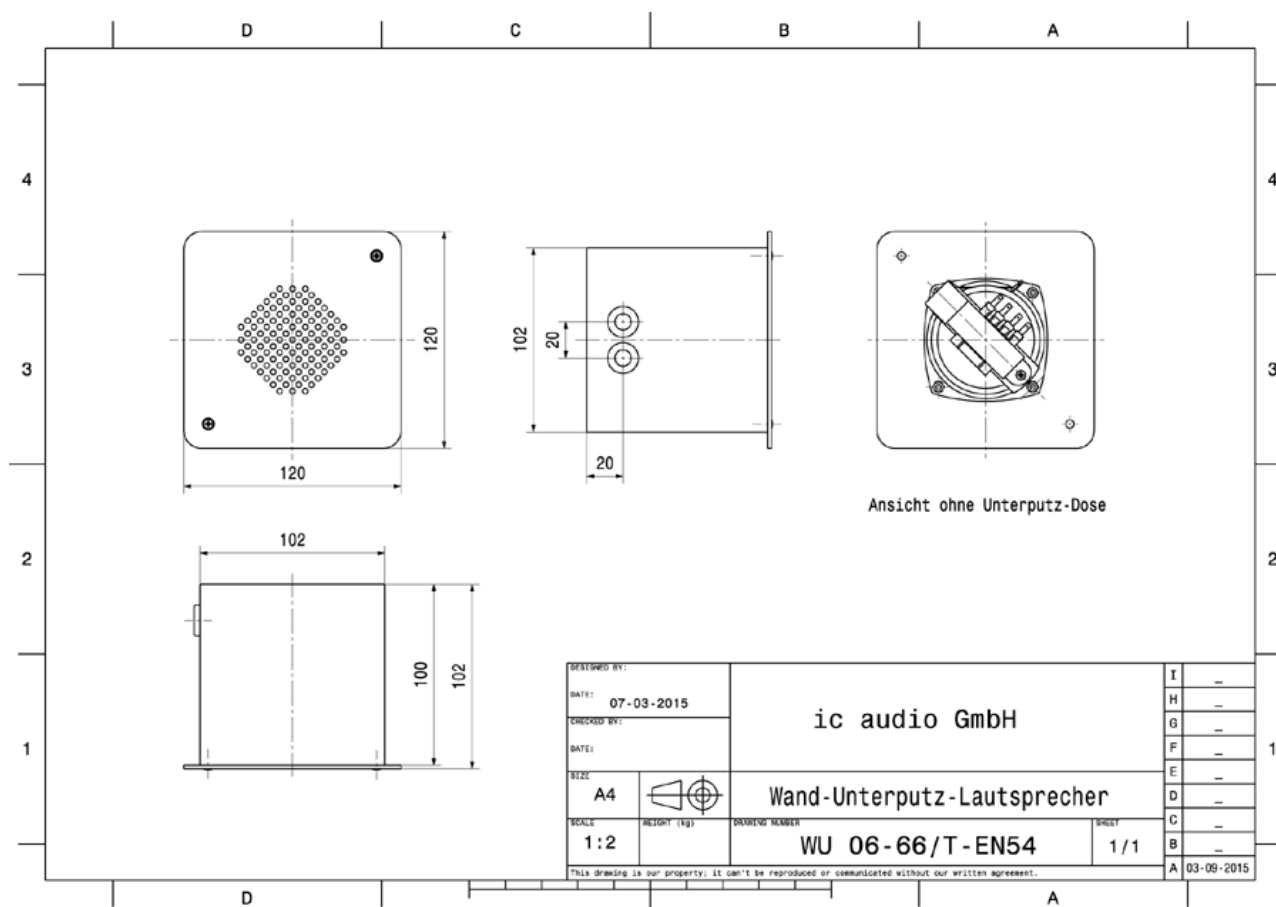

Frequency Response Diagrams

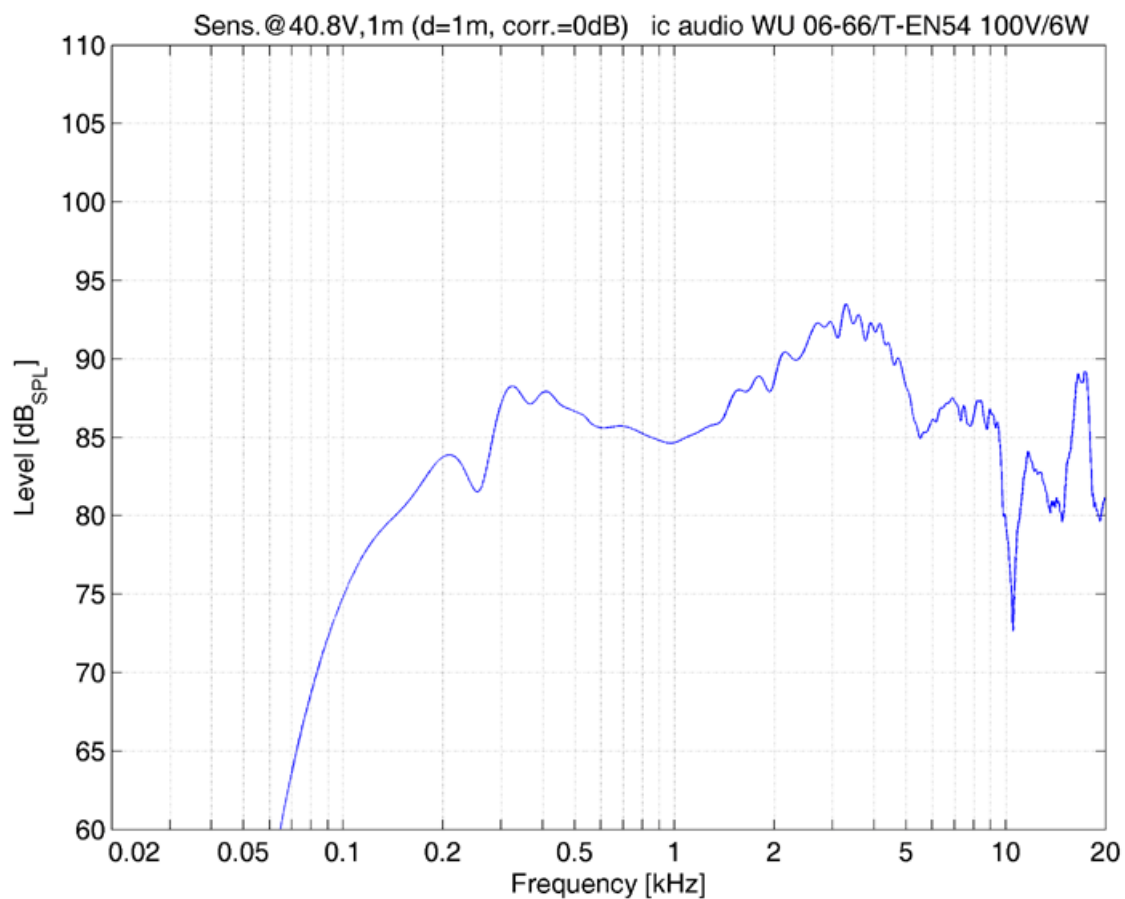


Polar Diagrams

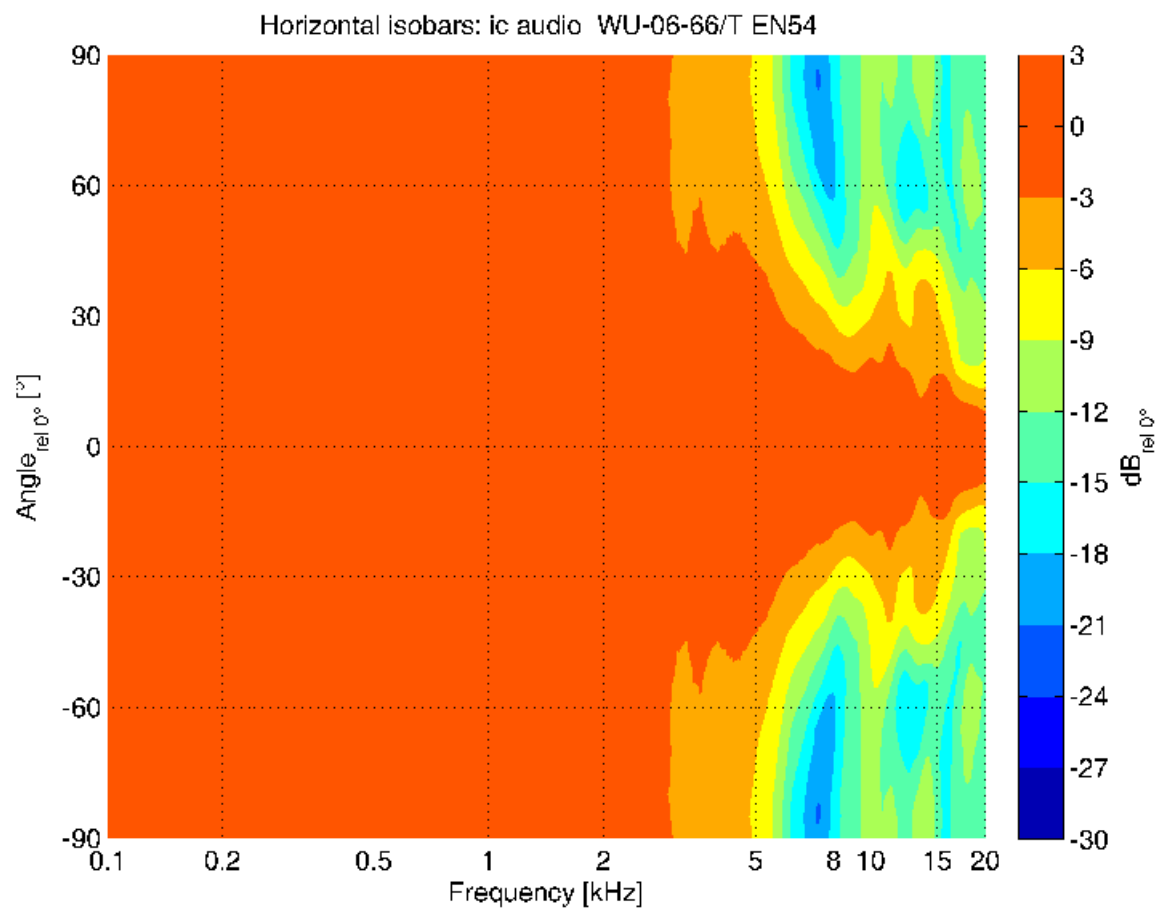

ic audio loudspeakers are tested and classified according to the IEC standard 60529 (degree of protection by enclosure) against the penetration of foreign objects and moisture. The classification is conforming to standards through characterization with a fixed code. This code consists of the letters IP (International Protection) followed by two digits. The first digit indicates the degree of protection against dust and the second digit the degree of protection against water. Please note that the testing of the products has been carried out in laboratory conditions which are not always 100% comparable with the conditions of different installation environments. This protection can be reduced due to normal wear and tear depending on the installation environment.

RoHS compliant (2011/65/EU)

The IP rating specified is based on ic audio test results, not on CNBOP-PIB test results. Certification only verifies the minimum requirements for EN54-24 compliance.



Article Nr.: 20142911

Packing Unit: 18

